



HGL Part Number	Schematic Drawing #	Approx Weight (LBS)
HGL0020AW3S0000	30586-1	125
HGL0020AW3C000	30586	126
HGL0020AW3S1000	30586-PQ1	128
HGL0020AW3C1000	30586-PQ	130

Unit Specifications						
HP	kVar	Harmonic	Volt	Maximum Amps (A)	HZ.	Phase
20	3	5TH	480	27	60	3

Note: For Torque Information
See IOM Manual

Customer Connections:
L1, T1, L2, T2, L3, T3
Wire Range: 1 AWG to 22 AWG.

Ground Lug
Wire Range: 1/0 to 14 AWG.

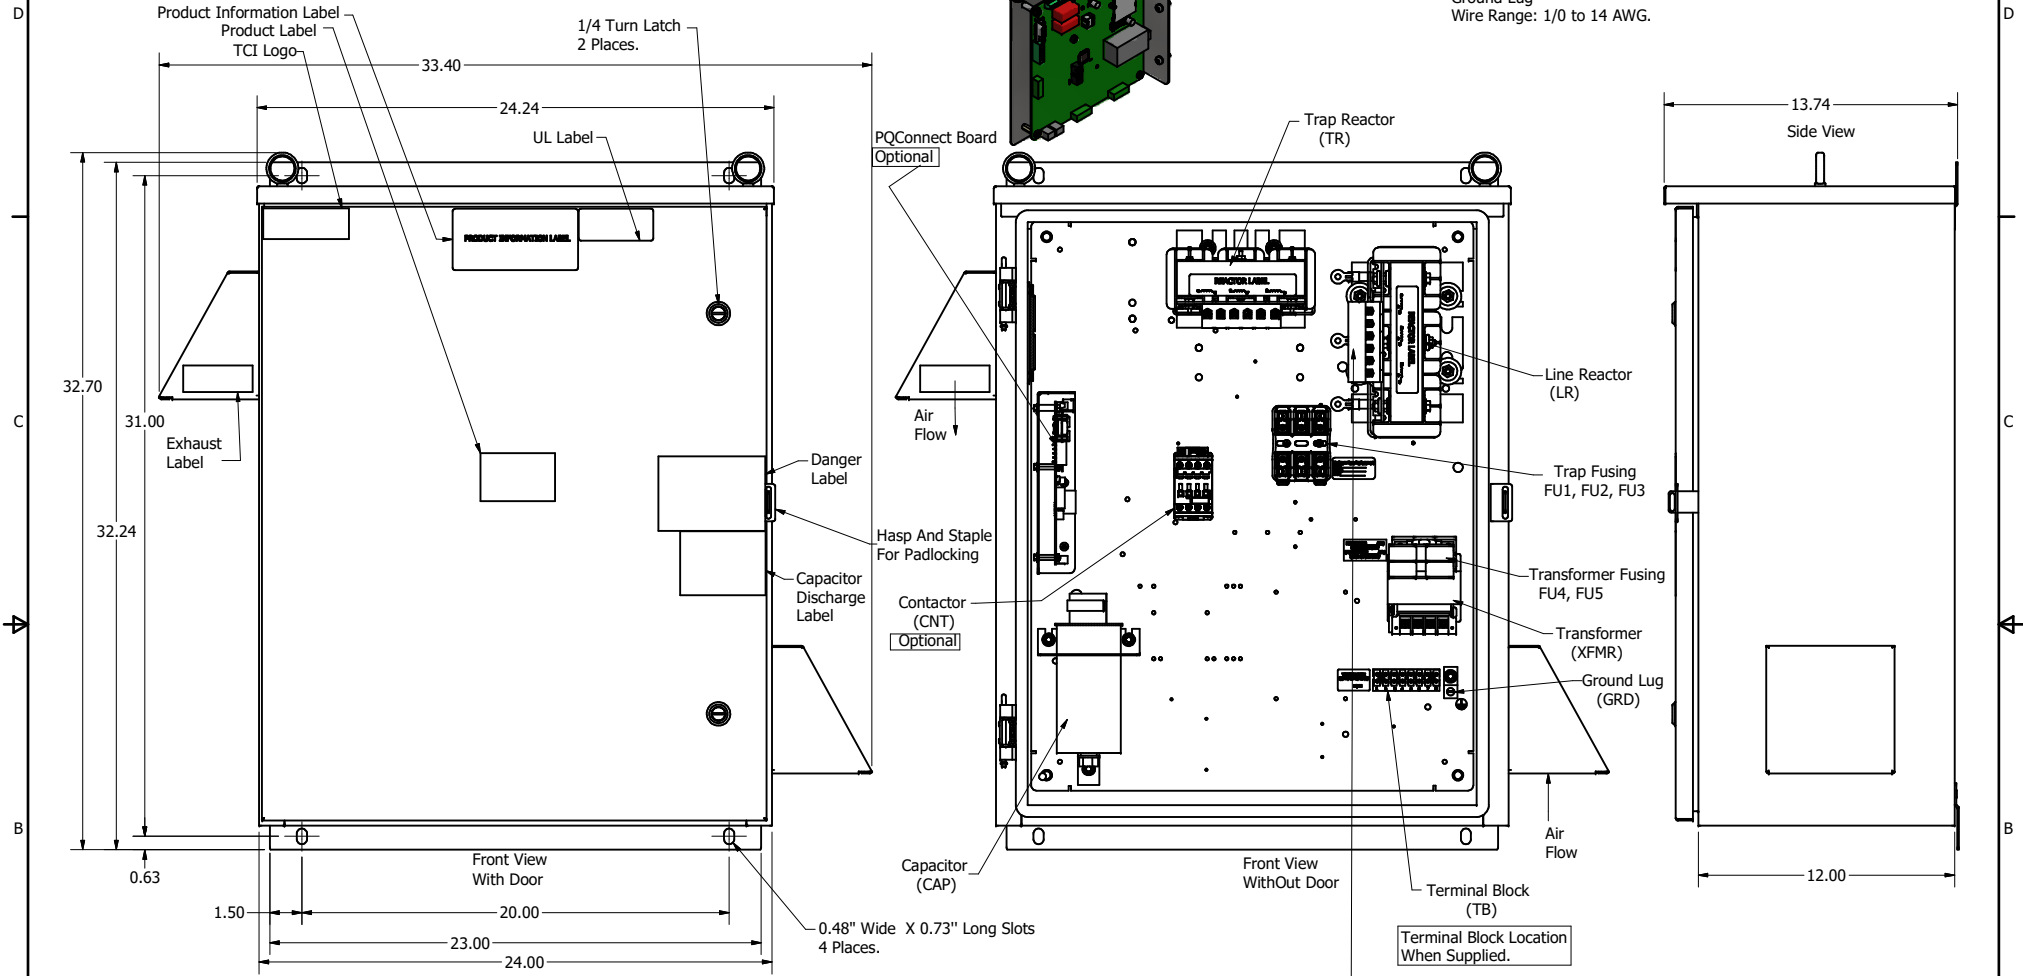

HGL0020AW3-----				
Components	S0000	C0000	S1000	C1000
Line Reactor (LR)	x	x	X	X
Trap Reactor (TR)	x	x	X	X
Capacitor (Cap)	x	x	X	X
Trap Fusing, FU1, FU2, FU3	x	x	X	X
Contactors (CNT)		x		X
Transformer (XFMR)	x	x	X	X
XFMR Fusing, FU4, FU5	x	x	X	X
PQConnect Board			X	X

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY
WITH UL514B FOR TYPE 3R ENCLOSURES

Customer Is Responsible For Installation to
Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.					TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10	W132N10611 Grand Drive Germanstown, WI 53022 © 2021 TCI, LLC An Official Motion Company Harmonic-Guard Low Capacitance HGL_20HP, 480/3/60, Type 3R		
	C	5656, GE to ABB CNT change	11/5/2021	DSW	FRACTIONAL ± 1/16		DESIGNED BY: DSW DATE: 8/14/17 SCALE: 1/8 DRAWN BY: [blank] DATE: [blank] CHECKED BY: [blank] DATE: [blank]	
	B	Add PQConnect	2/13/19	DSW	ANGULAR ± 1°			107198DG SHT 1 OF 1
	NO	REVISION	DATE	BY				