



Unit Specifications					
kVar	Harmonic	Volt	HZ.	Phase	HP
3.1	5TH	600	60	3	20

Note: For Torque Information  
See IOM Manual

Customer Connections.  
L1, T1, L2, T2, L3, T3  
Wire Range: 1 AWG to 22 AWG.

Ground Lug  
Wire Range: 1/0 to 14 AWG.

HGL Part Number	Schematic Drawing #	Approx Weight (LBS)
HGL0020CW3S0000	30807-25	130
HGL0020CW3C0000	30807-25C	131
HGL0020CW3S1000	30807-PQ2	132
HGL0020CW3C1000	30807-PQ3	133

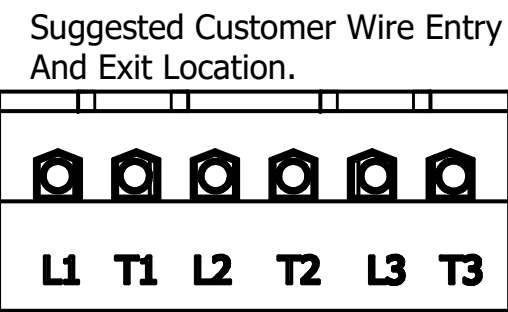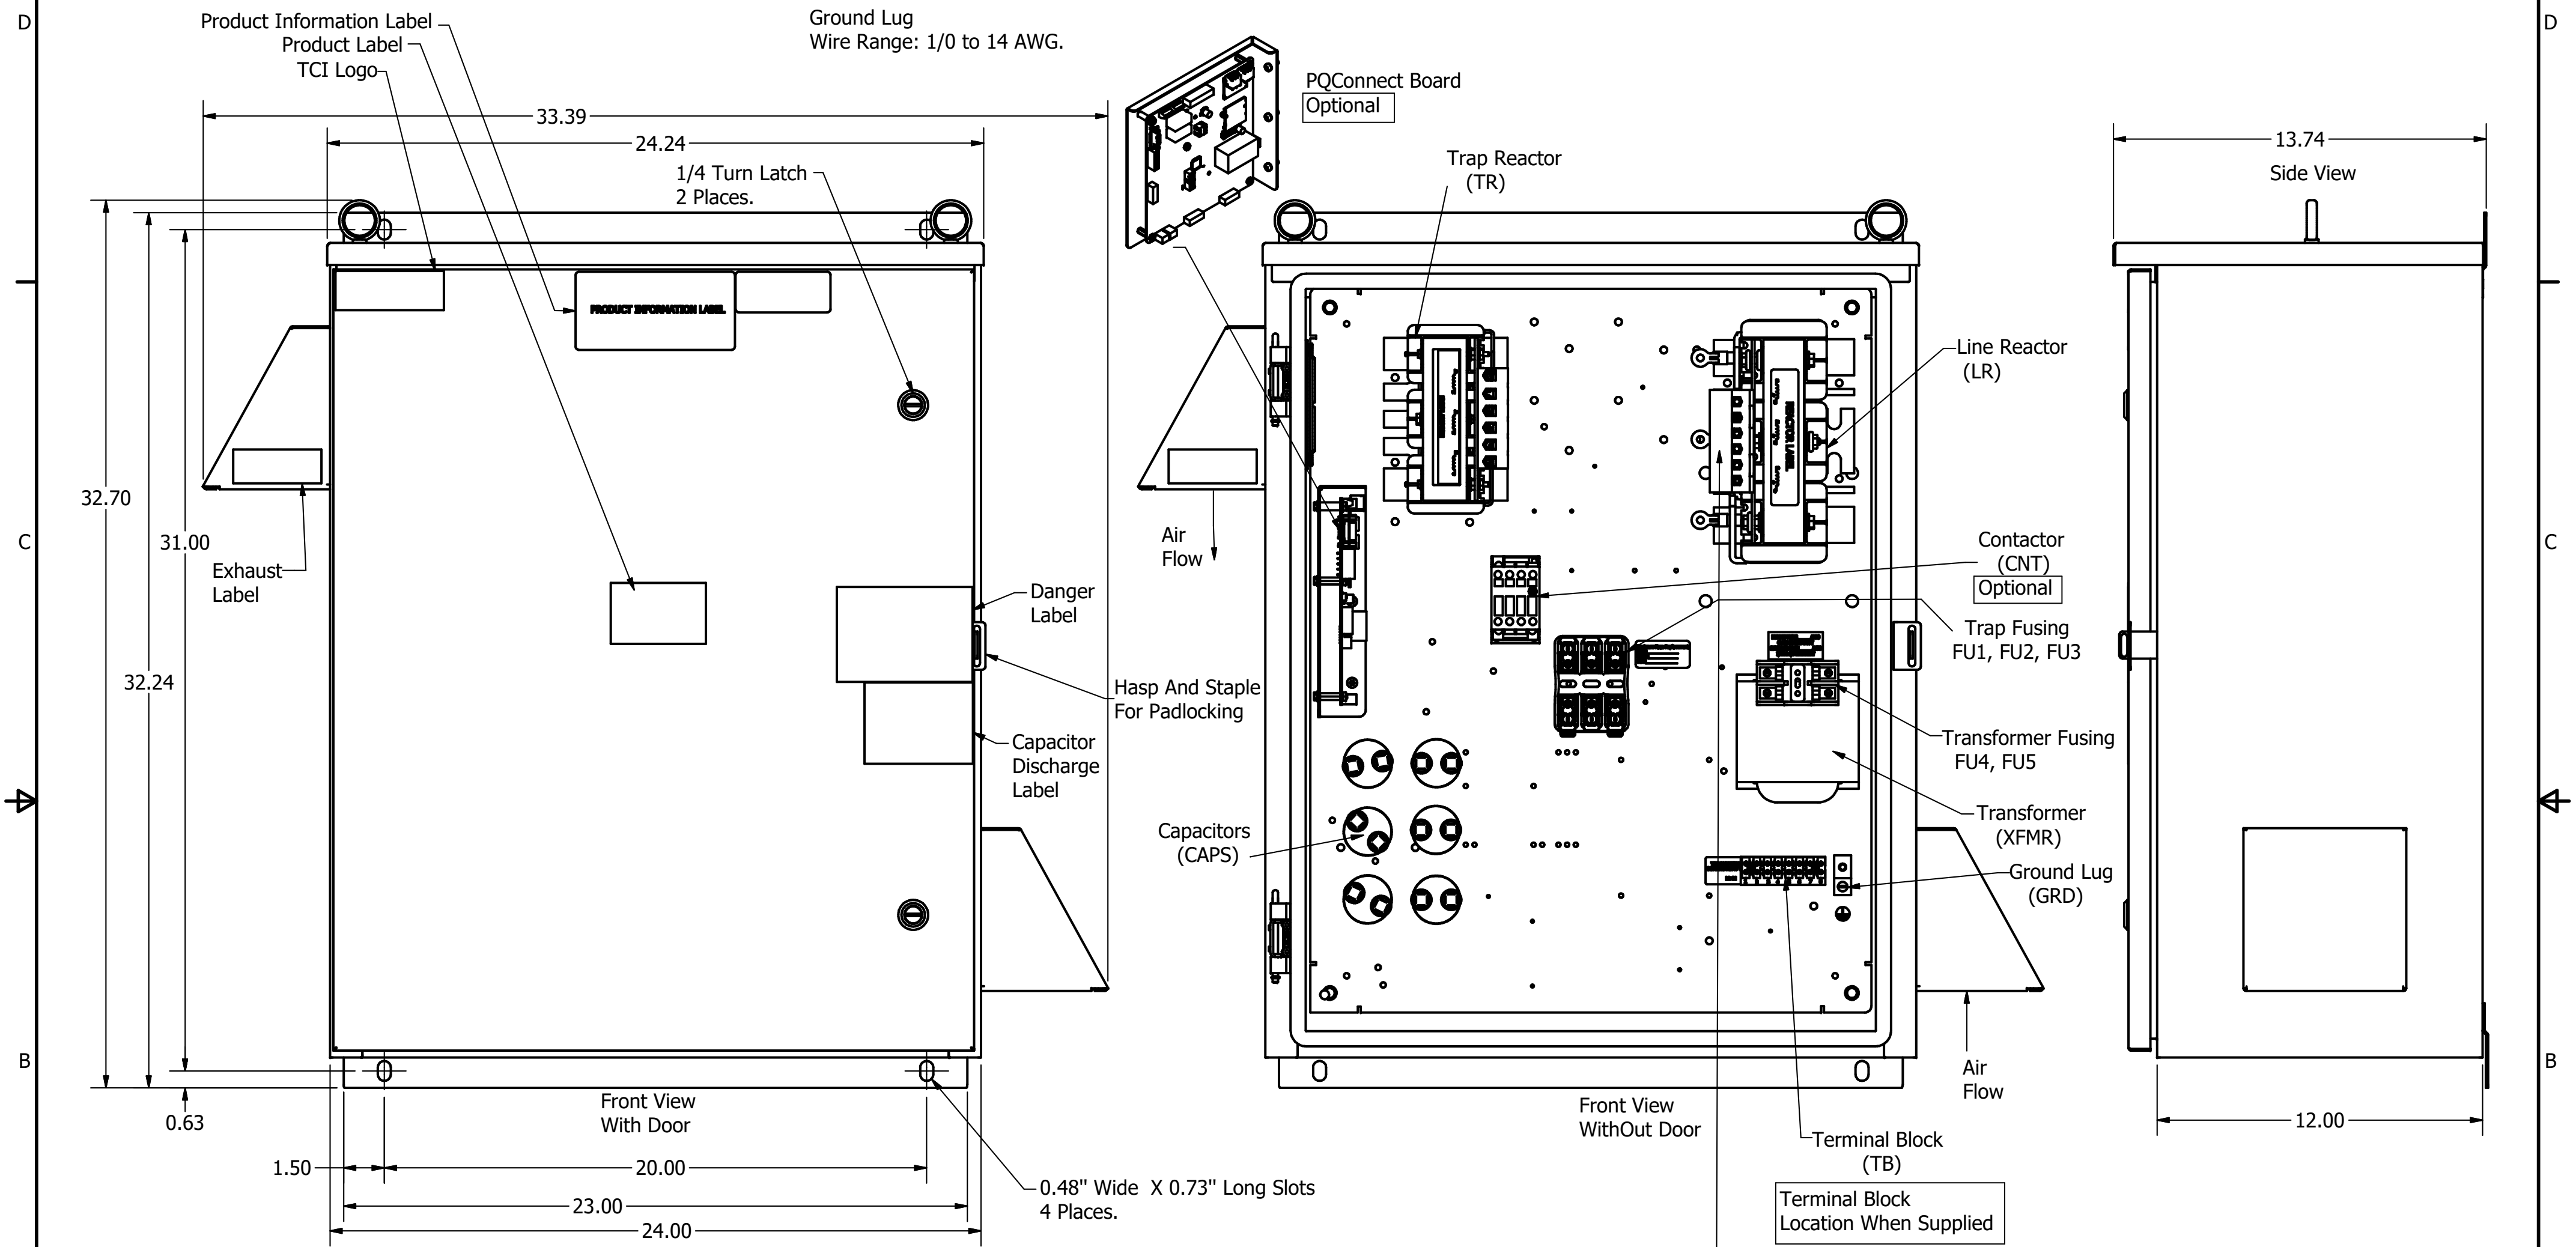

HGL0020CW3-----				
Components	S0000	C0000	S1000	C1000
Line Reactor (LR)	x	x	X	X
Trap Reactor (TR)	x	x	X	X
Capacitor (Cap)	x	x	X	X
Trap Fusing, FU1, FU2, FU3	x	x	X	X
Contactor (CNT)		x		X
Transformer (XFMR)	x	x	X	X
XFMR Fusing, FU4, FU5	x	x	X	X
PQCconnect Board			X	X

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.				TOLERANCES (EXCEPT AS NOTED)	W132 N10611 Grant Drive Germantown, WI 53022 HarmonicGuard Low Capacitance HGL, 20HP, 600/3/60, Type 3R
				DECIMAL	
				.XX ± .25 .XXX ± .10	
				FRACTIONAL ± 1/16	
	B Add PQCconnect	3/12/19		ANGULAR ± 1°	DRN BY: DSW SCALE: 1/8 DATE: 8/14/17 APRVD: 107329DG SIZE C SHT 1 OF 1