
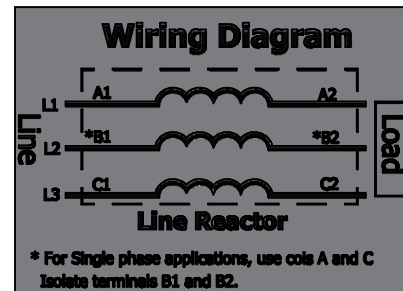


2				1			
208/240 Rated Voltage, 600 Max Voltage, Low Z, Impedance.							
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)	Attached Lug Kit	Losses (W)
KDRULF24L	30	88	100	116	30	SLK10	135
KDRULF25L	40	114	118	88.6	30	SLK10	149
KDRULF26L	50	143	152	69.9	30	SLK21	154

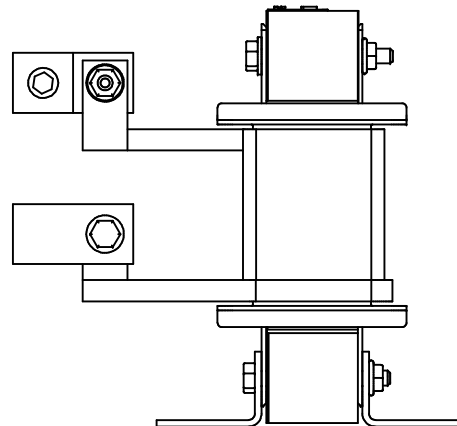


Notes:

1. UL file number: cULus Listed File E116124.
2. KDR Drive Reactors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
3. KDR IOM Manual Part Number 30895
4. NEC Current For 208/240 Volts, Horsepower Based On 208 Volts.
5. Material(s) Shall be RoHS Compliant
6. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

B	6516, Copper bus to Flag	1/26/2024	DSW
NO	REVISION	DATE	BY

TOLERANCES (EXCEPT AS NOTED)			W132N10611 (Trans 11/16/22) Germantown, WI 53022 © 2024 TCL, LLC	
DECIMAL				
.XX ± .25 .XXX ± .10				
FRACTIONAL	KDRUL F Frame, (Flag)			
± 1/32	Inductor Drawing			
ANGULAR	DWN BY: DSW SCALE: 1:1.5		DATE: 12/13/2023 SIZE: 107573-8DG	
± 1°	SHEET: 05 of 05			