480 Rated Voltage, 600 Max Voltage, Low Z, Impedance.

Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)	Losses (W)	Terminal Hole Size (Inches)
KDRG1HC4	150	180	185	181	95	245	0.28

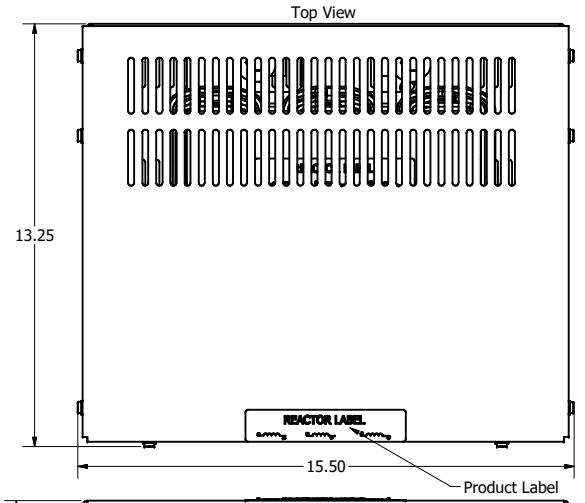

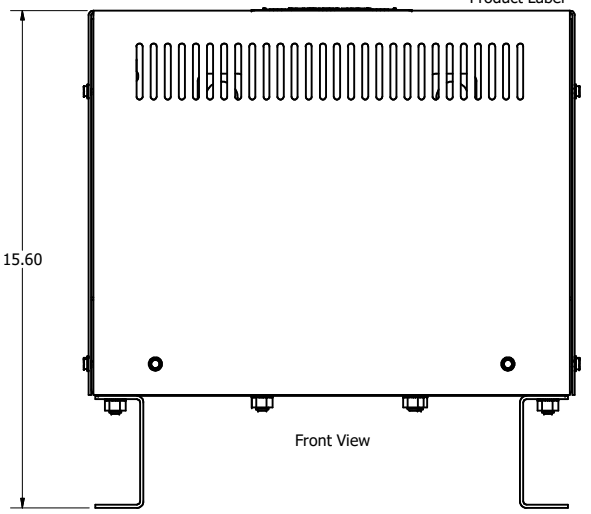

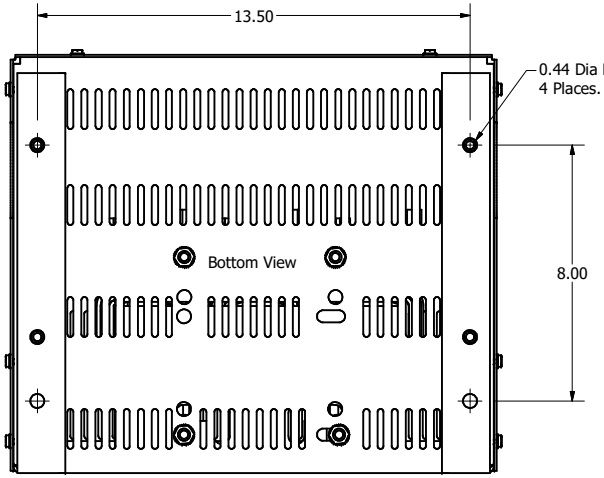

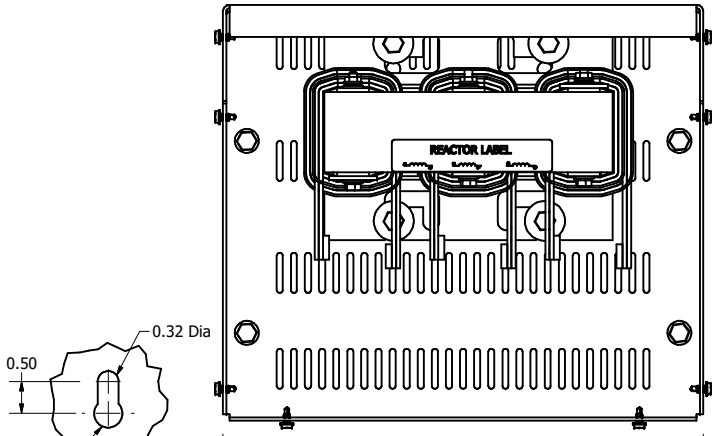



DETAIL B
SCALE 2 / 3

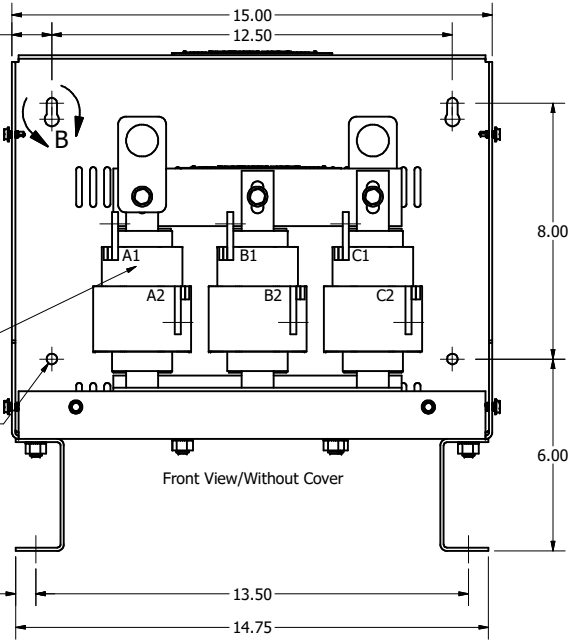

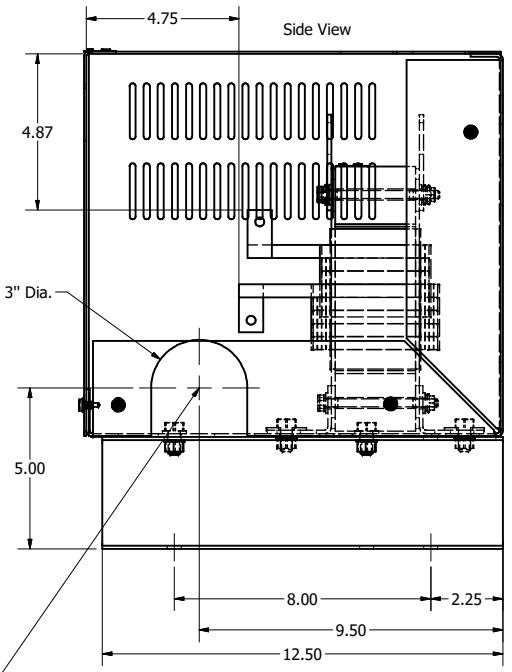



Notes:
1. Material(s) Shall be RoHS Compliant
2. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

NO	REVISION	DATE	BY
B	6677, Update Flag To 32766	5/22/2024	DSW
A	5270, Was Drawing KDR-14		
A	UPDATE TERMINALS	5/19/2020	DSW

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ± .25
.XXX ± .10
FRACTIONAL
± 1/32
ANGULAR
± 1°

TCI An Allied Motion Company
W132N10611 Grant Street
Germantown, WI 53022
© 2024 TCI, LLC

KDR, 480V, 185A, 150HP, 3 Phase, UL Recognized

DRN. BY: DSW | DATE: 5/19/2020 | KDR-14-1DG
SCALE: 1/2 | APRVD: | SIZE: C | SHT 1 OF 1