

208/240 Rated Voltage, 600 Max Voltage, Low Z, Impedance.





Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)	Terminal Hole Size (Inches)	Losses (W)
KDRF24LC4	30	88	100	116	65	0.28	135
KDRF25LC4	40	114	118	88.6	65	0.28	149
KDRF26LC4	50	143	152	69.9	65	0.28	154

575 Rated Voltage, 600 Max Voltage, Low Z, Impedance.

Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)	Terminal Hole Size (Inches)	Losses (W)
KDRF45LC4	100	99	99	272	65	0.28	194


480 Rated Voltage, 600 Max Voltage, Low Z, Impedance.

Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)	Terminal Hole Size (Inches)	Losses (W)
KDRF3LC4	75	96	110	196	65	0.28	193

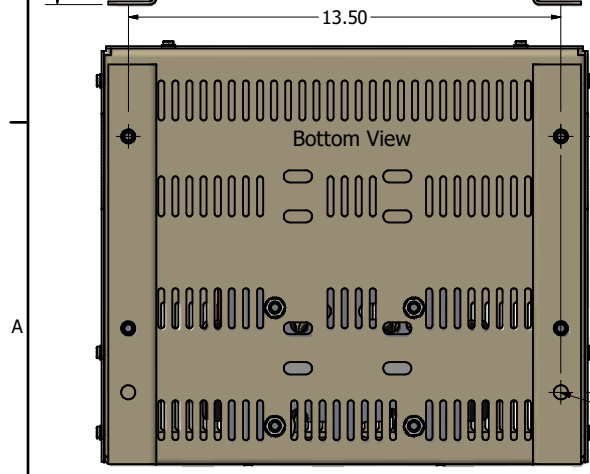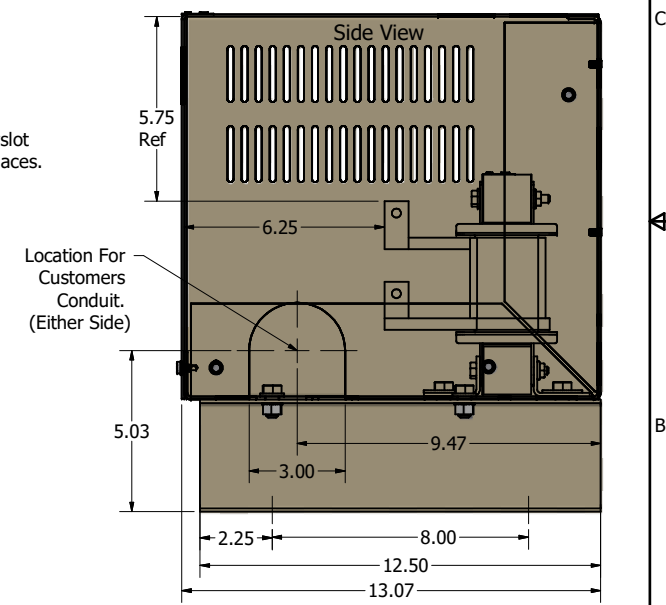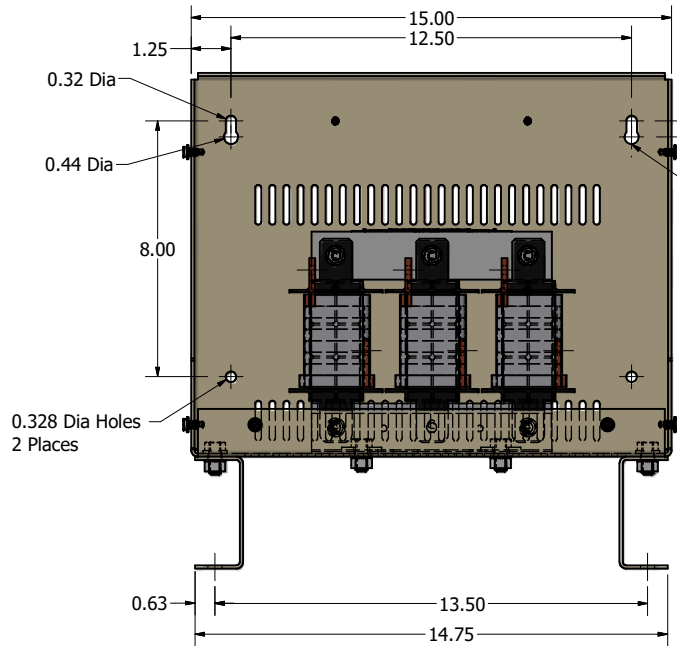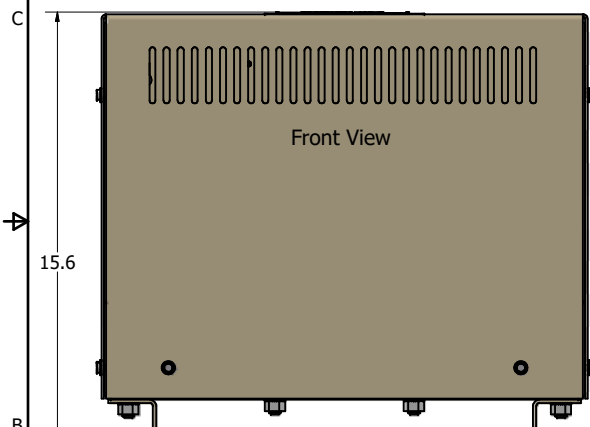

Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.						TOLERANCES (EXCEPT AS NOTED)		 W132N10611 (Rev 13) Rev 6 Germantown, WI 53022 © 2024 TCI, LLC An Allied Motion Company KDR (F Frame) Enclosed	
B	6638, Change to Flag Termination	4/17/2024	DSW	FRACTIONAL	± 1/32	DRN BY	DATE	03/06/2004	KDR-38DG
A	2289, Term Change	2/25/2004	DSW	ANGULAR	± 1°	SCALE	1/3	REVISED	FIG
NO	REVISION	DATE	BY					SHT 1 OF 1	