Top View

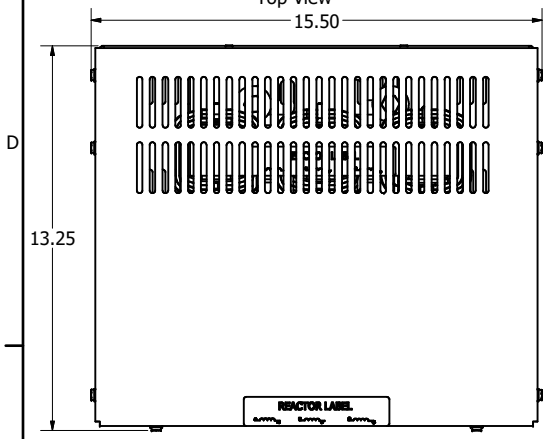

Top View/Without Cover

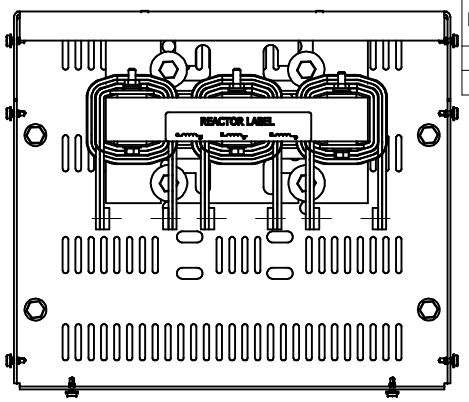

575 Rated Voltage, 600 Max Voltage, Low Z, Impedance.							
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Losses (W)	Weight (LBS)	Terminal Hole Diameter (Inches)
KDRH43LC4	125	125	125	203	261	70	0.28
KDRH44LC4	150	144	144	215	253	75	0.28

208/240 Rated Voltage, 600 Max Voltage, High Z, Impedance.							
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Losses (W)	Weight (LBS)	Terminal Hole Diameter (Inches)
KDRH23HC4	60	169	169	103	220	75	0.28

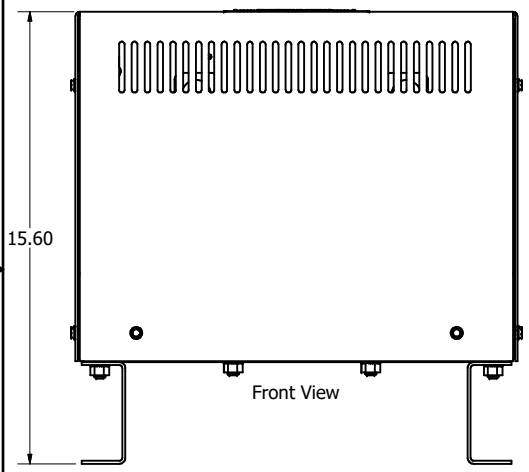

Front View

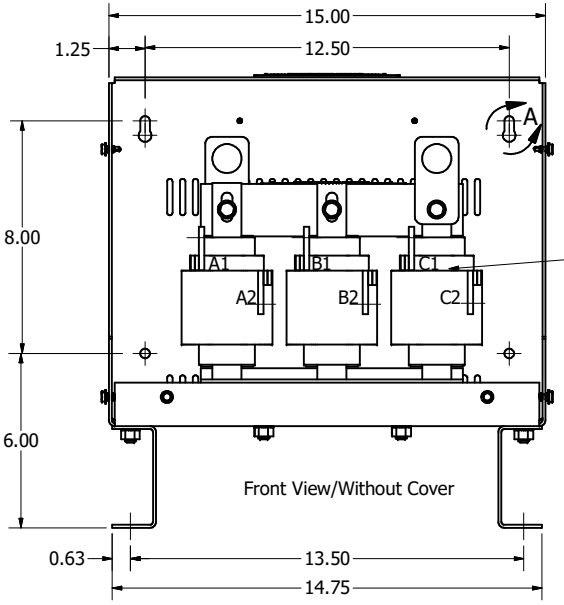

Front View/Without Cover



DETAIL A

(Customer Connections) Markings On Coils For Reference Only.

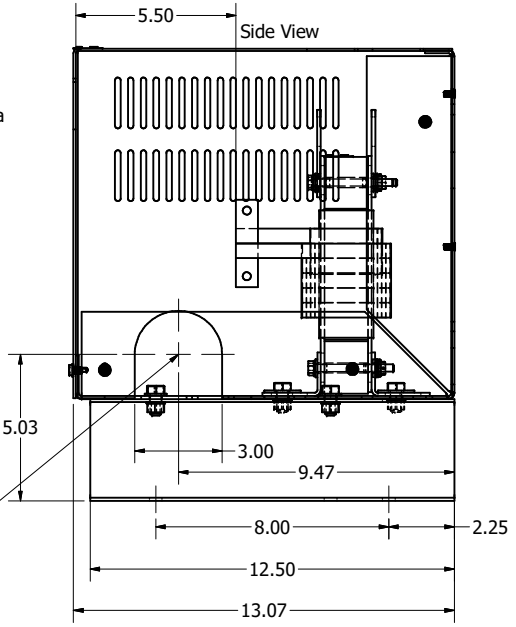

Location Of Customer Conduit Fittings (Both Sides)

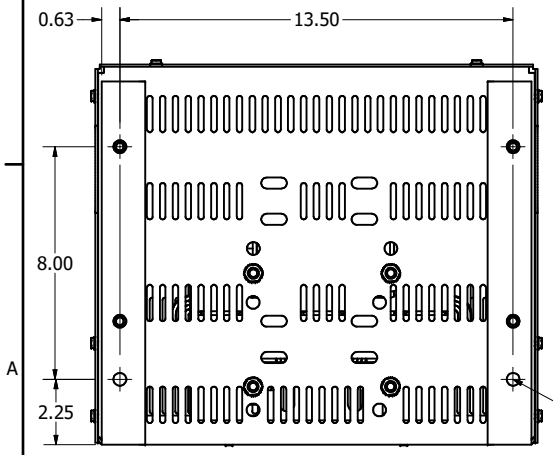

Bottom View

0.44 Dia Mounting Holes 4 Places.



Notes:

1. Material(s) Shall be RoHS Compliant
2. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

NO	REVISION	DATE	BY
B	6641, Busbar to flag	4/24/2024	DSW
A	2604 MARK REF	4/17/2009	DSW

TOLERANCES (EXCEPT AS NOTED)
DECIMAL .XX ± .25 .XXX ± .10
FRACTIONAL ± 1/32
ANGULAR ± 1°

TCI An Allied Motion Company
W132N10611 Grant Drive
Germantown, WI 53022
© 2024 TCI, LLC

KDR H Frame
Enclosure, C4

DRN. BY: DSW | DATE: 03/05/2003 | KDR-41DG
SCALE: 1/3.3 | APRVD: | SIZE: C | SHT 1 OF 1