


TCI PERFORMANCE AND PROTECTION FOR DRIVES.
 TRANS-COIL, INC. MILWAUKEE WI WWW.transcoil.com 800-824-8282
 KDR Drive Reactor
 CATALOG# MOTOR HP AMPs
 3PH, 50/60Hz, 690V Max, --- A Max. RoHS
 CE


VOLTAGE 690V	NEC MOTOR HP	CATALOG NO	NEC MOTOR CURRENT	AMPS MAX	WATTS LOSS	APPROX WT-LBS
OUTPUT	7.5	KDRA34PDRV	9	12	NOTE:1	5

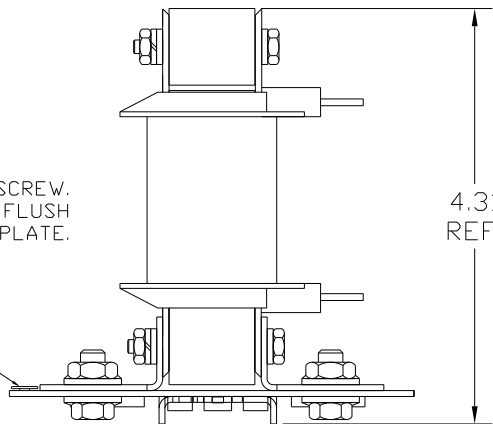


6-32 SET SCREW.
SCREW MUST BE FLUSH
WITH BOTTOM PLATE.

NOTE 1: WATTS LOSS WILL VARY DUE TO FUNDAMENTAL FREQUENCY,
CARRIER FREQUENCY AND OTHER SYSTEM CHARACTERISTICS.
KDR DRIVE REACTORS COMPLY WITH THE THERMAL AND
ALTITUDE STANDARDS SET FORTH BY NEMA ST20-1992..

NOTE: CUSTOMER CAN CHANGE
MOUNTED REACTOR, FROM VERTICAL
TO HORIZONTAL ON DIN BRACKET.

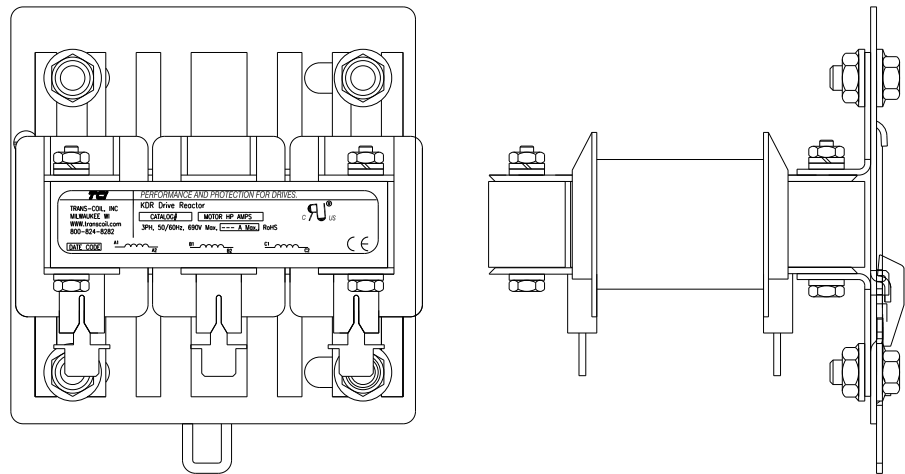

TCI'S DIN RAIL MOUNTED REACTORS FIT STANDARD 35mm DIN RAIL.
TCI'S MINIMUM RECOMMENDATION IS TO USE:
HIGH PROFILE STANDARD 35mm STEEL RAIL
OR HEAVY DUTY STANDARD 35mm STEEL RAIL.

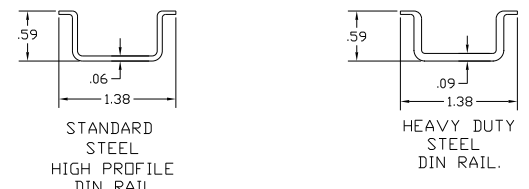

TCI RECOMMENDS TAKING PRECAUTIONS WHEN SHIPPING
MOUNTED REACTORS.

				TOLERANCES (EXCEPT AS NOTED)		TCI 7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL			
				.XX ± .03		KDR 690V DIN RAIL FRAME A	
				.XXX ± .01			
				FRACTIONAL		DRN BY DSW DATE 11/29/2011 DWG NO. KDRA34PDRV	
				± 1/32		C SHT. 1 OF 1	
				ANGULAR		SCALE NONE	
				± 1/2°		APRVD:	
NO	REVISION	DATE	BY				