

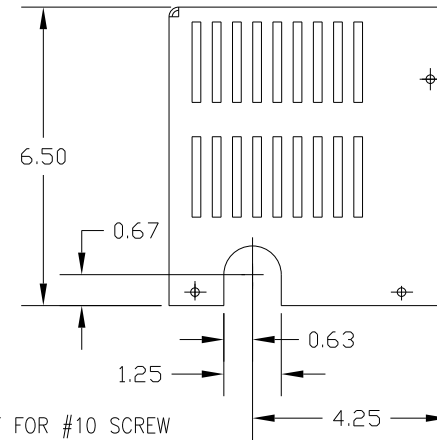
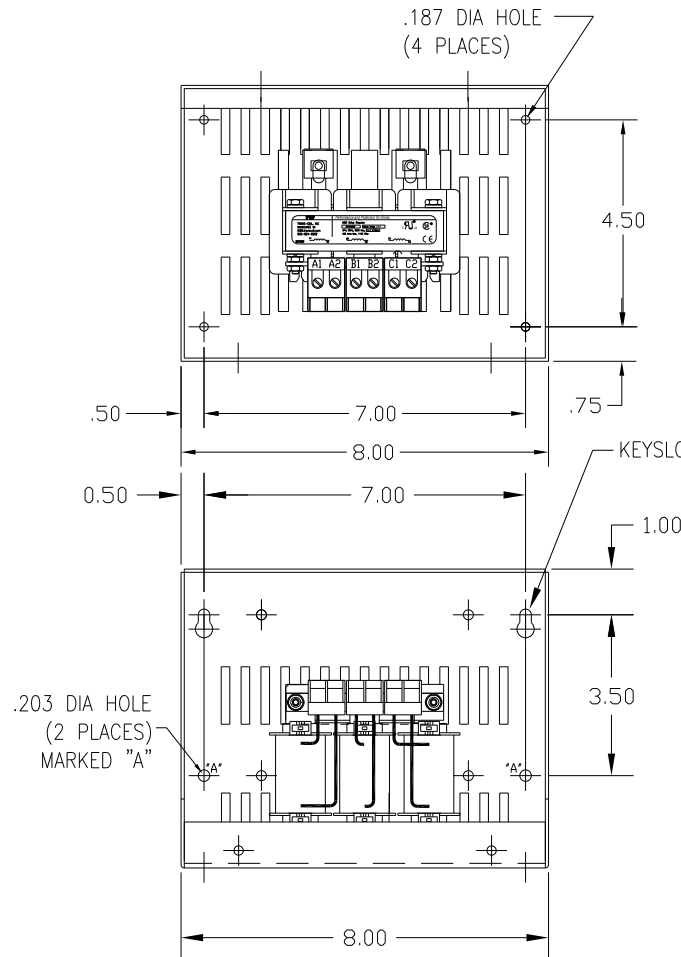


CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX WT-LBS	TORQUE (LB-IN)
KDRA9LC1	480	1.5	3.0	17.0	7	10

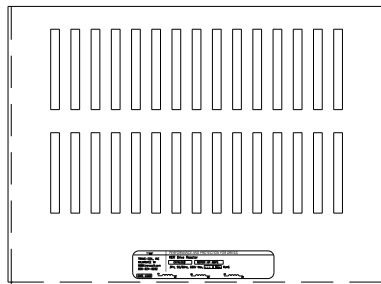

NOTE: A1, A2, B1, B2, C1, C2, MARKINGS ON TERMINAL BLOCK FOR REFERENCE ONLY.

BLOCK WIRE RANGE FOR REACTOR AND TIGHTENING TORQUE. #12-#18 AWG 10 LB-IN

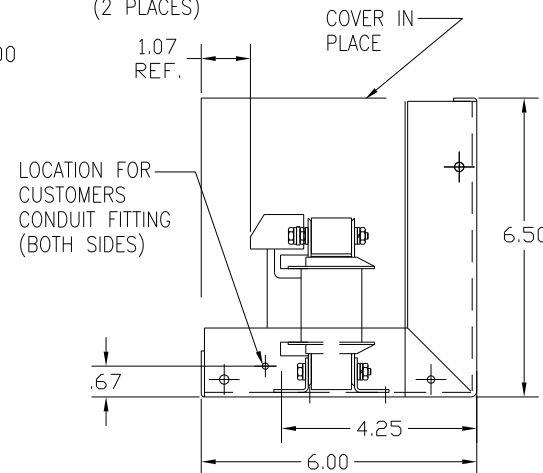

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

						TOLERANCES (EXCEPT AS NOTED):		 7878 N. 86th STREET MILWAUKEE, WI 53224		
						DECIMAL				
						.XX ± .03				
						.XXX ± .01				
						FRACTIONAL		KDR DRIVE REACTOR 480V LOW Z, FRAME A		
						± 1/32				
						ANGULAR		DRN. BY	DATE	DWG. NO.
						± 1/2°		DSW	1/25/12	B KDR A9LC1DG
								SCALE	APRVD.	
								SHT. 1 of 1		
NO	REVISION			DATE	BY					