
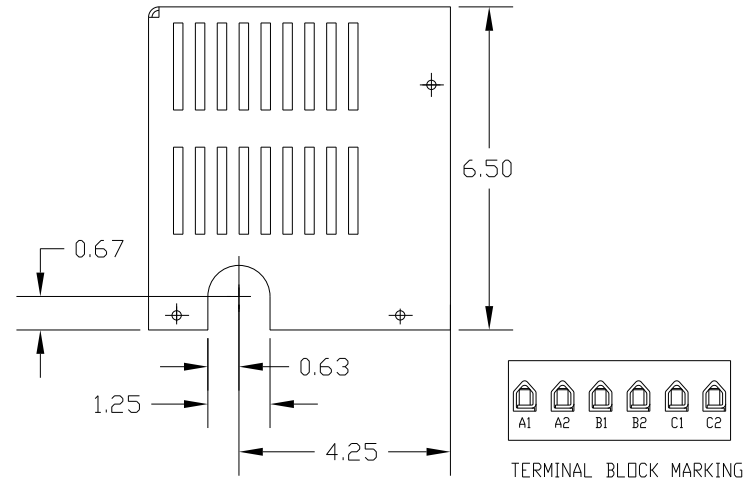
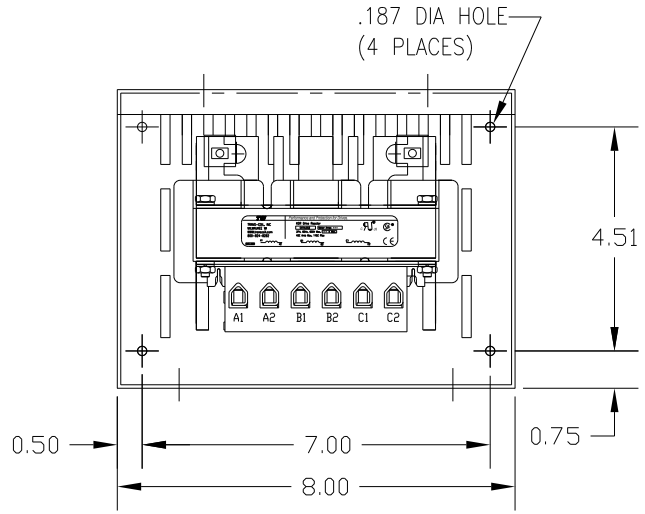




CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS	TERMINAL BLOCK TORQUE: (LB-IN)
KDRB44LC1	575/600	20	22	71.2	12	20

NEC MOTOR CURRENTS SHOWN IN THE 575/600 VOLT CHART ARE BASED ON HORSE POWERS AT 575 VOLT.

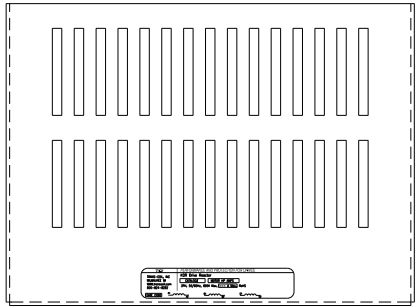

TERMINAL BLOCK MARKING

NOTE: A1, A2, B1, B2, C1, C2, MARKINGS ON TERMINAL BLOCK FOR REFERENCE ONLY.

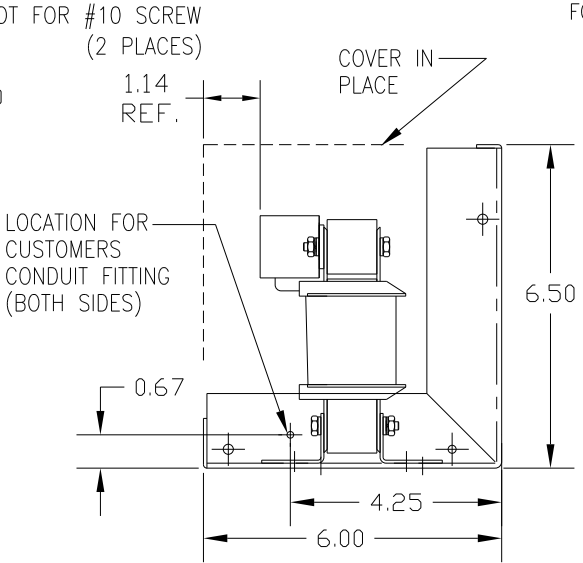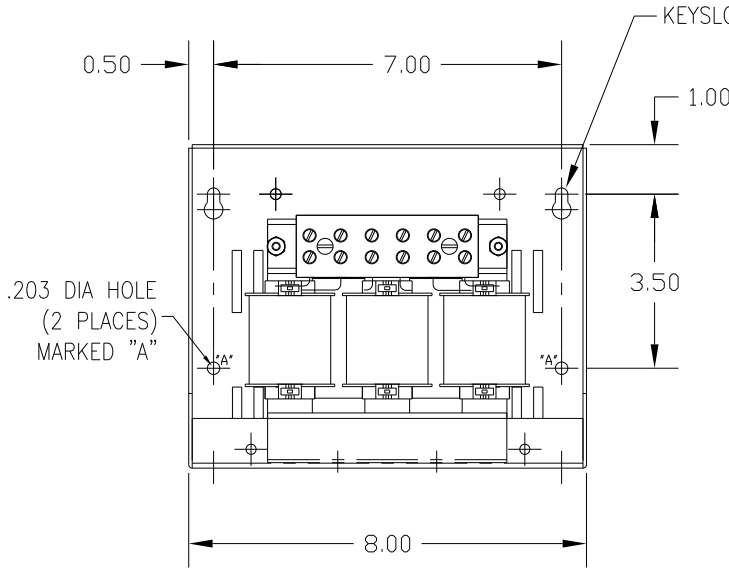

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

				TOLERANCES (EXCEPT AS NOTED)		7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL		KDR DRIVE REACTOR, ENCLOSED	
				.XX ± .03		600V HIGH Z, FRAME B	
				.XXX ± .01		DRN BY DSW DATE 1/26/12 DWG NO. B	
				FRACTIONAL		KDRB44LC1DG	
				± 1/32		SCALE	
				ANGULAR		APRVD.	
				± 1/2°		SHT. 1 OF 1	
NO	REVISION	DATE	BY				