




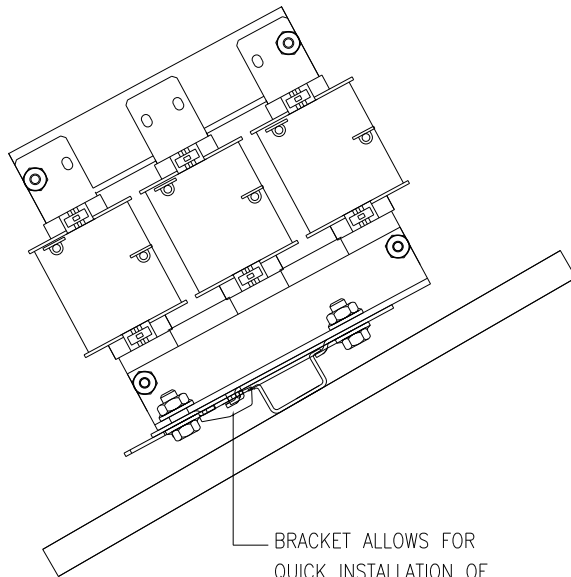

BRACKET ALLOWS FOR
QUICK INSTALLATION OF
REACTOR ON DIN RAIL.

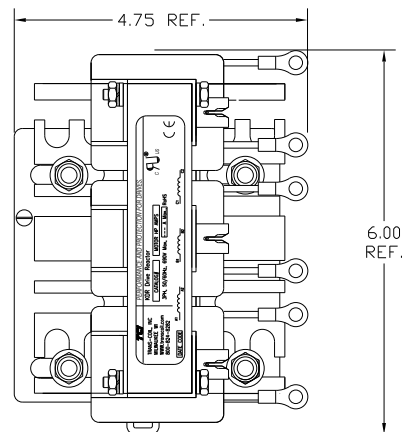


6-32 SET SCREW.
SCREW MUST BE FLUSH
WITH BOTTOM PLATE.

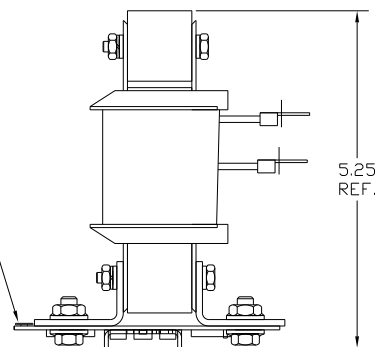


VOLTAGE	NEC MOTOR HP	CATALOG NO	NEC MOTOR CURRENT	AMPS MAX	WATTS LOSS	APPROX WT-LBS	RING LUG HOLE SIZE
690	15	KDRB45LDRV	17	19.5	66.2	8	.25

TCI'S DIN RAIL MOUNTED REACTORS FIT STANDARD SIZE DIN RAIL.
TCI RECOMMENDS USING HIGH PROFILE STANDARD STEEL RAIL
OR HEAVY DUTY STANDARD STEEL DIN RAIL.



STANDARD
STEEL
HIGH PROFILE
DIN RAIL.



HEAVY DUTY
STEEL
DIN RAIL.

TCI RECOMMENDS TAKING PRECAUTIONS WHEN SHIPPING
MOUNTED REACTORS.

TRANS-COIL, INC
MILWAUKEE, WI
WWW.TRANSCOIL.COM
800-824-8282

PERFORMANCE AND PROTECTION FOR DRIVES.

KDR Drive Reactor

CATALOG# MOTOR HP/AMPS

3PH, 50/60Hz, 690V Max, A Max, RoHS

CE

RU[®] US

DATE CODE

A1 A2 B1 B2 C1 C2

						TOLERANCES (UNLESS AS NOTED)		 7878 N. 86th STREET MILWAUKEE, WI 53224	
						DECIMAL XX ± .03 XXX ± .01		KDR 690V DIN RAIL FRAME B	
						FRACTIONAL ± 1/32			
						DECIMAL ± 1/2"			
						REV. BY	DATE	11/29/2011	DOC. NO.
						SCALE	NONE	APP'D	C KDRB45LDRV.DWG
									SW 1 of 1
						NO. REVISION DATE BY			