

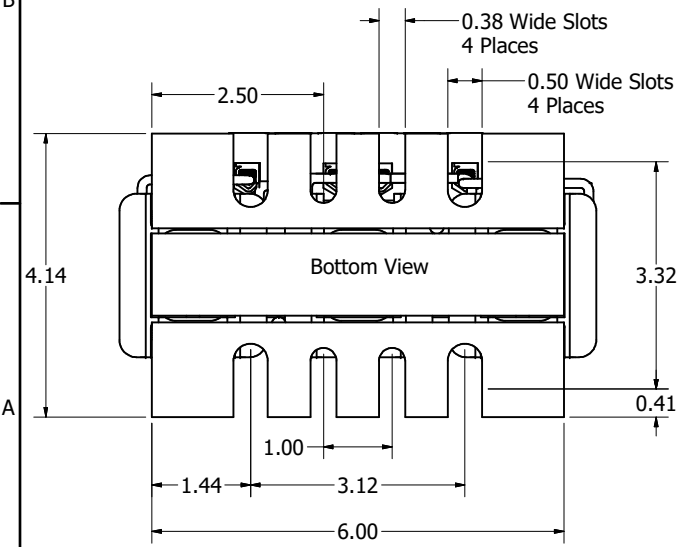
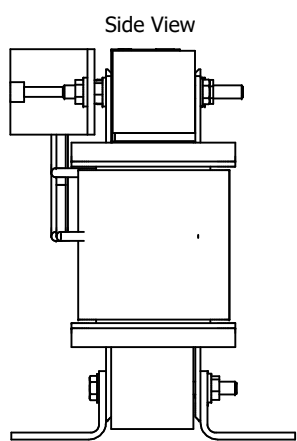



(Customer Connections)  
Markings On Terminal Block  
For Reference Only.

Wire Range: 4-18 AWG.  
Torque : 20 IN-LBS (2.3 Nm)

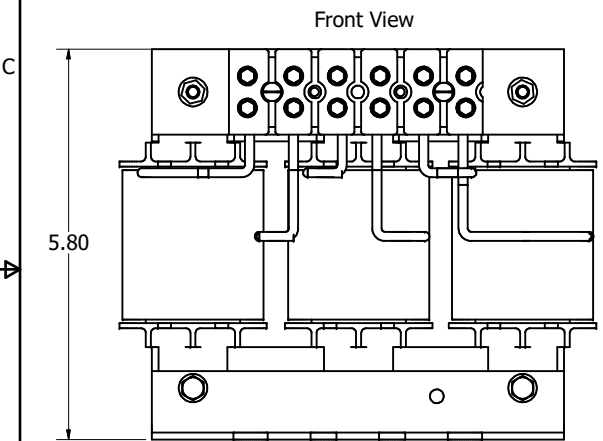


\* For Single phase applications, use coils A and C  
Isolate terminals B1 and B2.

480 Rated Voltage, 600 Max Voltage, Low Z, Impedance.					
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)
KDRC1L	40	52	55	387	15

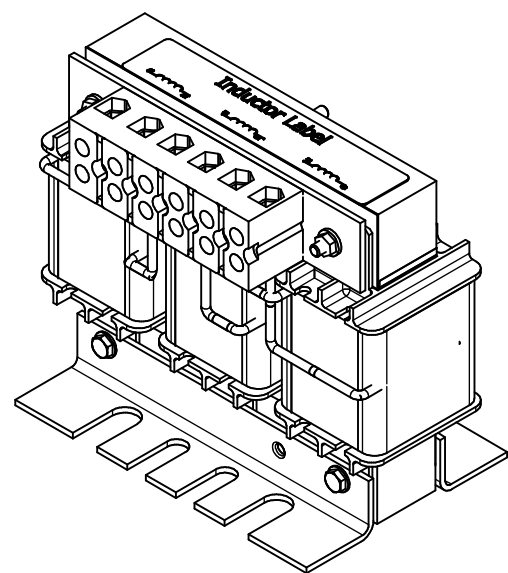

- Notes:
1. UL file number: cULus Listed File E116124.
  2. KDR Line Inductors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
  3. KDR IOM Manual Part Number 30895
  4. Material(s) Shall be RoHS Compliant
  5. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.
  6. Dimensions are in inches unless otherwise specified.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED)		 W132N10611 (Rev'd 1/16/22) Germantown, WI 53022 © 2025 TCI, LLC
				DECIMAL	.XX ± .25 .XXX ± .10	
G	6904, TB, Information Added.	1/22/25	DSW	FRACTIONAL	± 1/16	Inductor Drawing
F	6799, Match Revisions	9/16/2024	DSW	ANGULAR	± 1°	
NO	REVISION	DATE	BY	SCALE	1:1.2	109651DG
						SHT 1 OF 1