


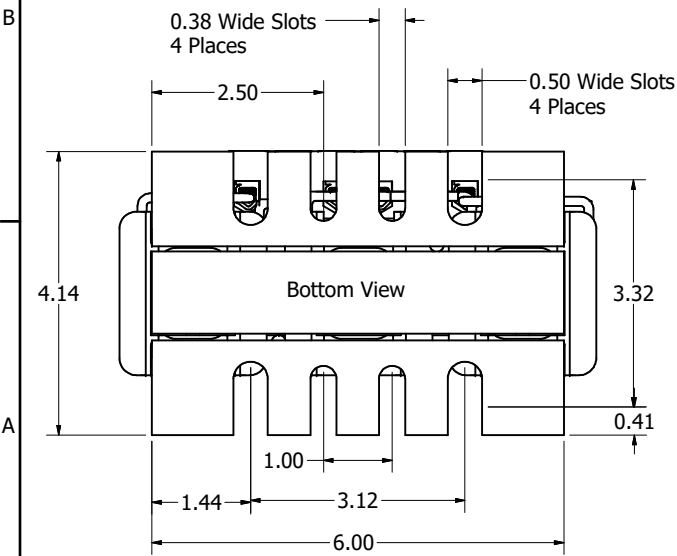
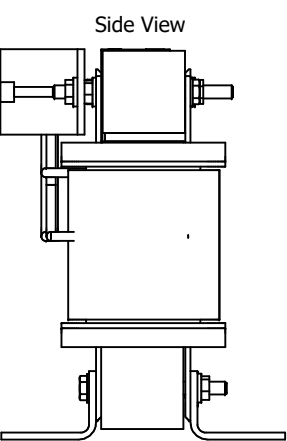


(Customer Connections)
Markings On Terminal Block
For Reference Only.


Wire Range: 4-18 AWG.
Torque : 20 IN-LBS (2.3 Nm)

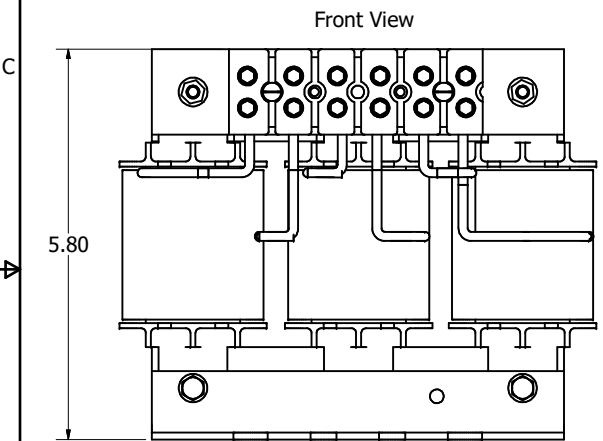

480 Rated Voltage, 600 Max Voltage, High Z, Impedance.					
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)
KDRC3H	20	27	27	1210	15

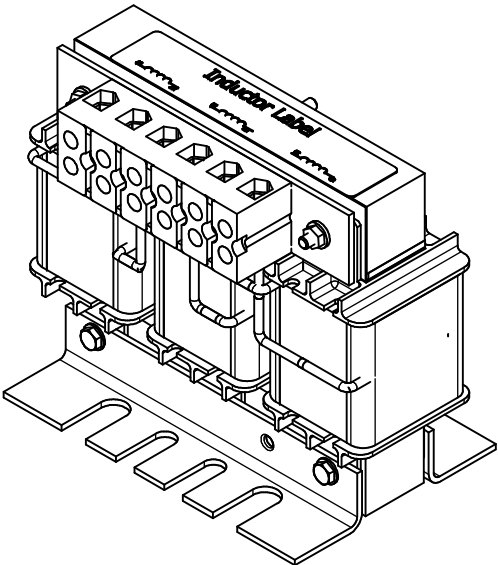

- Notes:
1. UL file number: cULus Listed File E116124.
 2. KDR Line Inductors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
 3. KDR IOM Manual Part Number 30895
 4. Material(s) Shall be RoHS Compliant
 5. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.
 6. Dimensions are in inches unless otherwise specified.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED)		 W132N10611 (Rev 19Feb) Germantown, WI 53022 © 2024 TCI, LLC
				DECIMAL	.XX ± .25 .XXX ± .10	
H	6904, TB, Information Added.	12/17/24	DSW	FRACTIONAL	± 1/16	Inductor Drawing
G	6799, Match Revisions	9/16/2024	DSW	ANGULAR	± 1°	
NO	REVISION	DATE	BY	SCALE	1:1.2	DATE 9/16/2024 DRAWN BY DSW CHECKED BY C