


CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX WT-LBS	TORQUE (LB-IN)
KDRD33PC2	575	30	32	NOTE:1	18	20

NOTE 1: WATTS LOSS WILL VARY DUE TO FUNDAMENTAL FREQUENCY,
CARRIER FREQUENCY AND OTHER SYSTEM CHARACTERISTICS.
KDR DRIVE REACTORS COMPLY WITH THE THERMAL AND
ALTITUDE STANDARDS SET FORTH BY NEMA ST20-1992..

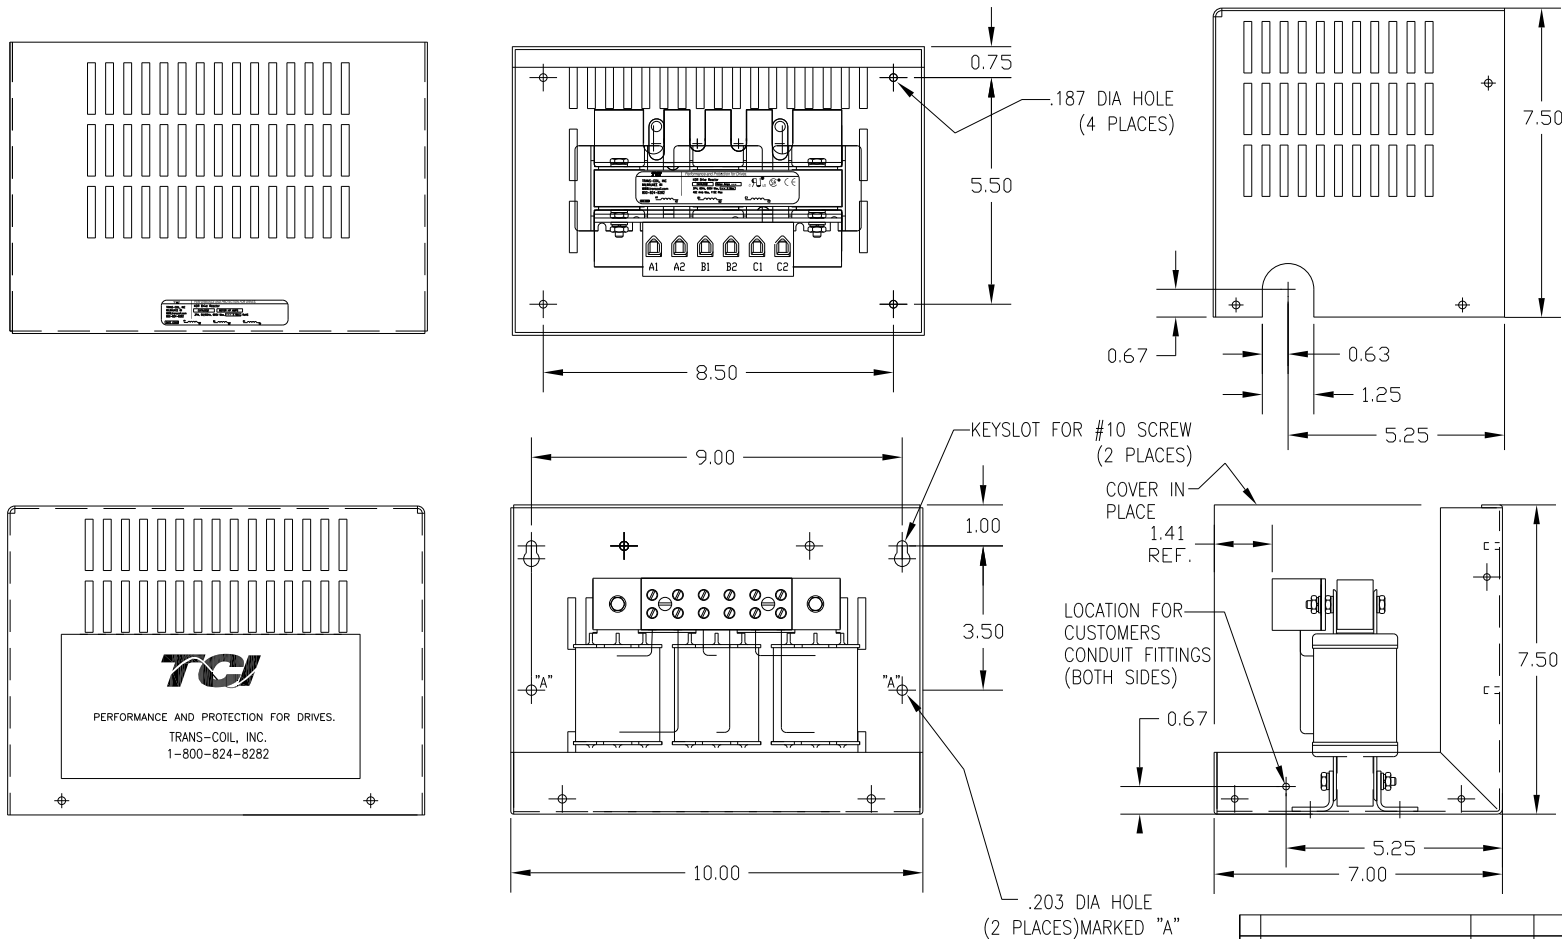

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

				TOLERANCES (EXCEPT AS NOTED)				7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL					
				.XX ± .03		KDR OUTPUT REACTOR			
				.XXX ± .01		575V, FRAME D			
				FRACTIONAL					
				± 1/32					
				ANGULAR		DRN BY DSW		DATE 1/25/12	
				± 1/2°		SCALE		APPROV. B	
NO		REVISION		DATE		BY		KDRD33PC2DG SHT. 1 OF 1	