


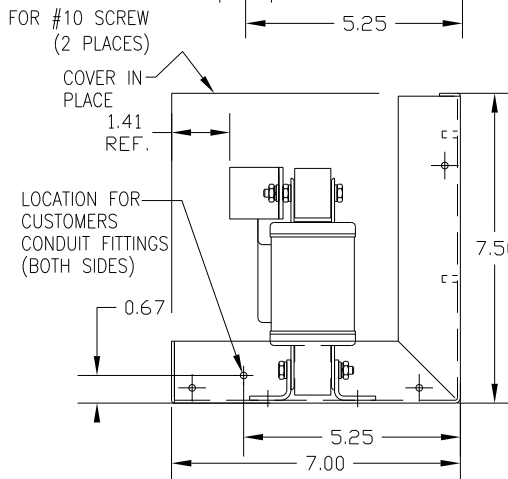
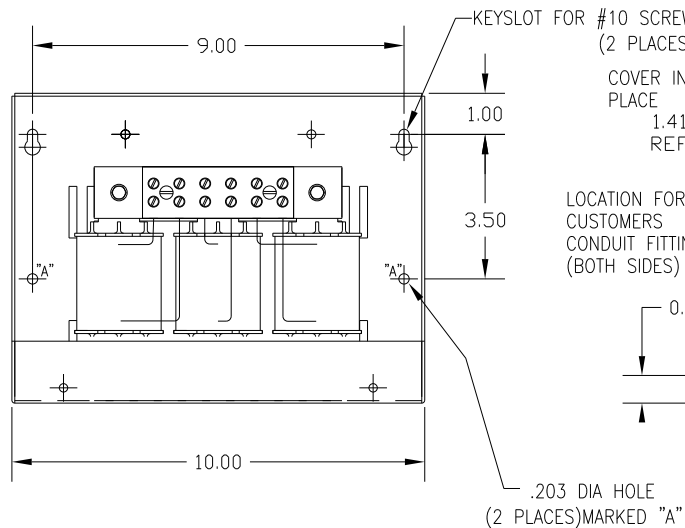
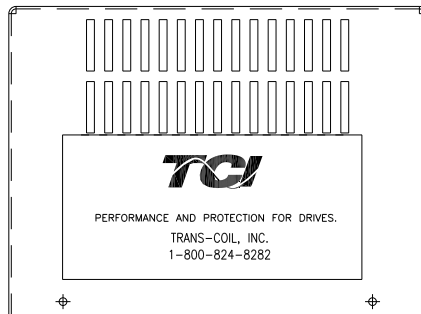
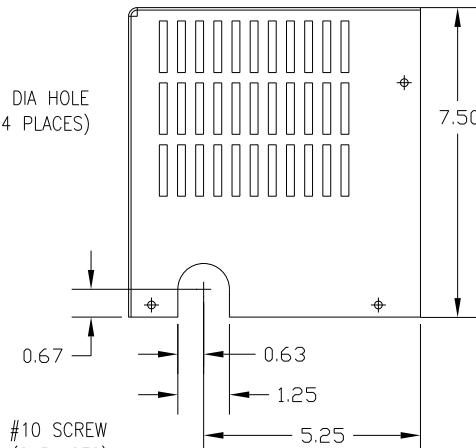


CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX WT-LBS	TORQUE (LB-IN)
KDRD35PC2	575	25	27	NOTE:1	16	20

NOTE 1: WATTS LOSS WILL VARY DUE TO FUNDAMENTAL FREQUENCY, CARRIER FREQUENCY AND OTHER SYSTEM CHARACTERISTICS.
KDR DRIVE REACTORS COMPLY WITH THE THERMAL AND ALTITUDE STANDARDS SET FORTH BY NEMA ST20-1992..

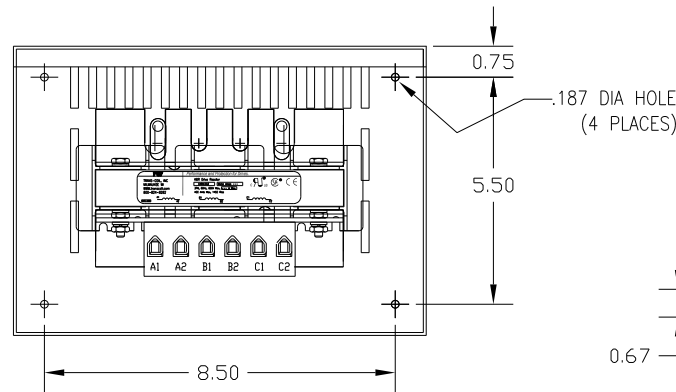

NOTE: A1, A2, B1, B2, C1, C2, MARKINGS ON TERMINAL BLOCK FOR REFERENCE ONLY.

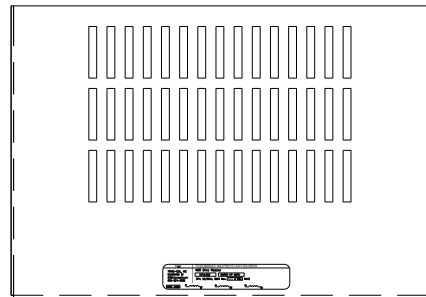

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

				TOLERANCES (EXCEPT AS NOTED)		7878 N. 86th STREET MILWAUKEE, WI 53224 KDR OUTPUT REACTOR 575V, FRAME D DRN BY DSW DATE 1/25/12 APPROV. B	
				DECIMAL			
				.XX ± .03			
				.XXX ± .01			
				FRACTIONAL			
				± 1/32			
				ANGULAR			
				± 1/2°			
NO	REVISION	DATE	BY	SCALE	APPROV.	KDRD35PC2DG	
						SHT. 1 OF 1	