



CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX WT-LBS	TORQUE (LB-IN)
KDRD3PC2	480	25	34	NOTE:1	18	20

NOTE 1: WATTS LOSS WILL VARY DUE TO FUNDAMENTAL FREQUENCY, CARRIER FREQUENCY AND OTHER SYSTEM CHARACTERISTICS.
KDR DRIVE REACTORS COMPLY WITH THE THERMAL AND ALTITUDE STANDARDS SET FORTH BY NEMA ST20-1992..

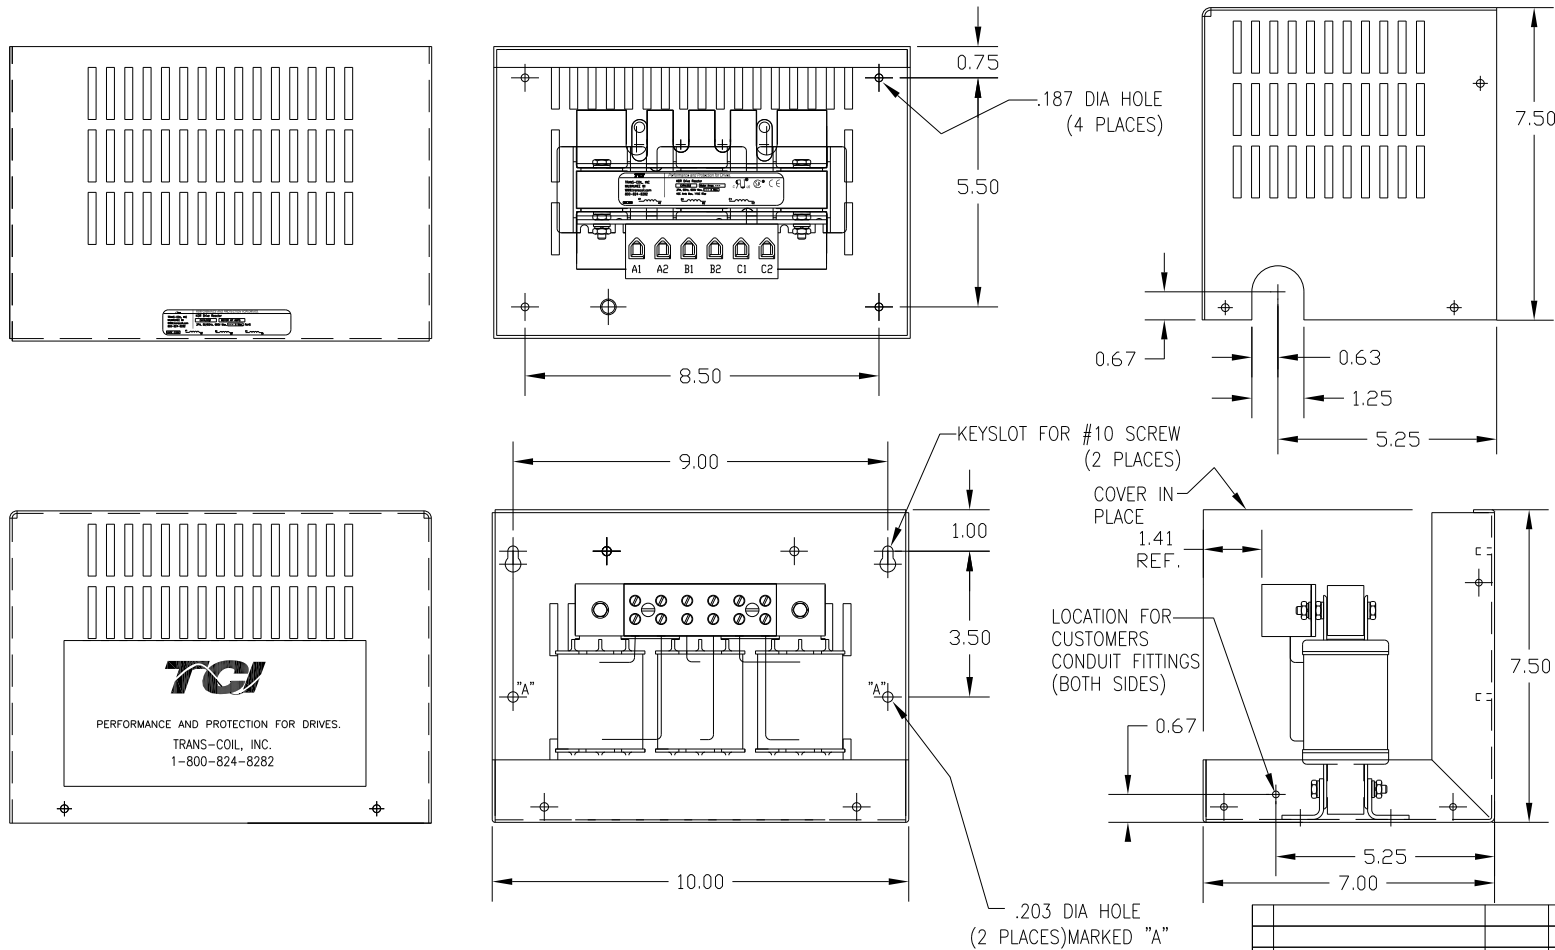

NOTE: A1, A2, B1, B2, C1, C2, MARKINGS ON TERMINAL BLOCK FOR REFERENCE ONLY.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

				TOLERANCES (EXCEPT AS NOTED):		 7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL			
				XX ± .03			
				XXX ± .01			
				FRACTIONAL		KDR OUTPUT REACTOR 480V, FRAME D	
				± 1/32			
				ANGULAR			
				± 1/2°			
NO	REVISION	DATE	BY	DRN BY	SCALE	DATE	DWG. NO.
				DSW		1/25/12	B KDRD3PC2DG
						APPROV	SHT. 1 OF 1