

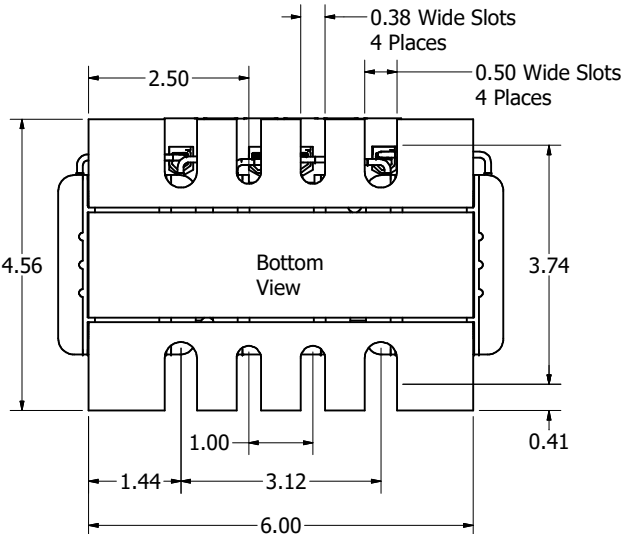
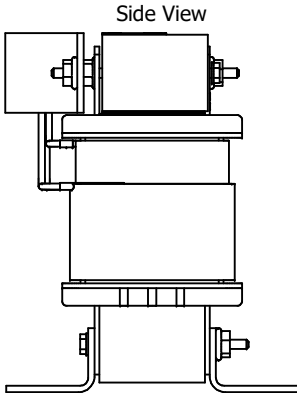


Wire Range: 4-18 AWG.
Torque : 20 IN-LBS (2.3 Nm)


(Customer Connections)
Markings On Terminal Block
For Reference Only.

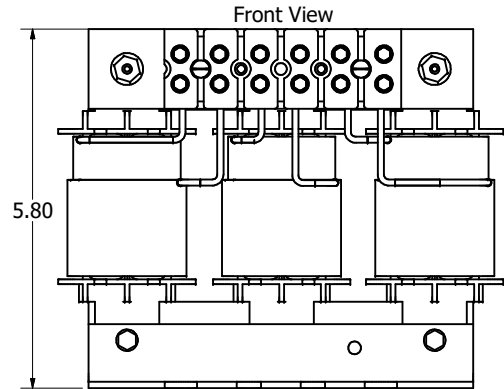

* For Single phase applications, use coils A and C
Isolate terminals B1 and B2.

480 Rated Voltage, 600 Max Voltage, High Z, Impedance.

Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)
KDRE2H	30	40	45	850	16

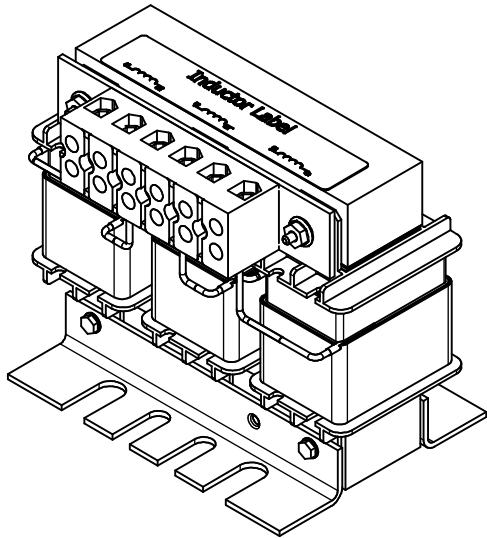

Notes:

1. UL file number: cULus Listed File E116124.
2. KDR Line Inductors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
3. KDR IOM Manual Part Number 30895
4. Material(s) Shall be RoHS Compliant
5. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.
6. Dimensions are in inches unless otherwise specified.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

NO	REVISION	DATE	BY
1	6904, TB, Information Added	12/17/2024	DSW
11	6799, Update Rev to Match	9/13/2024	DSW

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ± .25
.XXX ± .10
FRACTIONAL
± 1/32
ANGULAR
± 1°

TCI An Allied Motion Company	W132N10611 (Rev 13) 50922 © 2024 TCI, LLC
KDRE2H Inductor Drawing	109648DG
DRN BY: DSW SCALE: 1:1.5	DATE: DSW REV: C