


TCI Part Number	Rated Amps (A)	Max Amps (A)	---uH ±5%	Approx Weight (LBS)
KDRF2TT	19.3	27	4772	23

Terminal Block Connection	
Wire Range	Tightening Torque
1 Awg - 4 Awg	35 In-Lbs
6 Awg - 14 Awg	30 In-Lbs
16 Awg - 20 Awg	25 In-Lbs
22 Awg	20 In-Lbs

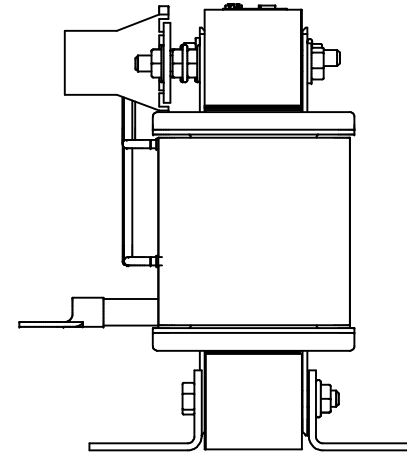

Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED)	
				DECIMAL	.XX ± .25 .XXX ± .10
C	6233, Add Double nut	4/10/2023	DSW	FRACTIONAL	± 1/32
B	5243, Remove 1" sleeve note	5/4/2020	DSW	ANGULAR	± 1°
A	Height Was 6.89	8/13/18	DSW		
NO	REVISION	DATE	BY		

TCI W132N10611 (Rev 1) 5/2022
 © 2023 TCI, LLC

An Allied Motion Company

KDRF2TT, KDR, HGP Inductor,
 480V, 20HP, 27 Max Amps

DWG BY: DSW DATE: 6/28/13
 SCALE: 1/2 DRAWN: HGC

105305DG

SHT 1 OF 1

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.