
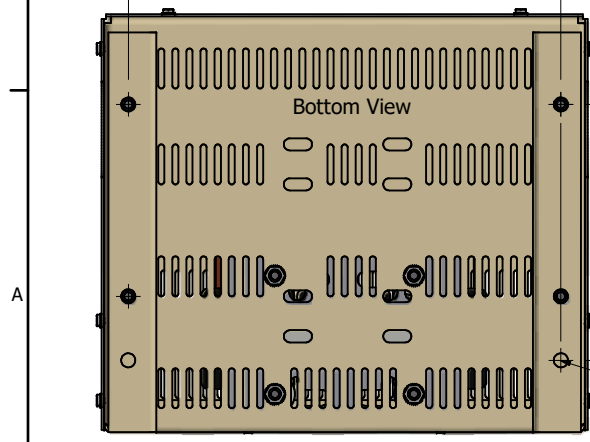
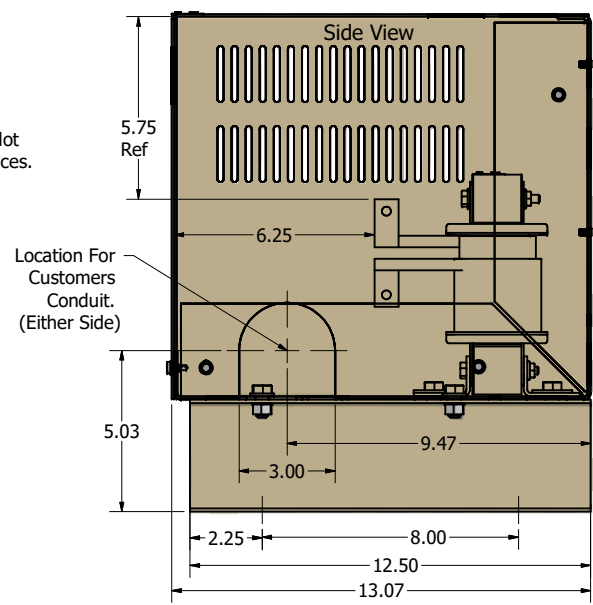
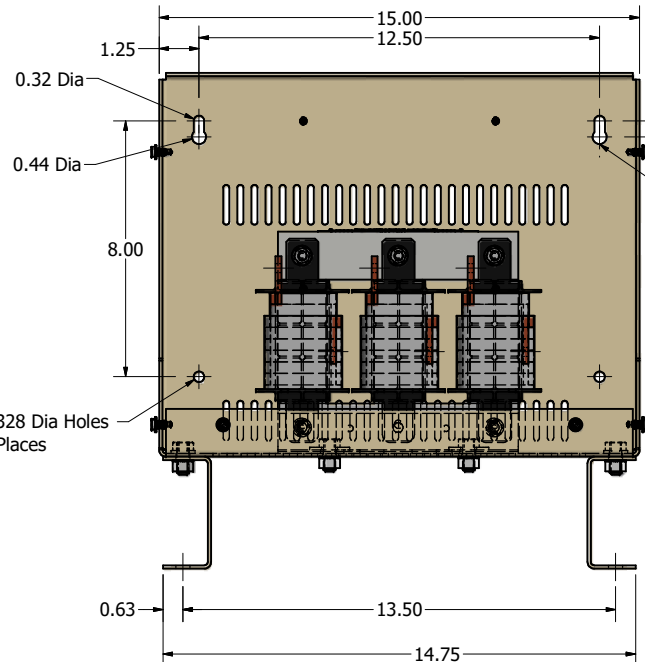


575 Rated Voltage, 600 Max Voltage, Output							
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)	Terminal Hole Size (Inches)	Losses (W)
KDRF33PC4V	100	99	110	104	65	0.28	95

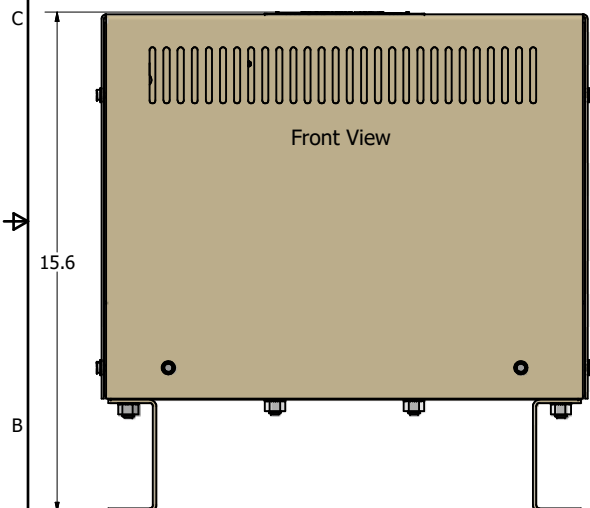


Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

TOLERANCES (EXCEPT AS NOTED)			
DECIMAL			
.XX	± .25		
.XXX	± .10		
FRACTIONAL			
	± 1/32		
ANGULAR			
	± 1°		


 W132N10611 (Frame 13F) © 2024 TCI, LLC
 An Allied Motion Company
 KDR (F Frame) Enclosed
 KDRF33PC4V
 DESIGNED BY: DSW DATE: 03/27/2007
 SCALE: 1/3 DRAWN BY: DSW
 103151DG
 SHEET 1 OF 1

NO	REVISION	DATE	BY
A	6639, Change to Flag Termination	4/19/2024	DSW