






CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX WT-LBS
KDRF47LC3	575/ 600	75	77	194	42

NEC MOTOR CURRENTS SHOWN IN THE 575/600 VOLT CHART ARE BASED ON HORSE POWERS AT 575 VOLT.

NOTE: TORQUE (LB-IN) = CUSTOMER WIRE SIZE
 35 = # 1 AWG THRU # 4 AWG
 30 = # 6 AWG THRU #14 AWG
 25 = #16 AWG THRU #20 AWG
 20 = #22 AWG



NOTE: A1, A2, B1, B2, C1, C2, MARKINGS ON TERMINAL BLOCK FOR REFERENCE ONLY.

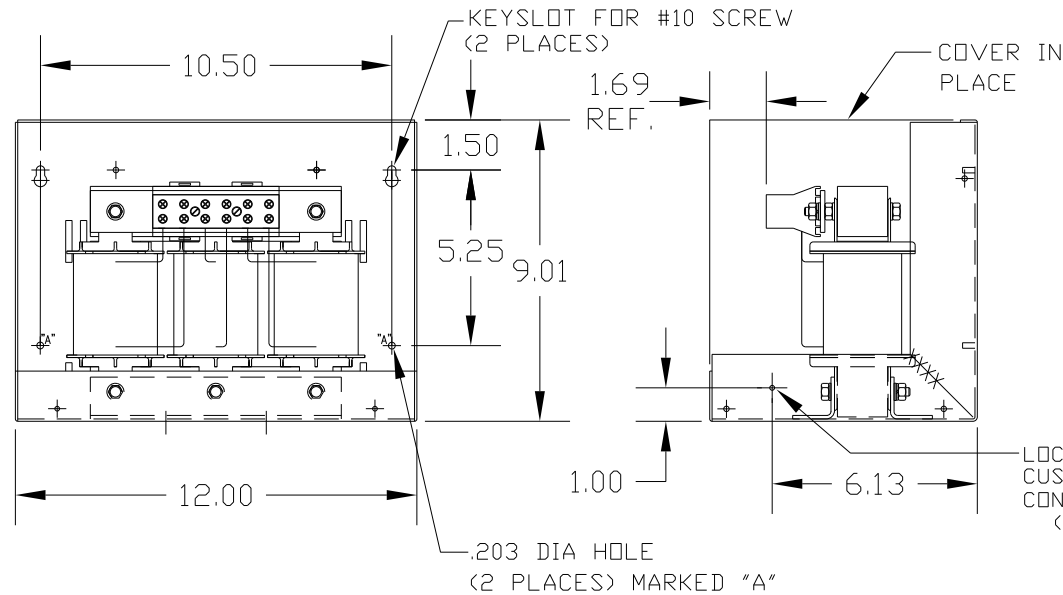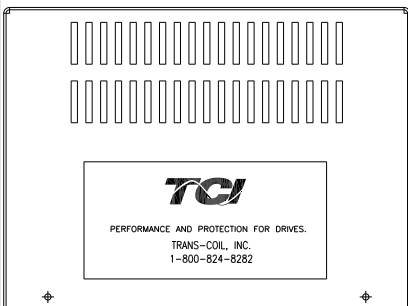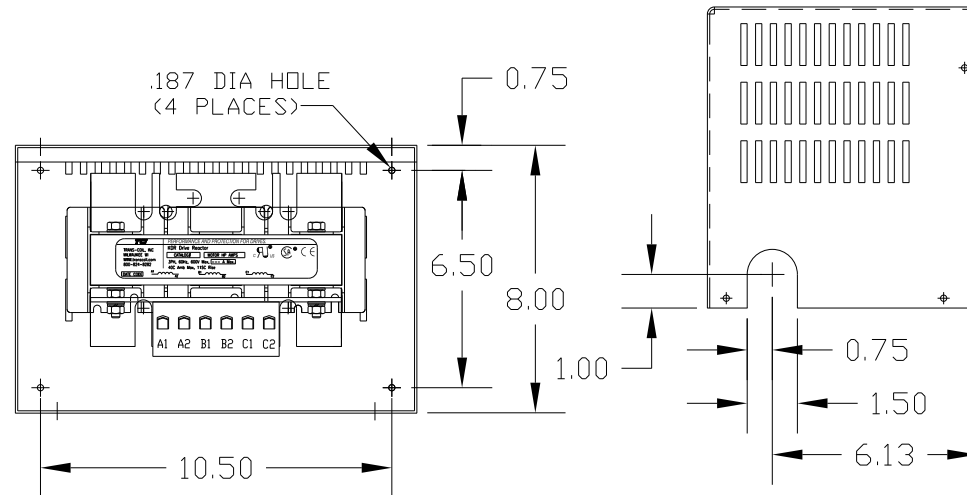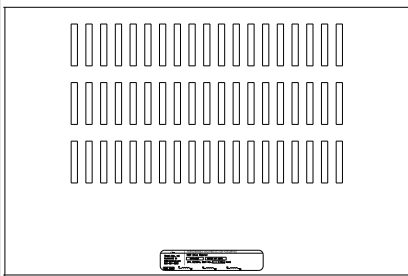

LOCATION FOR CUSTOMERS CONDUIT FITTING (BOTH SIDES)

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

					TOLERANCES (EXCEPT AS NOTED):	 7878 N. 86th STREET MILWAUKEE, WI 53224
					DECIMAL	
					.XX ± .03	KDR DRIVE REACTOR, ENCLOSED 600V LOW Z, FRAME F
					.XXX ± .01	
					FRACTIONAL	
					± 1/32	
					ANGULAR	
					± 1/2°	DRN. BY DSW DATE 02/27/2012 DRG. NO. B KDRF47LC3DG
NO	REVISION	DATE	BY		SCALE TO FIT	APPROV.  CUT 1 OF 1