480 Rated Voltage, 600 Max Voltage, Low Z, Impedance.

Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)	Losses (W)	Terminal Hole Size (Inches)
KDRG3HC4	125	156	160	209	87	290	0.28

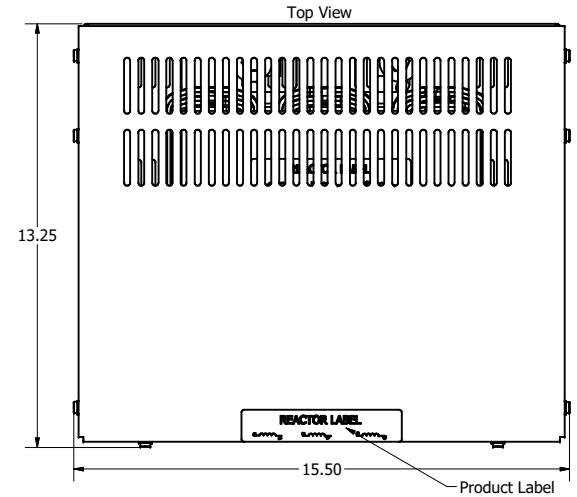

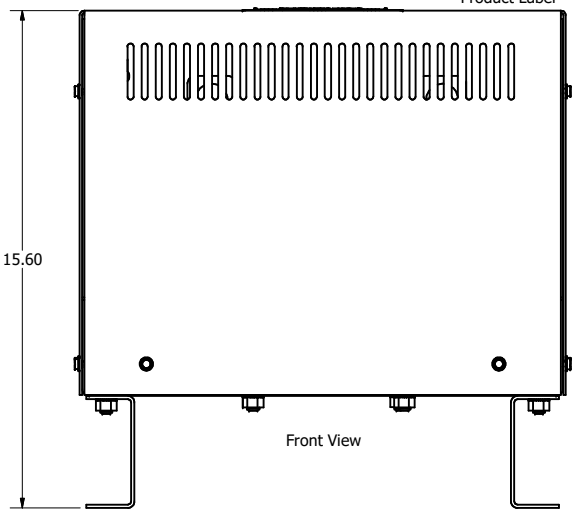

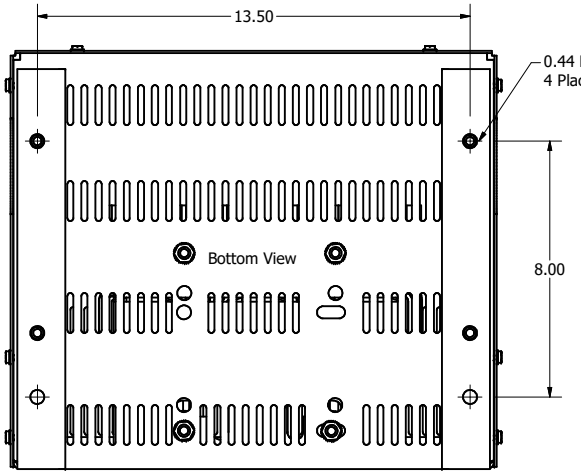



DETAIL A
SCALE 2 / 3

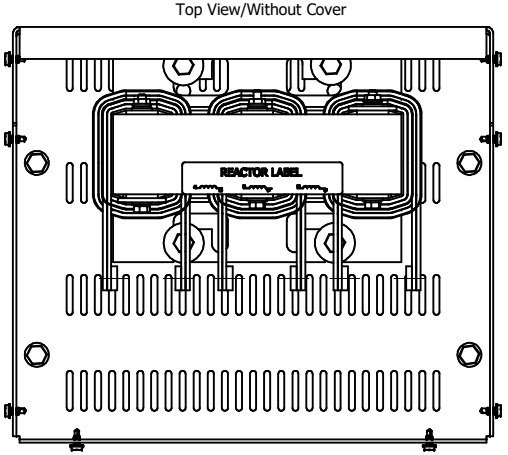

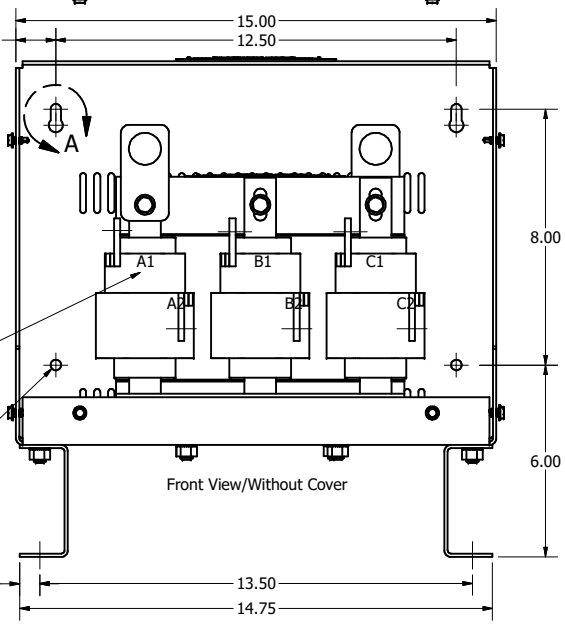

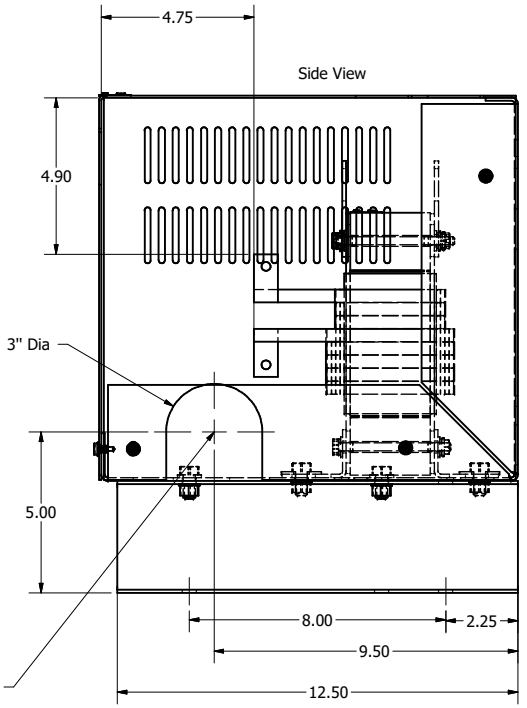



Notes:
1. Material(s) Shall be RoHS Compliant
2. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

NO	REVISION	DATE	BY
D	6677, Update Flag To 32766	5/21/2024	DSW
C	6400 Update Inductor Termination	9/1/2023	DSW

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ± .25
.XXX ± .10
FRACTIONAL
± 1/32
ANGULAR
± 1°

TCI
An Allied Motion Company
W132N10611 Grant Drive
Germantown, WI 53022
© 2023 TCI, LLC

KDR G Frame
Enclosure Nema 1, UL Recognized

DRN. BY: RJC
DATE: 5/29/01
KDR-11DG
SCALE: 1/3
APRVD:
SIZE: C
SHT 1 OF 1