
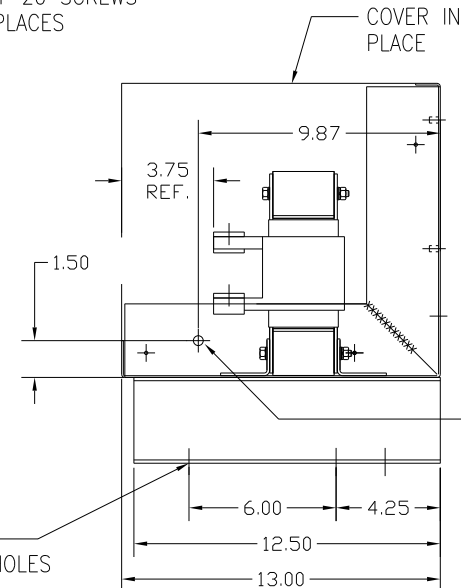
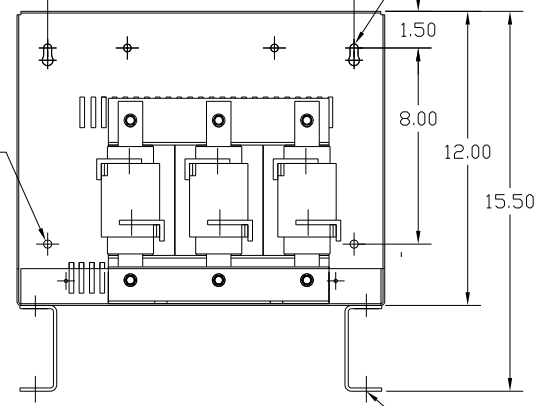
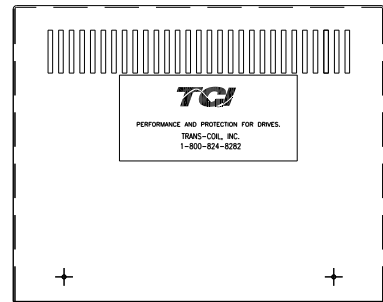
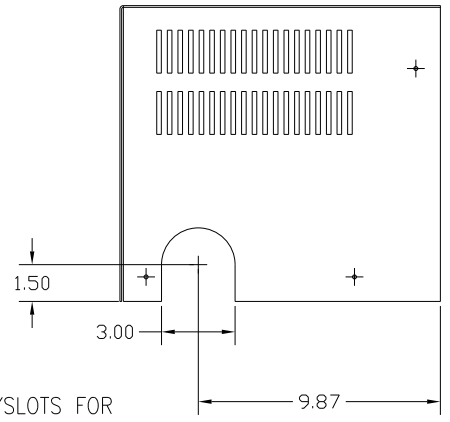
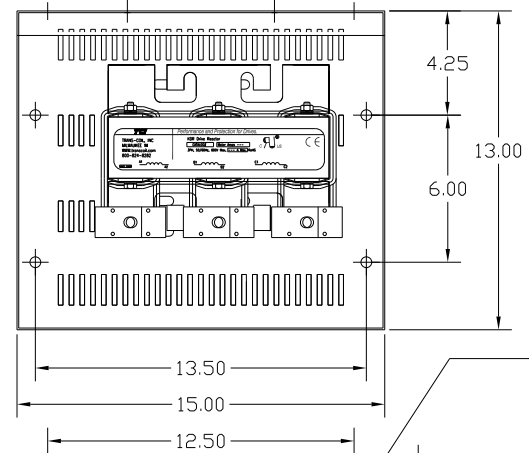


CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	TERMINAL HOLE SIZE	APPROX WT-LBS
KDRG45HC4V	690	150	144	406	.44	100

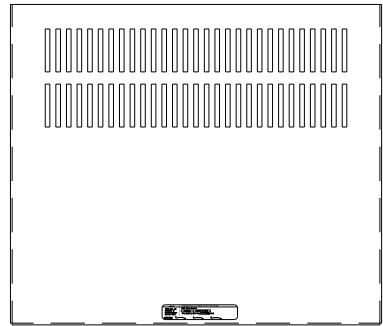

.328 DIA.  
2 HOLES

KEYSLOTS FOR  
1/4-20 SCREWS  
2 PLACES

COVER IN  
PLACE

LOCATION FOR  
CUSTOMERS  
CONDUIT FITTING  
(BOTH SIDES)

.44 DIA.  
4 MTG. HOLES

CUSTOMER IS RESPONSIBLE FOR INSTALLATION  
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NO	REVISION	DATE	BY	TOLERANCES (EXCEPT AS NOTED)	DRN. BY	DATE	APRVD.	DWG. NO.	SCALE
				DECIMAL .XX ± .03 .XXX ± .01	DSW	2/17/12		B	
				FRACTIONAL ± 1/32					
				ANGULAR ± 1/2°					
									7878 N. 86th STREET MILWAUKEE, WI 53224
									KDR DRIVE REACTOR, ENCLOSED 690V HIGH Z, FRAME G
									KDRG45HC4VDG SHT. 1 OF 1