

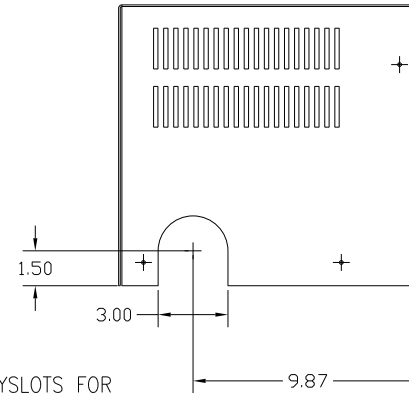
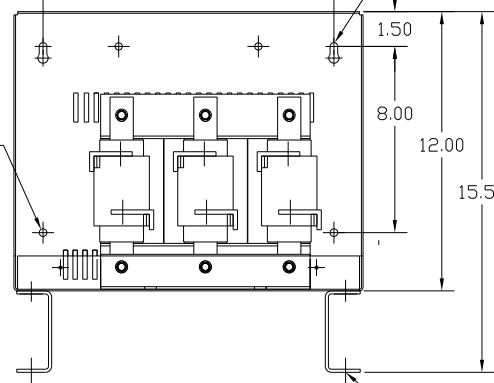
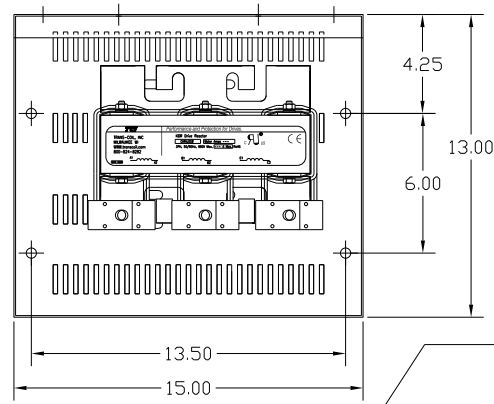
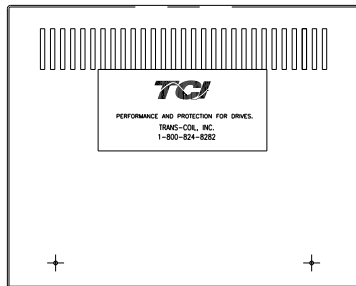


CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	TERMINAL HOLE SIZE	APPROX WT-LBS
KDRG45LC4V	690	300	289	374	.44	100

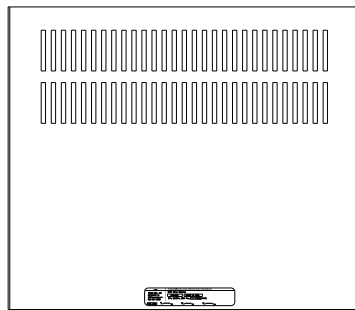

KEYSLOTS FOR 1/4-20 SCREWS 2 PLACES

COVER IN PLACE

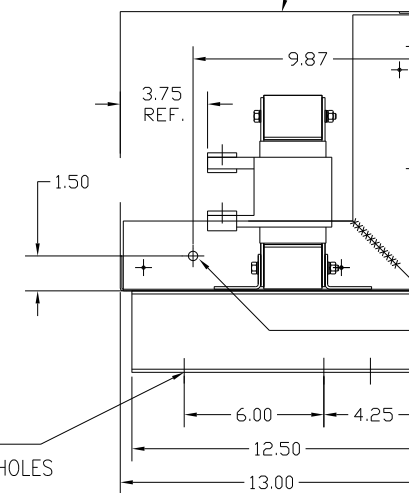

LOCATION FOR CUSTOMERS CONDUIT FITTING (BOTH SIDES)

.328 DIA. 2 HOLES

.44 DIA. 4 MTG. HOLES

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NO	REVISION	DATE	BY	TOLERANCES (EXCEPT AS NOTED)	DECIMAL	FRACTIONAL	ANGULAR	DWG. NO.	SCALE	DATE	APRVD.	DWG. NO.
					.XX ± .03	.XXX ± .01	± 1/32	± 1/2°		2/16/12		B

TCI 7878 N. 86th STREET MILWAUKEE, WI 53224

KDR DRIVE REACTOR, ENCLOSED 690V LOW Z, FRAME G

DRAWN BY: DSW DATE: 2/16/12 DWG. NO.: KDRG45LC4V SHT. 1 of 1