

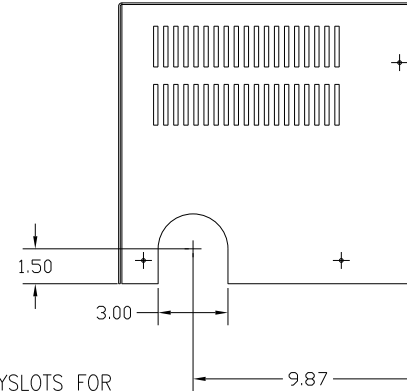
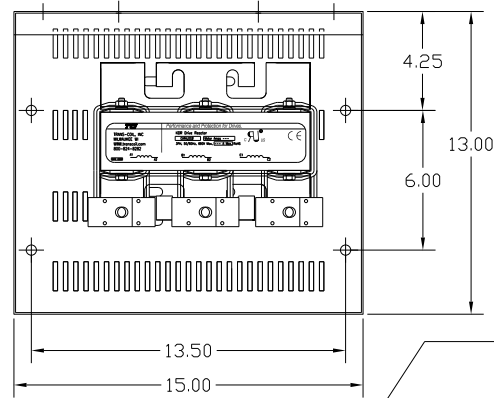


CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	TERMINAL HOLE SIZE	APPROX WT-LBS
KDRG47LC4V	690	250	242	394	.44	100

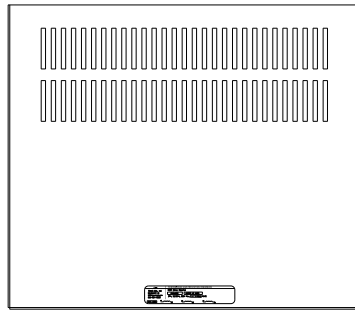


KEYSLOTS FOR 1/4-20 SCREWS 2 PLACES


COVER IN PLACE

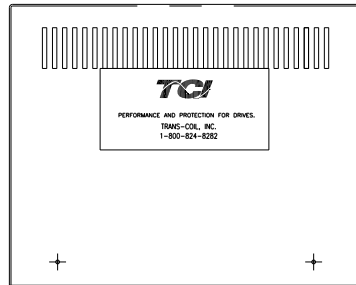

.328 DIA. 2 HOLES

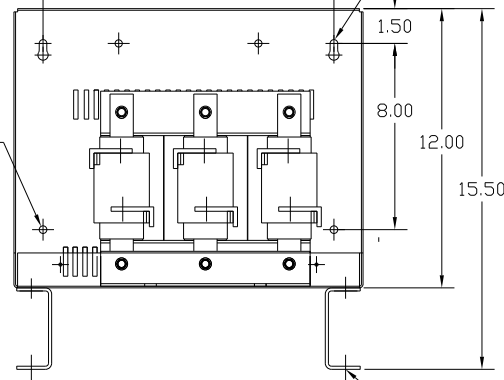

.44 DIA. 4 MTG. HOLES

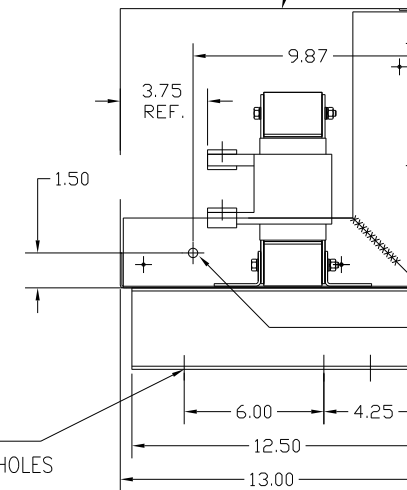

LOCATION FOR CUSTOMERS CONDUIT FITTING (BOTH SIDES)

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NO	REVISION	DATE	BY	TOLERANCES (EXCEPT AS NOTED)	DECIMAL	FRACTIONAL	ANGULAR	DWG. NO.	SCALE	DATE	APRVD.	DWG. NO.
					.XX ± .03	.XXX ± .01	± 1/32			2/16/12		B
							± 1/2°					

TCI 7878 N. 86th STREET
MILWAUKEE, WI 53224

KDR DRIVE REACTOR, ENCLOSED
690V LOW Z, FRAME G

DWG. NO. **KDRG47LC4V**

SHT. 1 of 1