


LABEL PLACED ON INSIDE WALL OF CABINET.

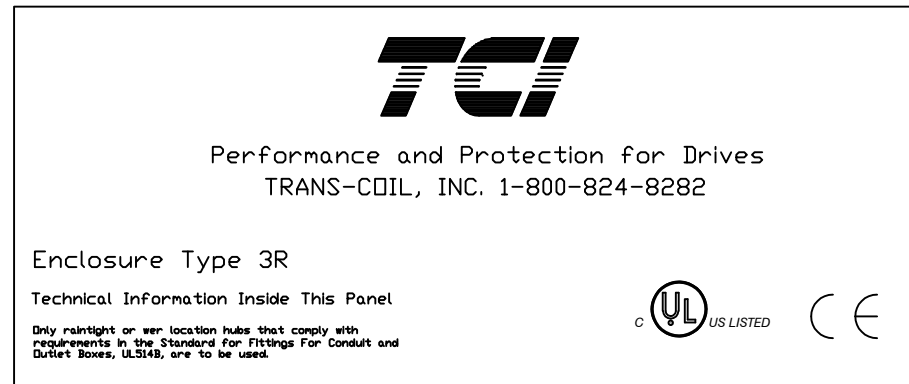

LABEL PLACED ON FRONT OF CABINET.




CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS
KDRULG3LE3R	480	200	240	280	144
KDRULG1PE3R	480	200	240	NOTE 1:	140
KDRULG31PE3R	575	250	242	NOTE 1:	140
KDRULG47LE3R	575/600	250	242	394	144
KDRULG45LE3R	575/600	300	289	374	144

NOTE 1: WATTS LOSS WILL VARY DUE TO FUNDAMENTAL FREQUENCY, CARRIER FREQUENCY AND OTHER SYSTEM CHARACTERISTICS.

KDR DRIVE REACTORS COMPLY WITH THE THERMAL AND ALTITUDE STANDARDS SET FORTH BY NEMA ST20-1992..

NEC MOTOR CURRENTS SHOWN IN THE 208/240 VOLT CHART ARE BASED ON HORSEPOWER AT 208 VOLT. 575/600 VOLT CHART USE THE 575 VOLT CURRENT RATING.

LUG WIRE RANGE FOR REACTOR.	ONE 600MCM-4 TWO 250MCM-1/0, AL. OR CU.
TIGHTENING TORQUE.	500 LB-IN

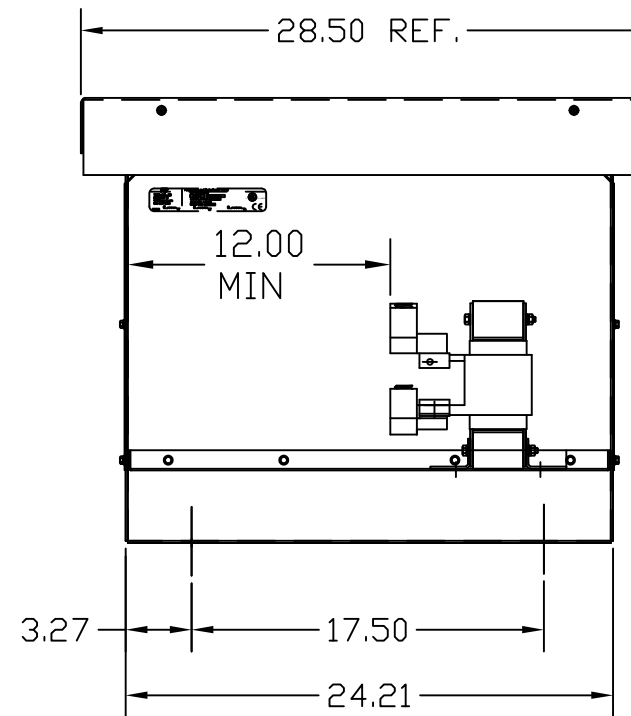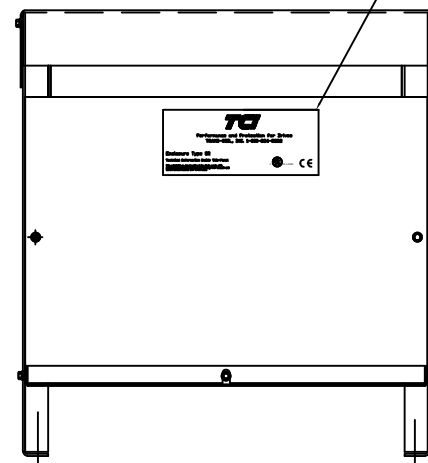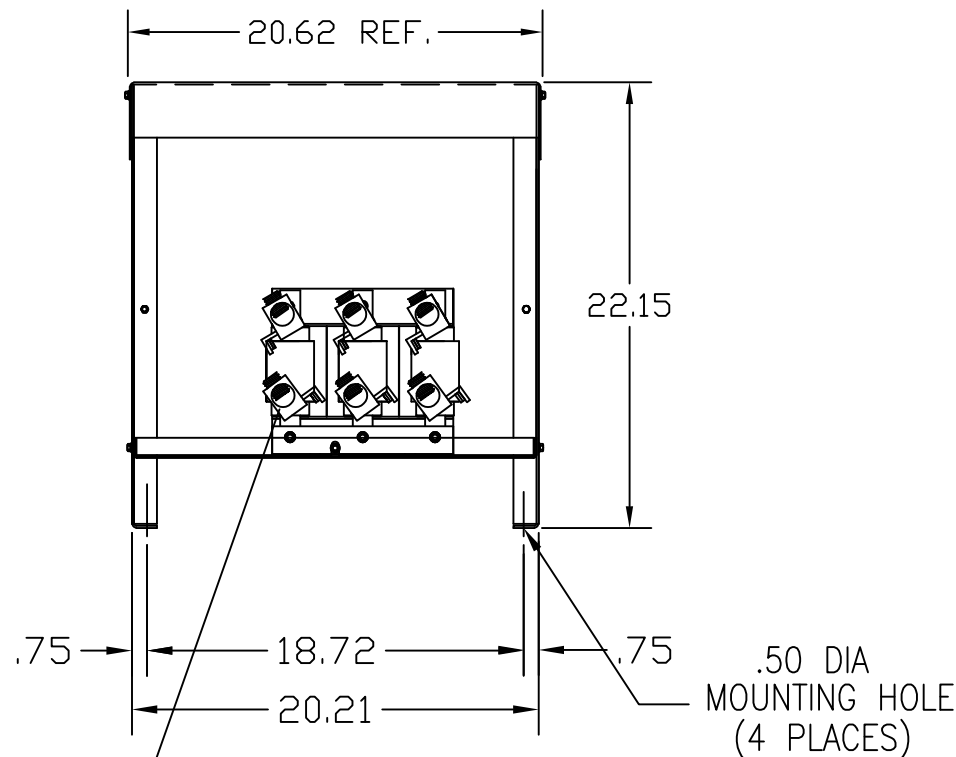

VENDOR LILLY POWDER COATINGS, INC.  
 PRODUCT CODE 312E  
 COLOR PEBBLE GRAY  
 POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

NOTE: ROTATE AS NEEDED TO MEET CLEARANCE BETWEEN TERMINAL OR LUGS (PHASE TO PHASE), AND LUGS TO GROUNDING SURFACE.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL LOCAL AND NATIONAL CODES

NO	REVISION	DATE	BY

**TCL**® W132 N10611 Grant Drive  
 Germantown, WI 53022

KDR FRAME G (ILSCO LUGS)  
 TYPE 3R ENCLOSURE

DRN. BY DSW DATE 09/20/04 DWG. NO. BKDRGE3R-1DG  
 SCALE TO FIT APRVD. B SHT.1 OF1