
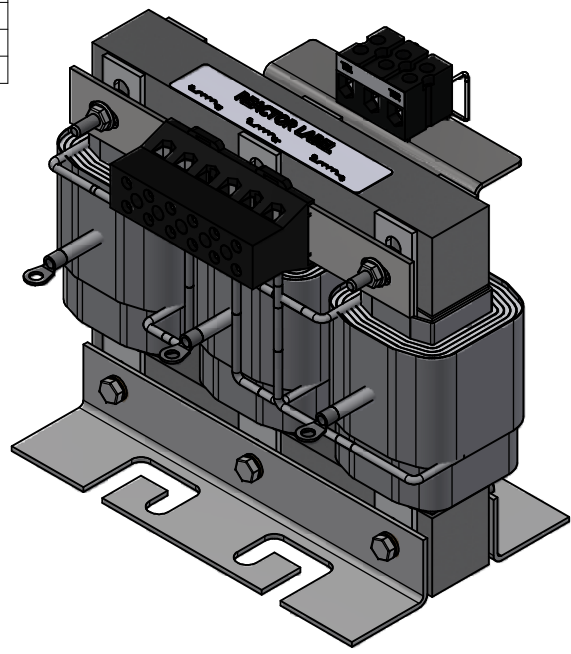


Terminal Block Connection	
Wire Range	Tightening Torque
1 Awg Thru 4 Awg	35 In-Lbs
6 Awg Thru 14 Awg	30 In-Lbs
16 Awg Thru 20 Awg	25 In-Lbs
22 Awg	20 In-Lbs

Reactor Part Number	HP	Max Amps (A)	uH +/- 5%	Weight (LBS)
KDRH1FE	10	15	19500	38

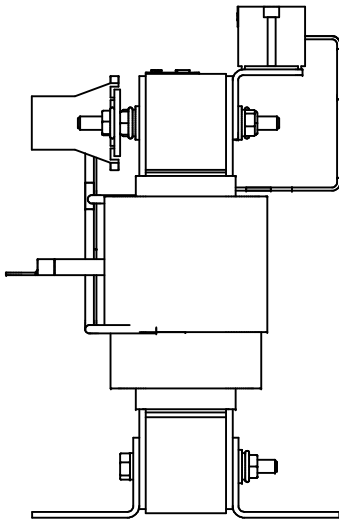

Thermal Switch
Terminal Block
TS1 TS2

Wire Range: 18 AWG To 4 AWG.
Torque: 20 LB-IN (2.3 Nm)
Switch Opens on Temperature Rise
Contact Rating: 6A @ 120 VAC

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

NO	REVISION	DATE	BY
A	As Designed	4/3/2023	DSW

TOLERANCES (EXCEPT AS NOTED)

DECIMAL	.XX ± .25
	.XXX ± .10
FRACTIONAL	± 1/32
ANGULAR	± 1°

Material(s) Shall be RoHS Compliant

TCL W132N10611 (Rev 13 Feb 2022)
Germanstown, WI 53022
© 2023 TCL, LLC

KDRH1FE, HSE, 10HP

OWN BY: DSW	DATE: 4/3/2023	109405DG
SCALE:	DRW:	REV: C

SHT 1 OF 1