

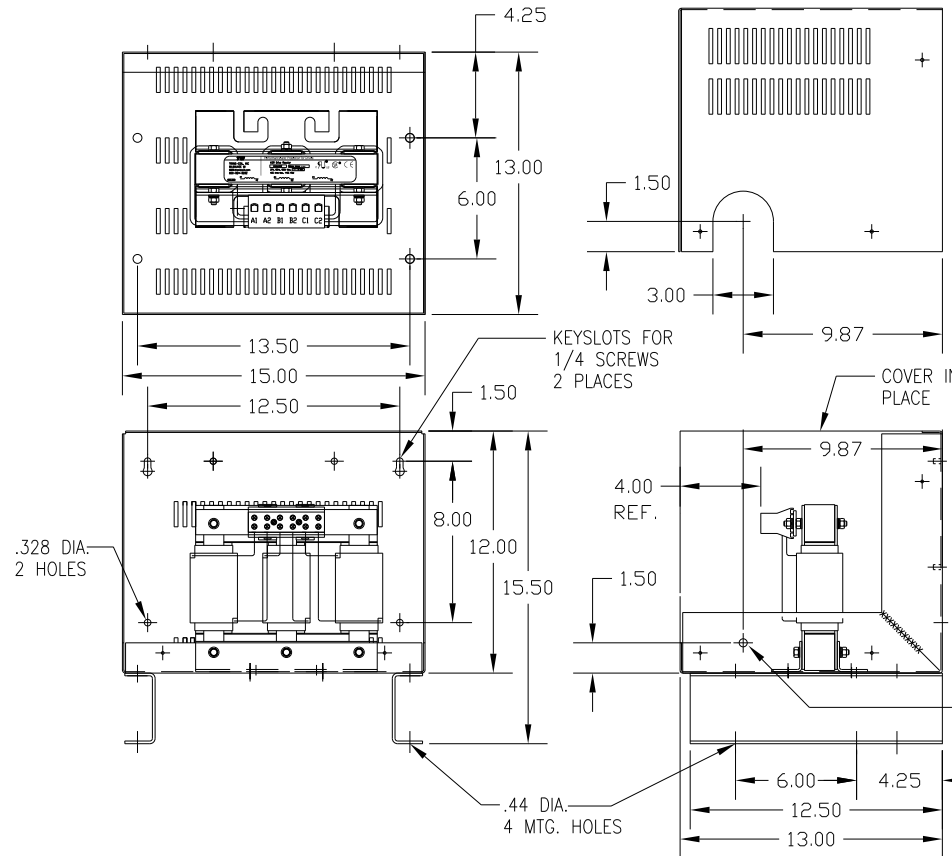



CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX WT-LBS
KDRH43HC4	575/600	60	62	205	85

NEC MOTOR CURRENTS SHOWN IN THE 575/600 VOLT CHART
ARE BASED ON HORSE POWERS AT 575 VOLT.



NOTE: A1, A2, B1, B2, C1, C2,
MARKINGS ON TERMINAL BLOCK
FOR REFERENCE ONLY.

TERMINAL BLOCK TORQUE(LB-IN)=CUSTOMER WIRE
35 = 1 AWG THRU 4 AWG
30 = 6 AWG THRU 14 AWG
25 = 16 AWG THRU 20 AWG
20 = 22 AWG

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NO	REVISION	DATE	BY	TOLERANCES (EXCEPT AS NOTED)	 8787 N. 86th STREET MILWAUKEE, WI 53224
				DECIMAL	
				.XX ± .03 .XXX ± .01	
				FRACTIONAL ± 1/32	
NO	REVISION	DATE	BY	ANGULAR ± 1/2°	KDR DRIVE REACTOR, ENCLOSED 600V HIGH Z, FRAME H DRN. BY DSW SCALE TO FIT DATE 02/13/12 APPRD. DWG. NO. B KDRH43HC4DG SHT. 1 OF 1