

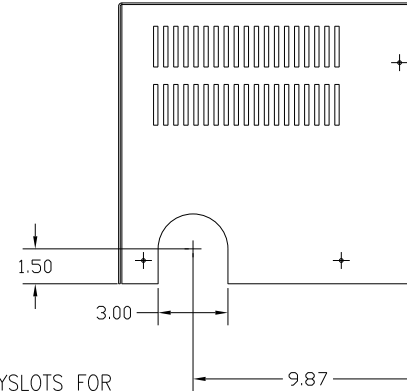
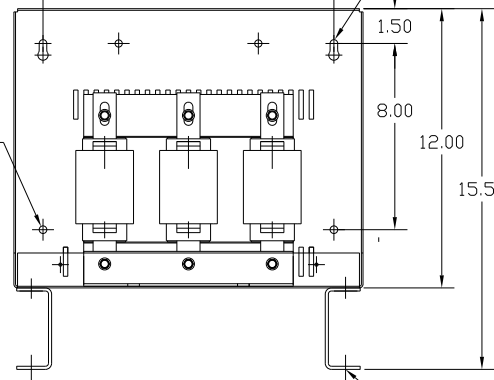
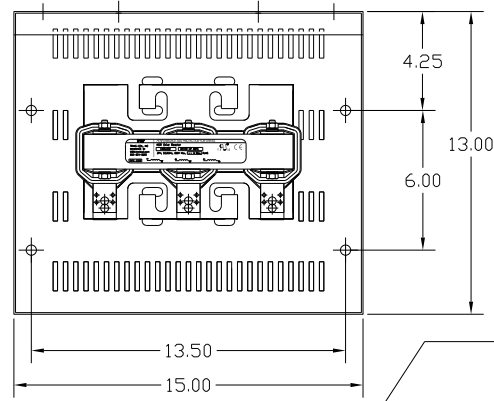
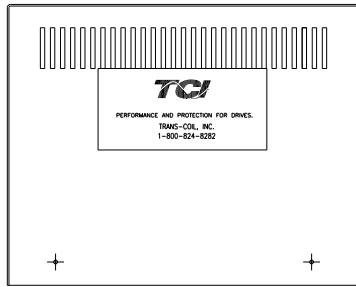


CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	TERMINAL HOLE SIZE	APPROX WT-LBS
KDRH43LC4V	690	125	125	261	.280	80

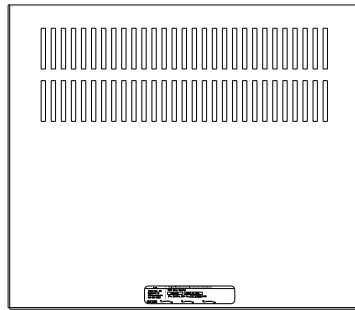

KEYSLOTS FOR 1/4-20 SCREWS 2 PLACES

COVER IN PLACE

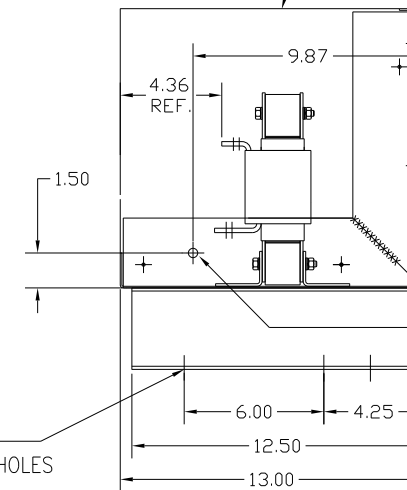

LOCATION FOR CUSTOMERS CONDUIT FITTING (BOTH SIDES)

.44 DIA. 4 MTG. HOLES

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

TOLERANCES (EXCEPT AS NOTED)				TCI 7878 N. 86th STREET MILWAUKEE, WI 53224	
DECIMAL	.XX ± .03	KDR DRIVE REACTOR, ENCLOSED 690V LOW Z, FRAME H			
FRACTIONAL	.XXX ± .01				
ANGULAR	± 1/32				
NO	REVISION	DATE	BY	SCALE	DWG. NO. B KDRH43LC4V SHT. 1 of 1