


600 Rated Voltage, 600 Max Voltage, High Z, Impedance.						
Part Number	Horsepower (HP)	Amps (A)	--uH +/-20%	Losses (W)	Weight (LBS)	Terminal Hole Size (Inches)
KDRJ1T	100	124	593	458	75	0.28

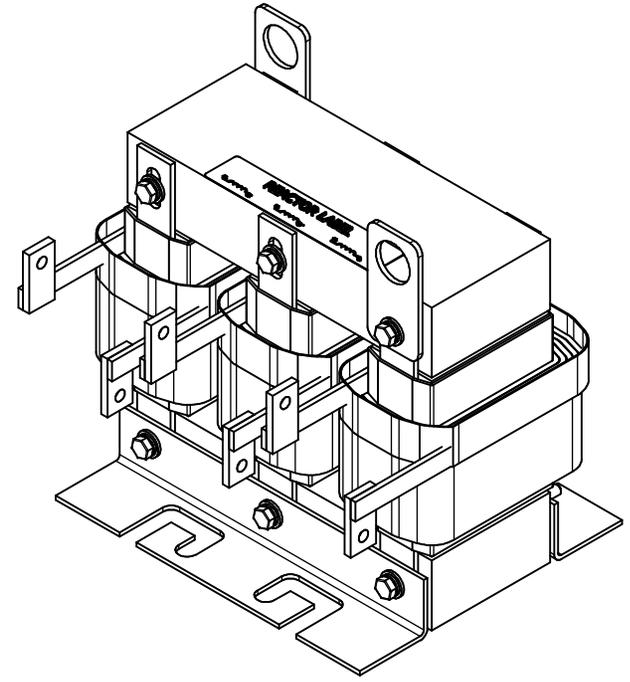

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED)	W132N10611 (Rev 11/20) Germantown, WI 53022 © 2024 TCI, LLC	
				DECIMAL .XX ± .25 .XXX ± .10		
	B	6590, Bus Bar to Flag 32766	2/27/2024	DSW	FRACTIONAL ± 1/32	An Allied Motion Company KDR (J Frame) Reactor Drawing DWN BY: DSW DATE: 02/02/2024 SCALE: 1/2 DRAWN BY: TCI
	A	4302-HW++ Change	02/26/2018	JRN	ANGULAR ± 1°	
NO	REVISION	DATE	BY		102428DG SHEET 1 OF 1	