


.328 DIA.
2 HOLES

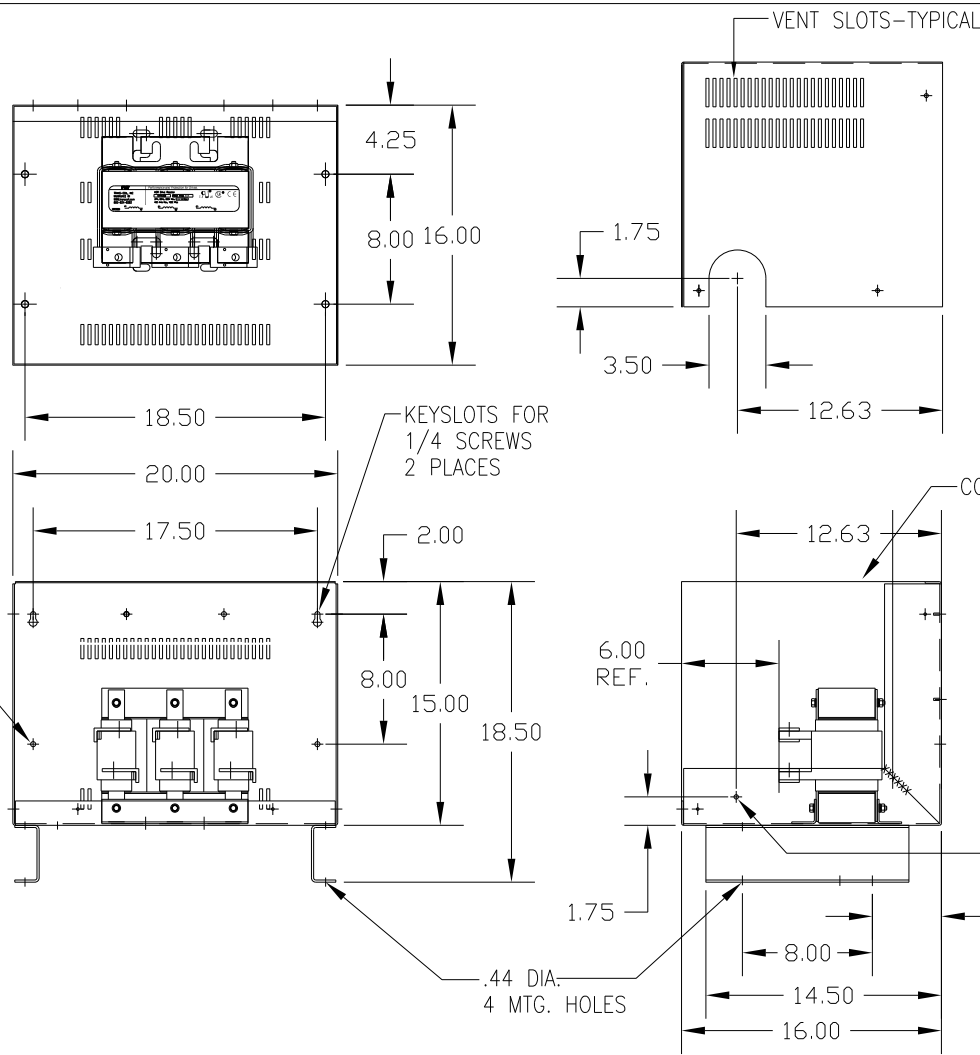

CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS	TERMINAL HOLE SIZE
KDRJ45LC5	575/600	350	336	474	120	.56 DIA

NEC MOTOR CURRENTS SHOWN IN THE 575/600 VOLT CHART ARE BASED ON HORSE POWERS AT 575 VOLT.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NO	REVISION	DATE	BY	TOLERANCES (EXCEPT AS NOTED): DECIMAL .XX ± .03 .XXX ± .01 FRACTIONAL ± 1/32 ANGULAR ± 1/2°	7878 N. 86th STREET MILWAUKEE, WI 53224
					KDR DRIVE REACTOR, ENCLOSED 600V LOW Z, FRAME J
				DRN. BY DSW SCALE TO FIT	DATE 02/27/2012 APRVD. B
					DWG. NO. KDRJ45LC5DG SHT. 1 of 1