
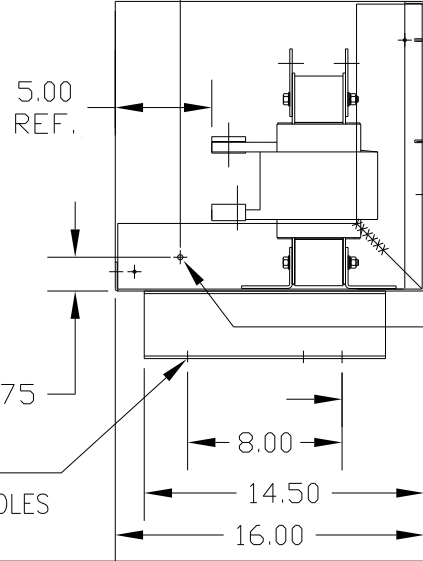
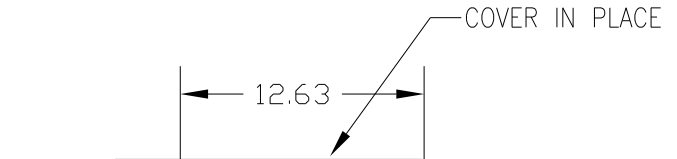
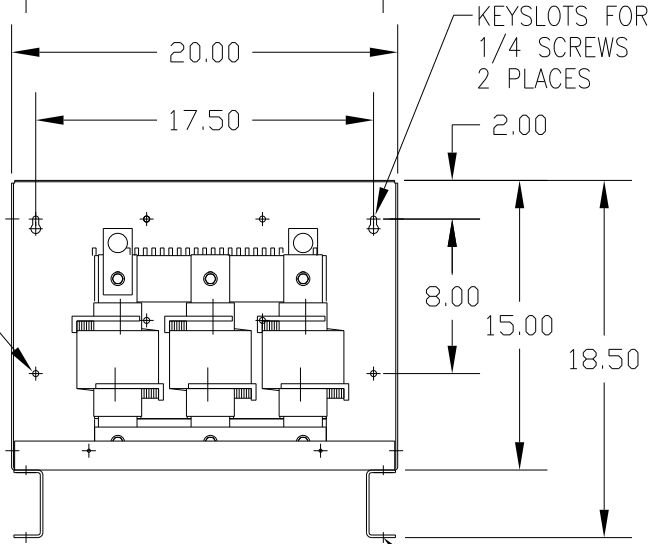
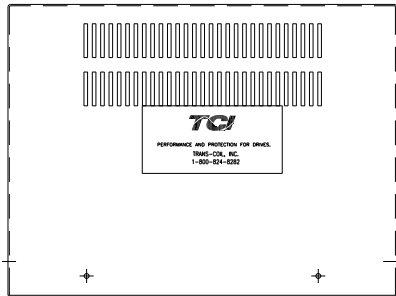
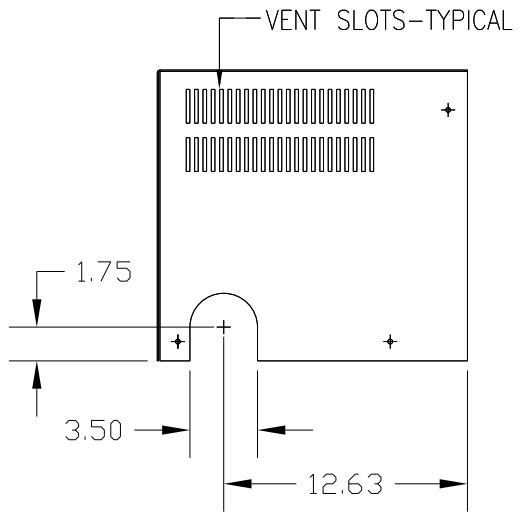
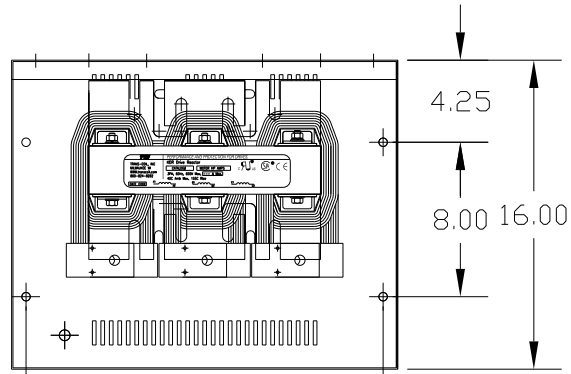


CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS	TERMINAL HOLE SIZE
KDRL2HC5	480	300	361	750	145	.56

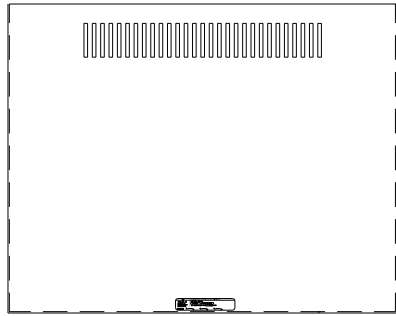

LOCATION FOR CUSTOMERS CONDUIT FITTING (BOTH SIDES)

.328 DIA. 2 HOLES

.44 DIA. 4 MTG. HOLES

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

TOLERANCES (EXCEPT AS NOTED)				TCI 7878 N. 86th STREET MILWAUKEE, WI 53224	
			DECIMAL	KDR DRIVE REACTOR 480V HIGH Z, FRAME L	
			.XX ± .03		
			.XXX ± .01		
			FRACTIONAL ± 1/32		
			ANGULAR ± 1/2°	DRN BY DSW	DATE 1/26/12
NO	REVISION	DATE	BY	SCALE	APRVD. B
					DWG. NO. KDRL2HC5DG
					SHT. 1 OF 1