
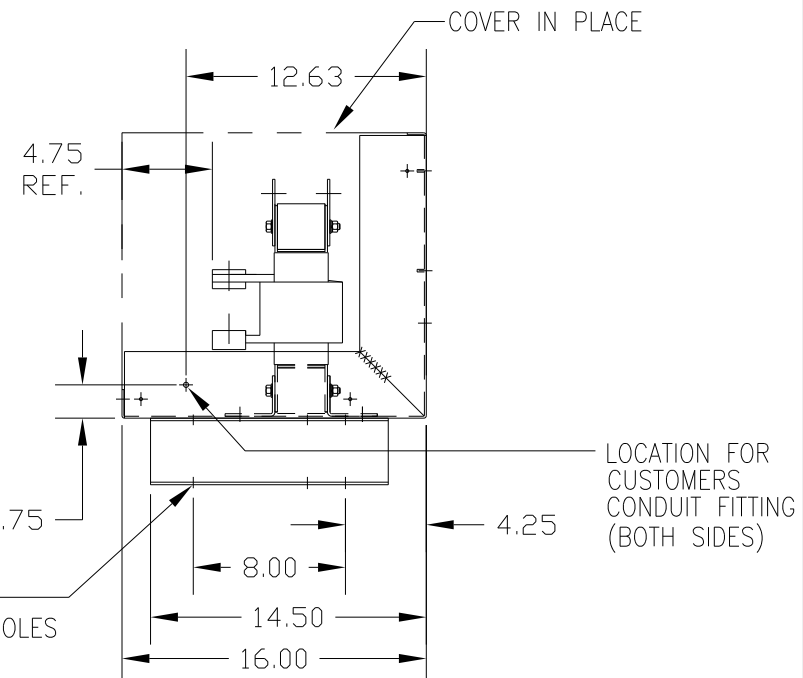
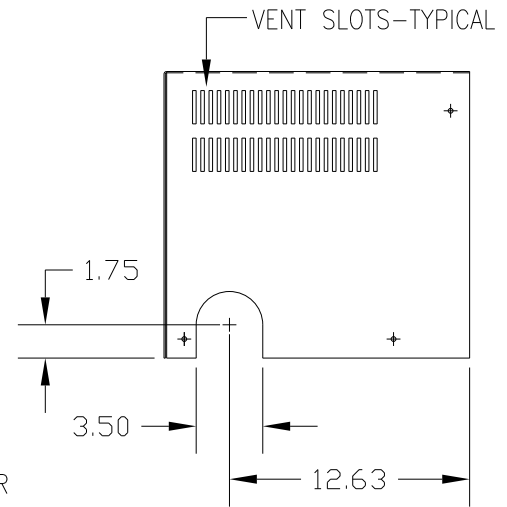
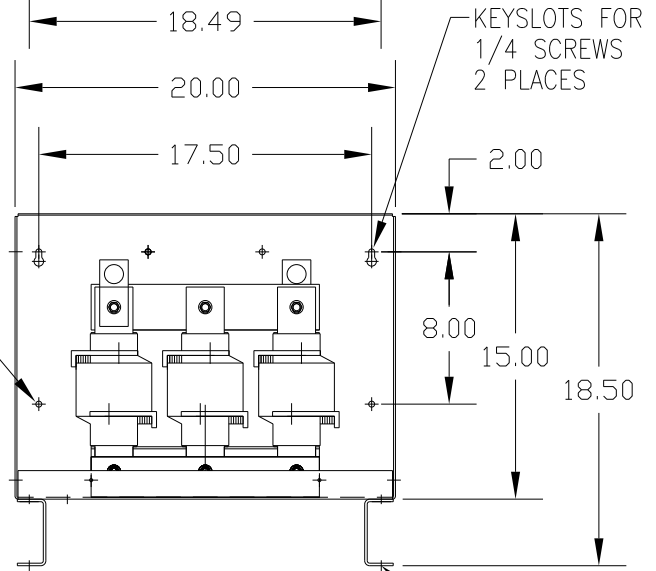
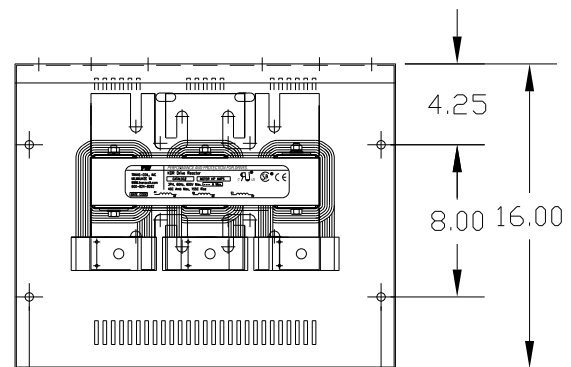
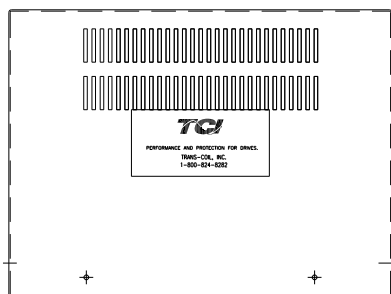


CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS	TERMINAL HOLE SIZE
KDRL2LC5	480	500	590	518	160	.53

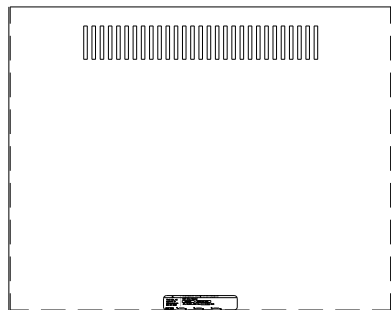

.328 DIA.  
2 HOLES

.44 DIA.  
4 MTG. HOLES

LOCATION FOR CUSTOMERS  
CONDUIT FITTING  
(BOTH SIDES)

CUSTOMER IS RESPONSIBLE FOR INSTALLATION  
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

				TOLERANCES (EXCEPT AS NOTED): DECIMAL .XX ± .03 .XXX ± .01 FRACTIONAL ± 1/32 ANGULAR ± 1/2°		7878 N. 86th STREET MILWAUKEE, WI 53224	
				KDR DRIVE REACTOR 480V LOW Z, FRAME L			
NO	REVISION	DATE	BY	DRN BY DSW	DATE 1/26/12	DWG. NO. B	KDR L2LC5DG SHT. 1 of 1