


CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS	TERMINAL HOLE SIZE
KDRL31PC5	575	400	382	NOTE:1	135	.53

NOTE 1: WATTS LOSS WILL VARY DUE TO FUNDAMENTAL FREQUENCY, CARRIER FREQUENCY AND OTHER SYSTEM CHARACTERISTICS.
 KDR DRIVE REACTORS COMPLY WITH THE THERMAL AND ALTITUDE STANDARDS SET FORTH BY NEMA ST20-1992..

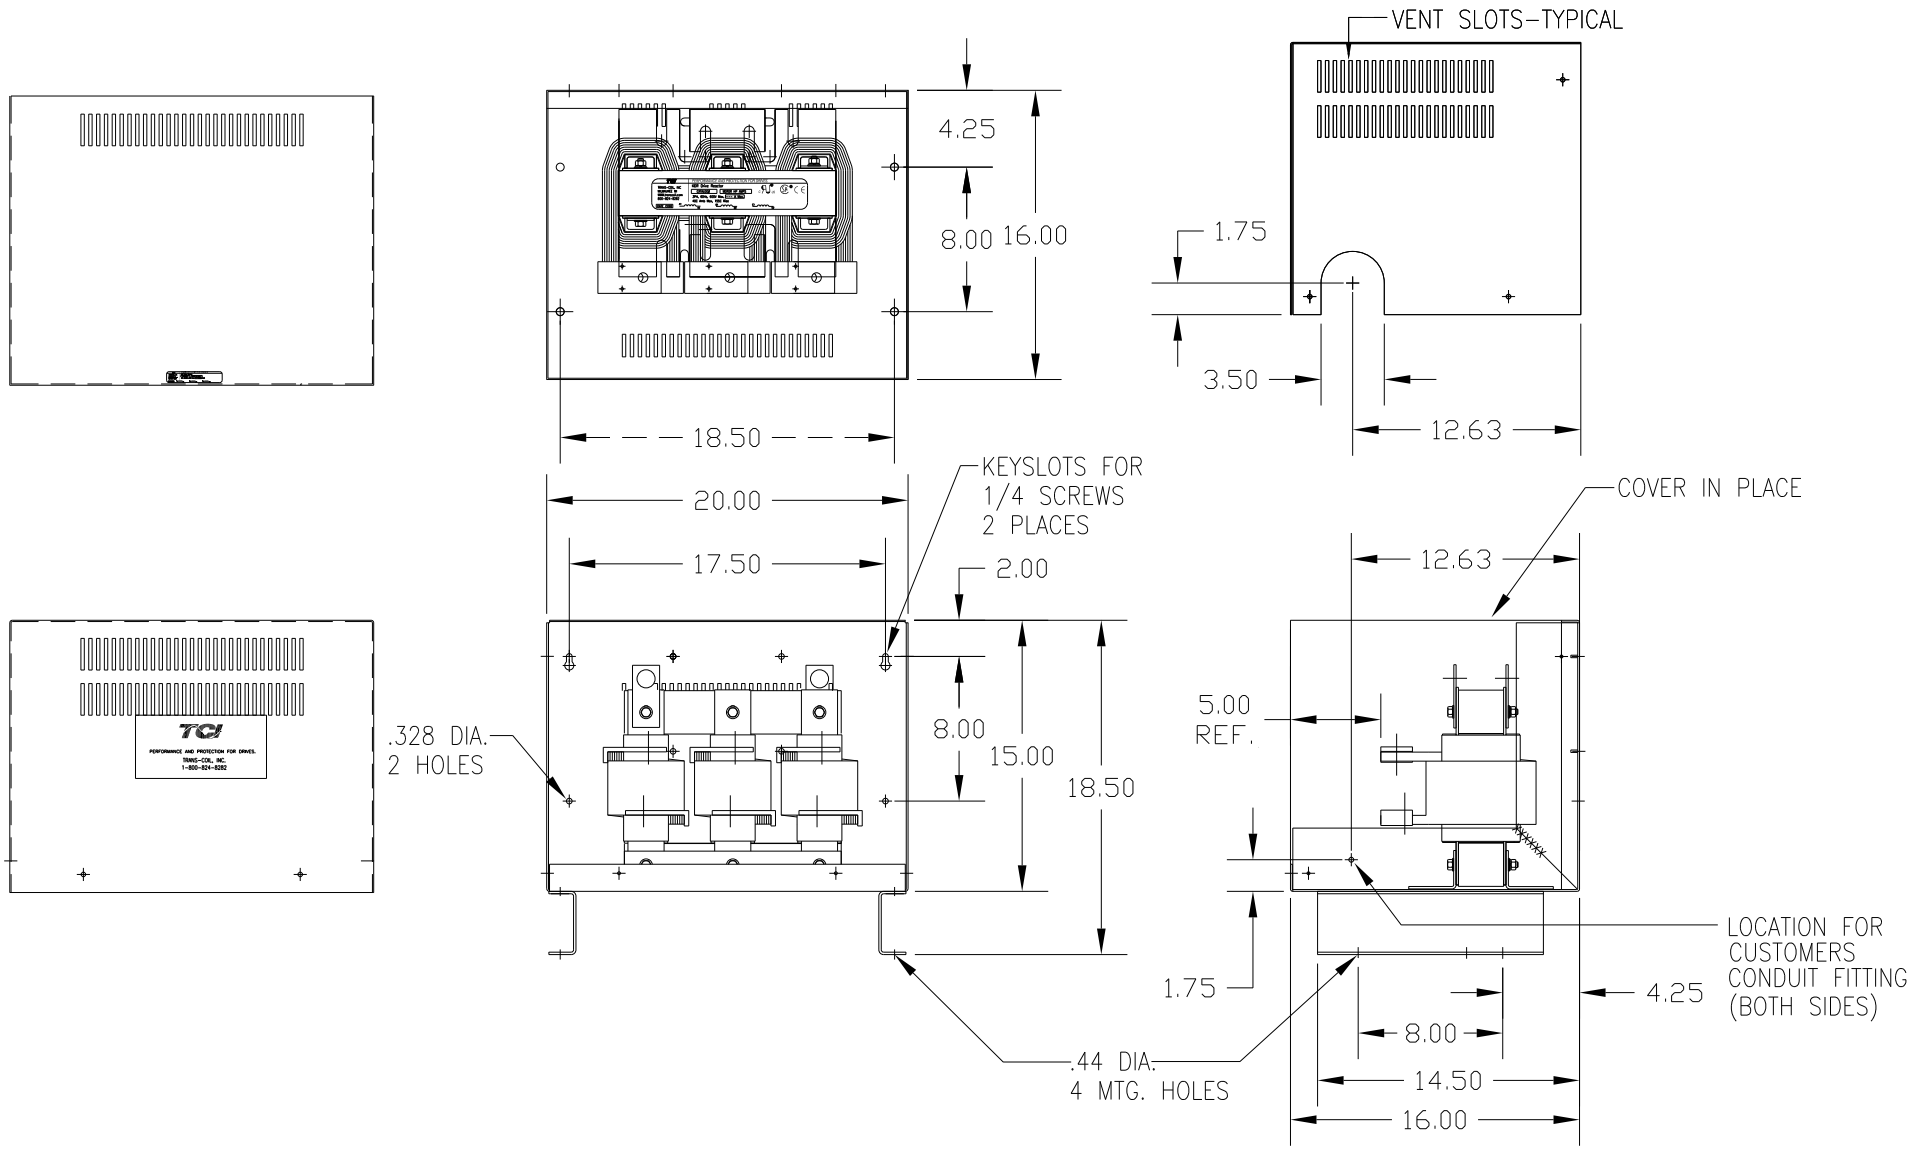

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

TOLERANCES (EXCEPT AS NOTED)				TCI 7878 N. 86th STREET MILWAUKEE, WI 53224
DECIMAL				
.XX ± .03				KDR OUTPUT REACTOR 575V, FRAME L
.XXX ± .01				
FRACTIONAL ± 1/32				
ANGULAR ± 1/2°				DRN BY DSW DATE 1/26/12 DWG. NO. B KDRL31PC5DG
NO	REVISION	DATE	BY	SCALE APRV.D. SHT. 1 OF 1