


CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS	TERMINAL HOLE SIZE
KDRL32PC5	575	500	472	NOTE:1	145	.53

NOTE 1: WATTS LOSS WILL VARY DUE TO FUNDAMENTAL FREQUENCY, CARRIER FREQUENCY AND OTHER SYSTEM CHARACTERISTICS.
 KDR DRIVE REACTORS COMPLY WITH THE THERMAL AND ALTITUDE STANDARDS SET FORTH BY NEMA ST20-1992..

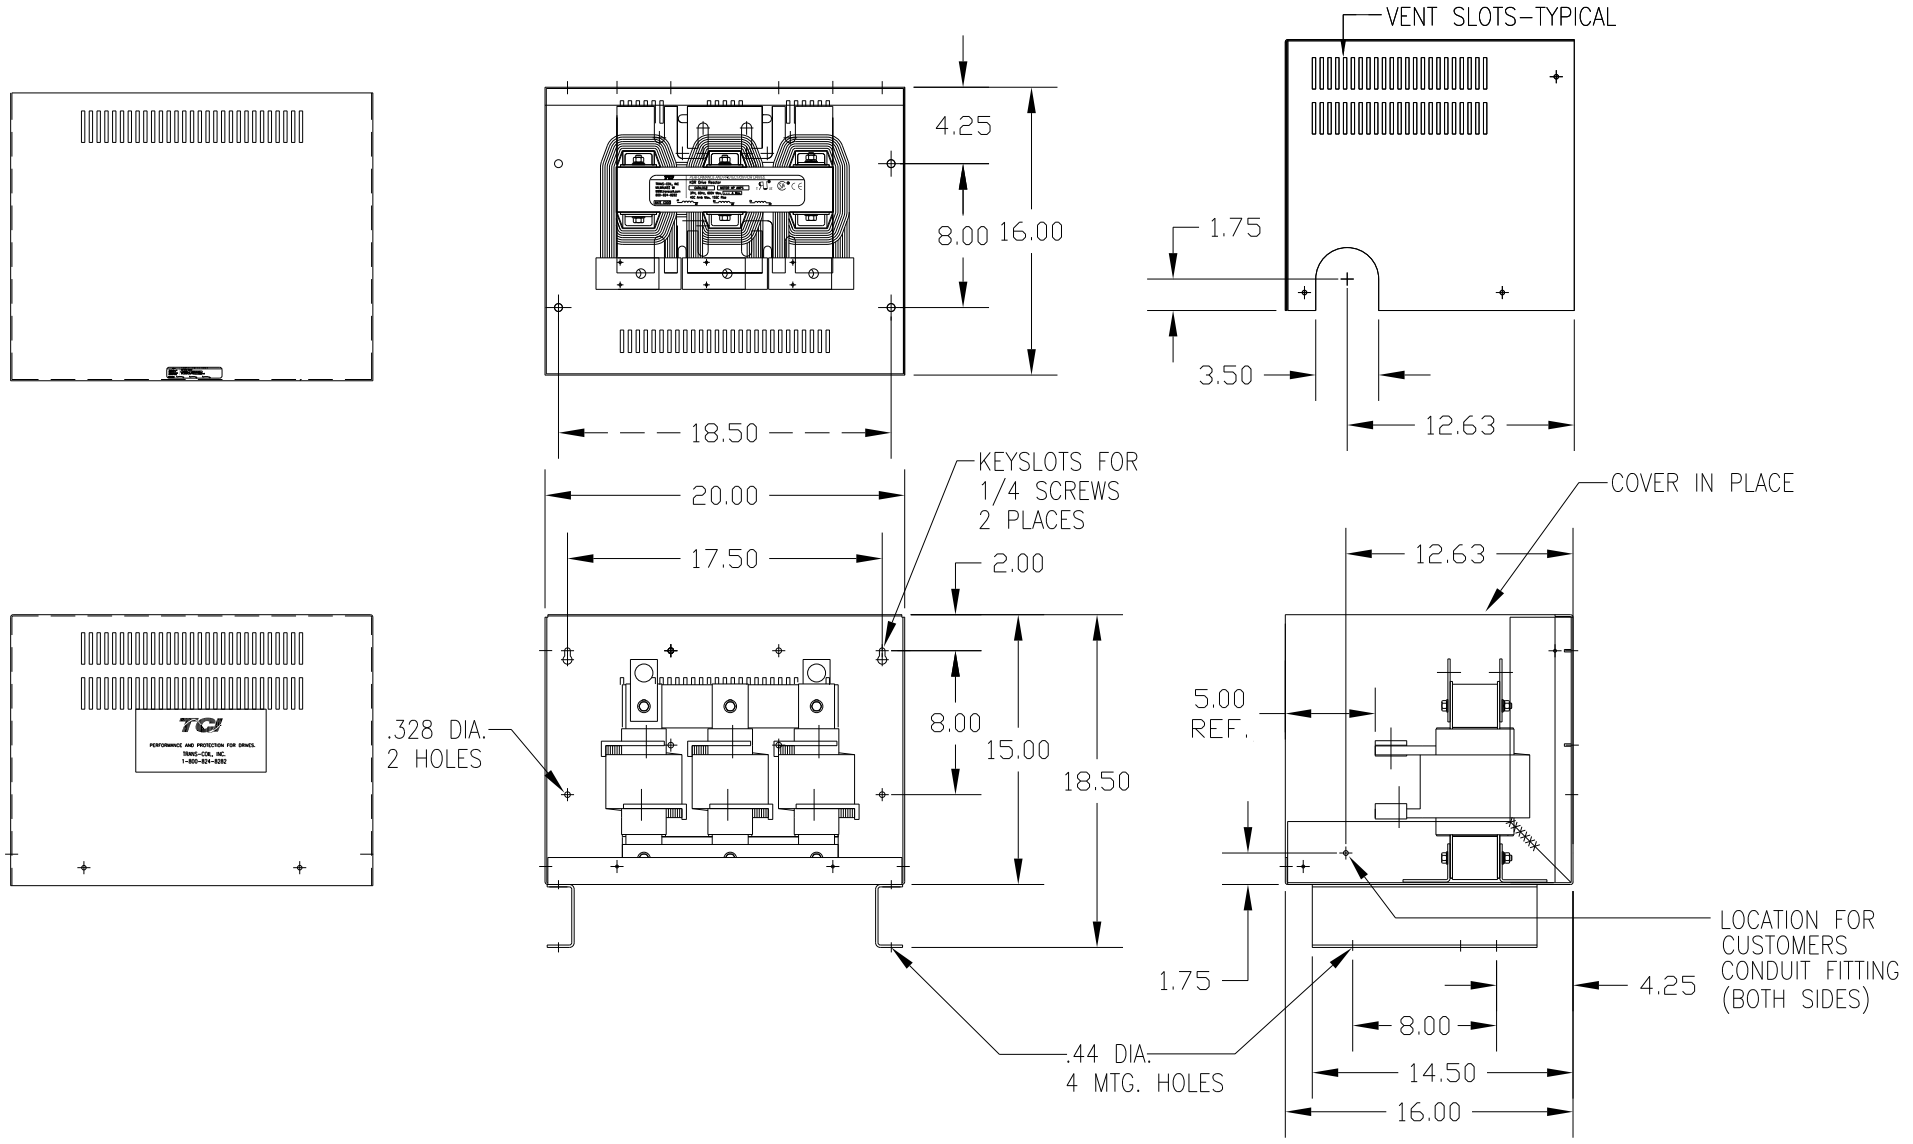

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

				TOLERANCES (EXCEPT AS NOTED)		7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL			
				.XX ± .03		KDR OUTPUT REACTOR 575V, FRAME L	
				.XXX ± .01			
				FRACTIONAL		DRN BY DSW DATE 1/26/12 DWG. NO. KDRL32PC5DG	
				± 1/32		SCALE	
				ANGULAR		APRVD. B	
				± 1/2°		SHT. 1 OF 1	
NO.	REVISION	DATE	BY				