

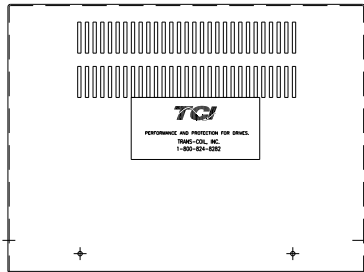


CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS	TERMINAL HOLE SIZE
KDRL35PC5	575	450	412	NOTE:1	135	.53


NOTE 1: WATTS LOSS WILL VARY DUE TO FUNDAMENTAL FREQUENCY, CARRIER FREQUENCY AND OTHER SYSTEM CHARACTERISTICS.  
 KDR DRIVE REACTORS COMPLY WITH THE THERMAL AND ALTITUDE STANDARDS SET FORTH BY NEMA ST20-1992..

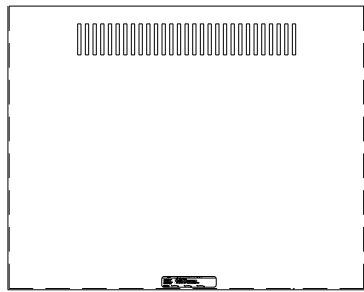


.328 DIA.  
2 HOLES

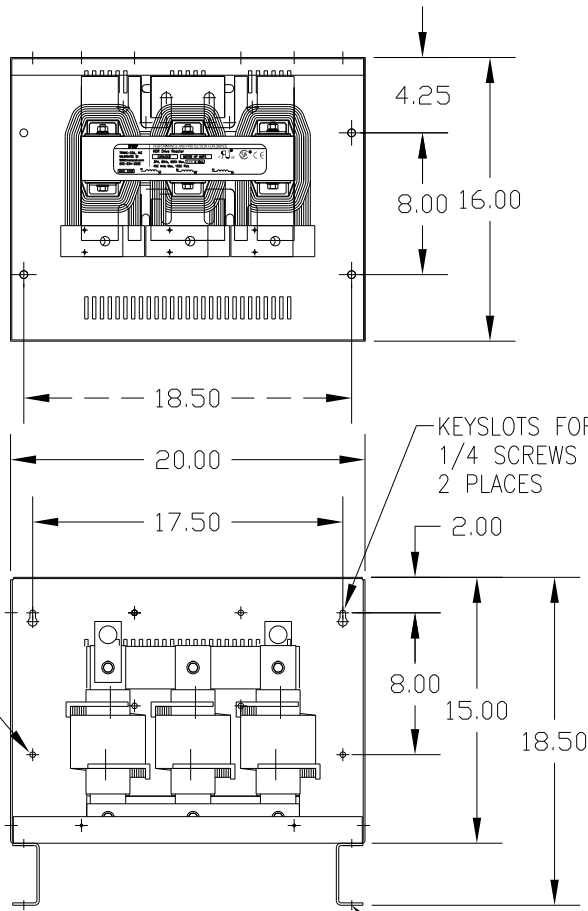

KEYSLOTS FOR  
1/4 SCREWS  
2 PLACES

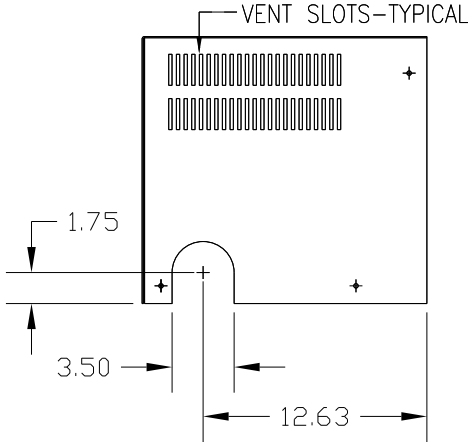

VENT SLOTS-TYPICAL

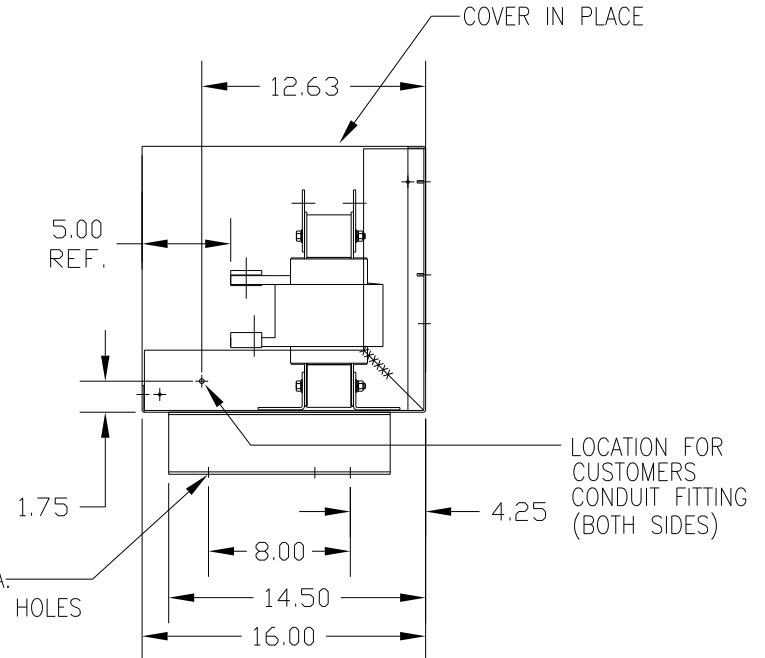

COVER IN PLACE

LOCATION FOR CUSTOMERS  
CONDUIT FITTING  
(BOTH SIDES)

CUSTOMER IS RESPONSIBLE FOR INSTALLATION  
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

TOLERANCES (EXCEPT AS NOTED)				TCI 7878 N. 86th STREET MILWAUKEE, WI 53224	
				KDR OUTPUT REACTOR	
				575V, FRAME L	
				DRN BY: DSW	DATE: 1/26/12
				SCALE:	APRVD: B
				DWG. NO. KDRL35PC5DG	
				SHT. 1 OF 1	