

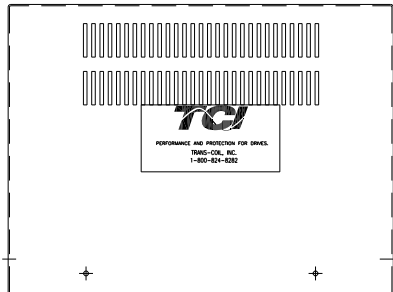



CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS	TERMINAL HOLE SIZE
KDRL3HC5	480	350	414	730	150	.53

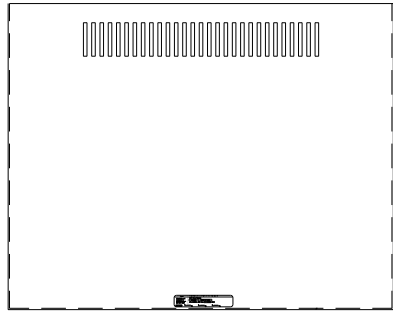


.328 DIA.
2 HOLES

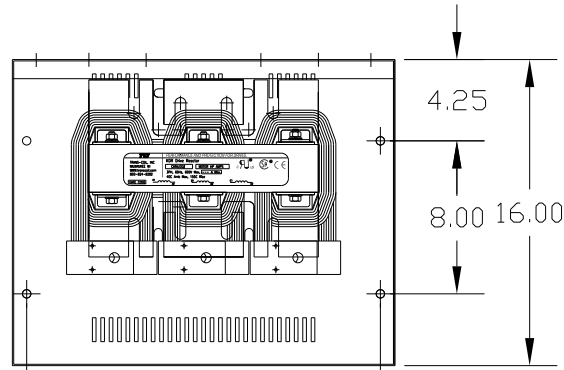


KEYSLOTS FOR
1/4 SCREWS
2 PLACES

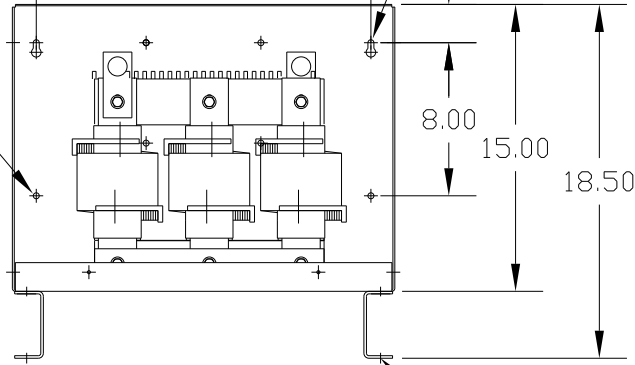


.44 DIA.
4 MTG. HOLES

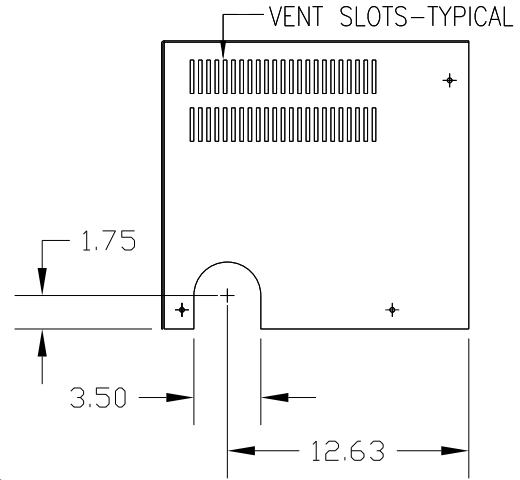

COVER IN PLACE

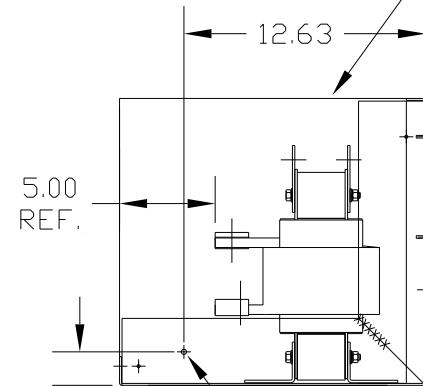

LOCATION FOR CUSTOMERS
CONDUIT FITTING
(BOTH SIDES)

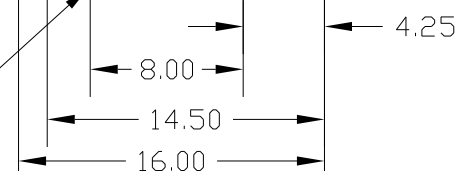

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

TOLERANCES (EXCEPT AS NOTED)				TCI 7878 N. 86th STREET MILWAUKEE, WI 53224	
			DECIMAL	KDR DRIVE REACTOR 480V HIGH Z, FRAME L	
			.XX ± .03		
			.XXX ± .01		
			FRACTIONAL ± 1/32		
			ANGULAR ± 1/2°	DRN BY DSW	DATE 1/26/12
NO	REVISION	DATE	BY	SCALE	APRVD. B
					DWG. NO. KDRL3HC5DG
					SHT. 1 OF 1