
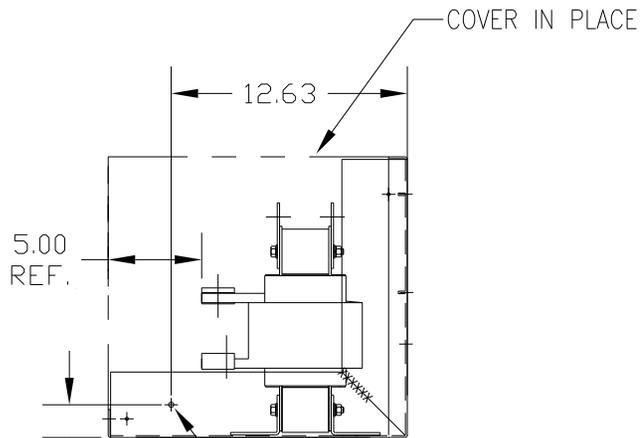
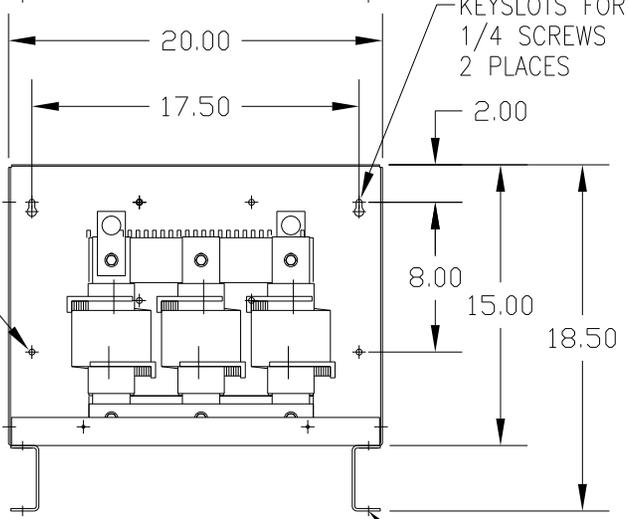
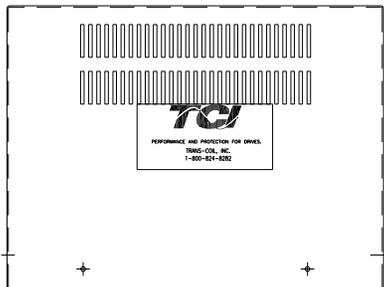
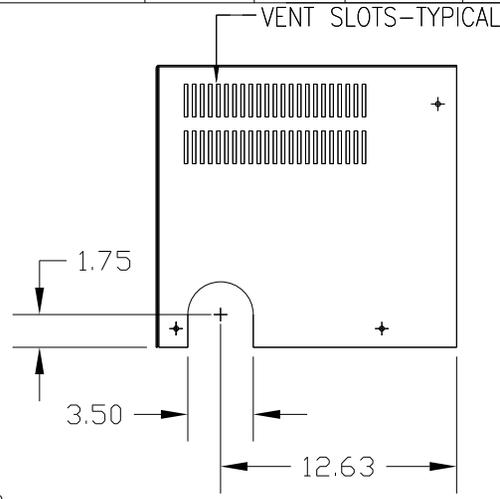
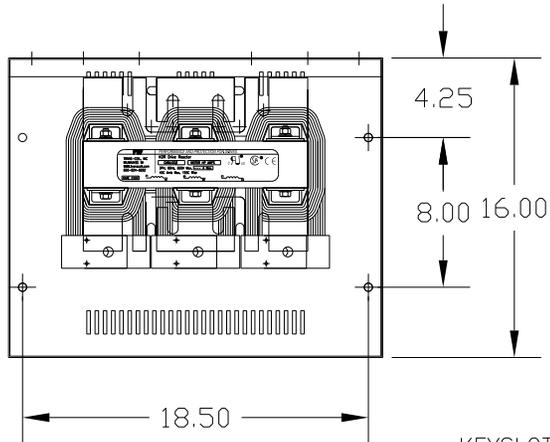


CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS	TERMINAL HOLE SIZE
KDRL6HC5	480	500	590	1021	170	.53

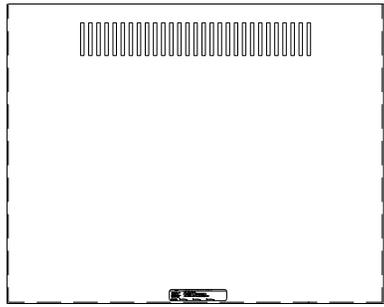

.328 DIA. 2 HOLES

KEYSLOTS FOR 1/4 SCREWS 2 PLACES

COVER IN PLACE

.44 DIA. 4 MTG. HOLES

LOCATION FOR CUSTOMERS CONDUIT FITTING (BOTH SIDES)

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

				TOLERANCES (EXCEPT AS NOTED)		7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL			
				.XX ± .03		KDR DRIVE REACTOR 480V HIGH Z, FRAME L	
				.XXX ± .01			
				FRACTIONAL		DRN BY DSW DATE 1/26/12 DWG NO. B	
				± 1/32		KDR L6HC5DG	
				ANGULAR		SCALE SHT. 1 OF 1	
				± 1/2°			
NO	REVISION	DATE	BY				