
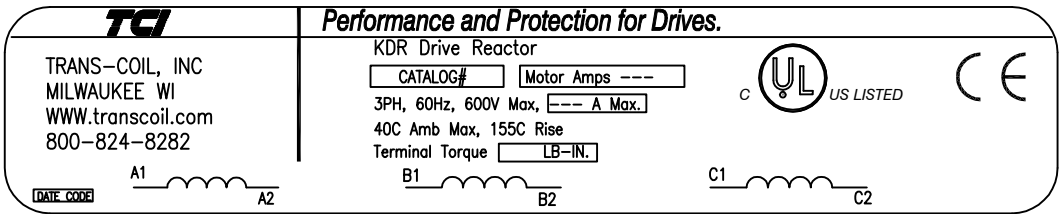


CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS	TORQUE (LB-IN)
KDRULG2LE01	480	300	361	381	132	275

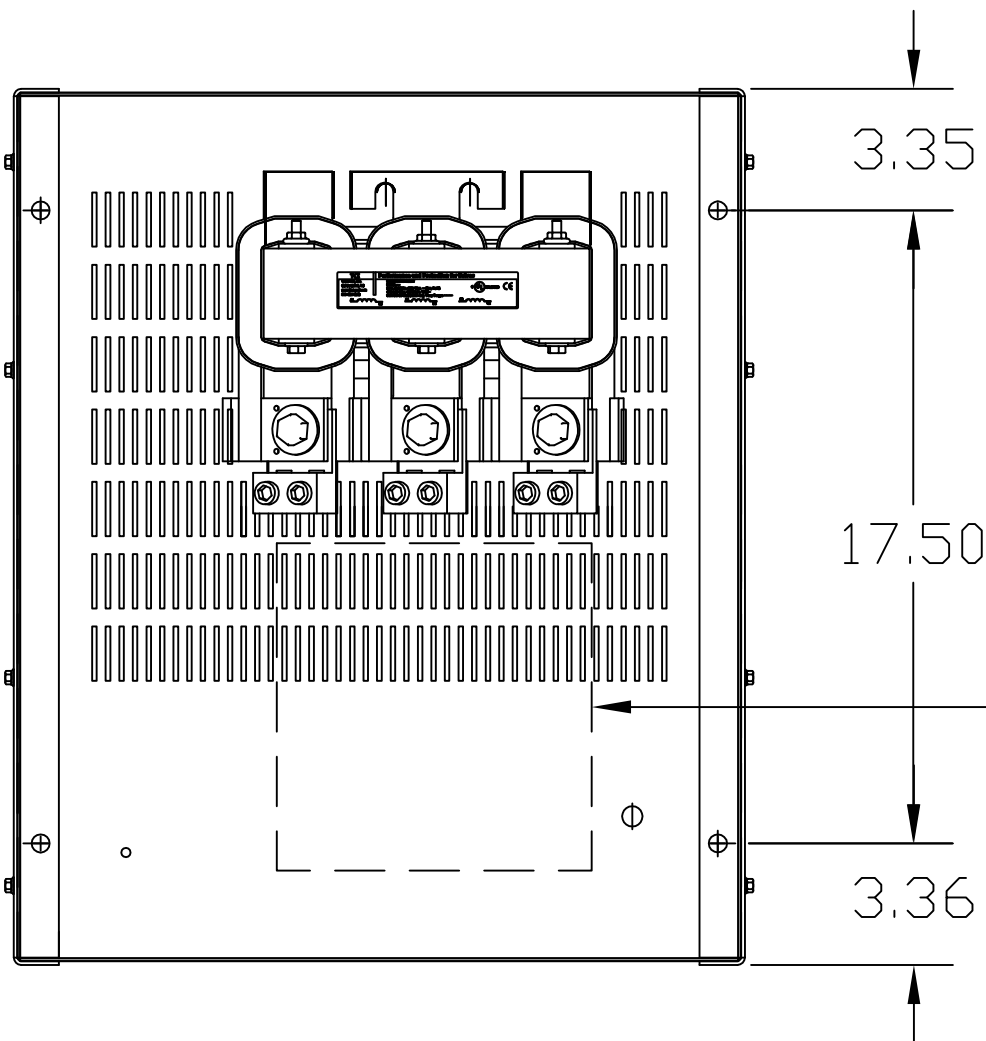

LABEL PLACED ON INSIDE WALL OF CABINET.




RECOMMENDED CONDUIT
ENTRANCE AREA – LEFT FRONT SIDE,
BOTTOM FRONT. RIGHT FRONT SIDE AND
TOP.

LUG WIRE RANGE TWO 350MCM-4, AL OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 275 LB-IN

NOTE 1: WATTS LOSS WILL VARY DUE TO FUNDAMENTAL FREQUENCY,
CARRIER FREQUENCY AND OTHER SYSTEM CHARACTERISTICS.

KDR DRIVE REACTORS COMPLY WITH THE THERMAL AND
ALTITUDE STANDARDS SET FORTH BY NEMA ST20-1992..

NEC MOTOR CURRENTS SHOWN IN THE 208/240 VOLT CHART
ARE BASED ON HORSEPOWER AT 208 VOLT. 575/600 VOLT
CHART USE THE 575 VOLT CURRENT RATING.

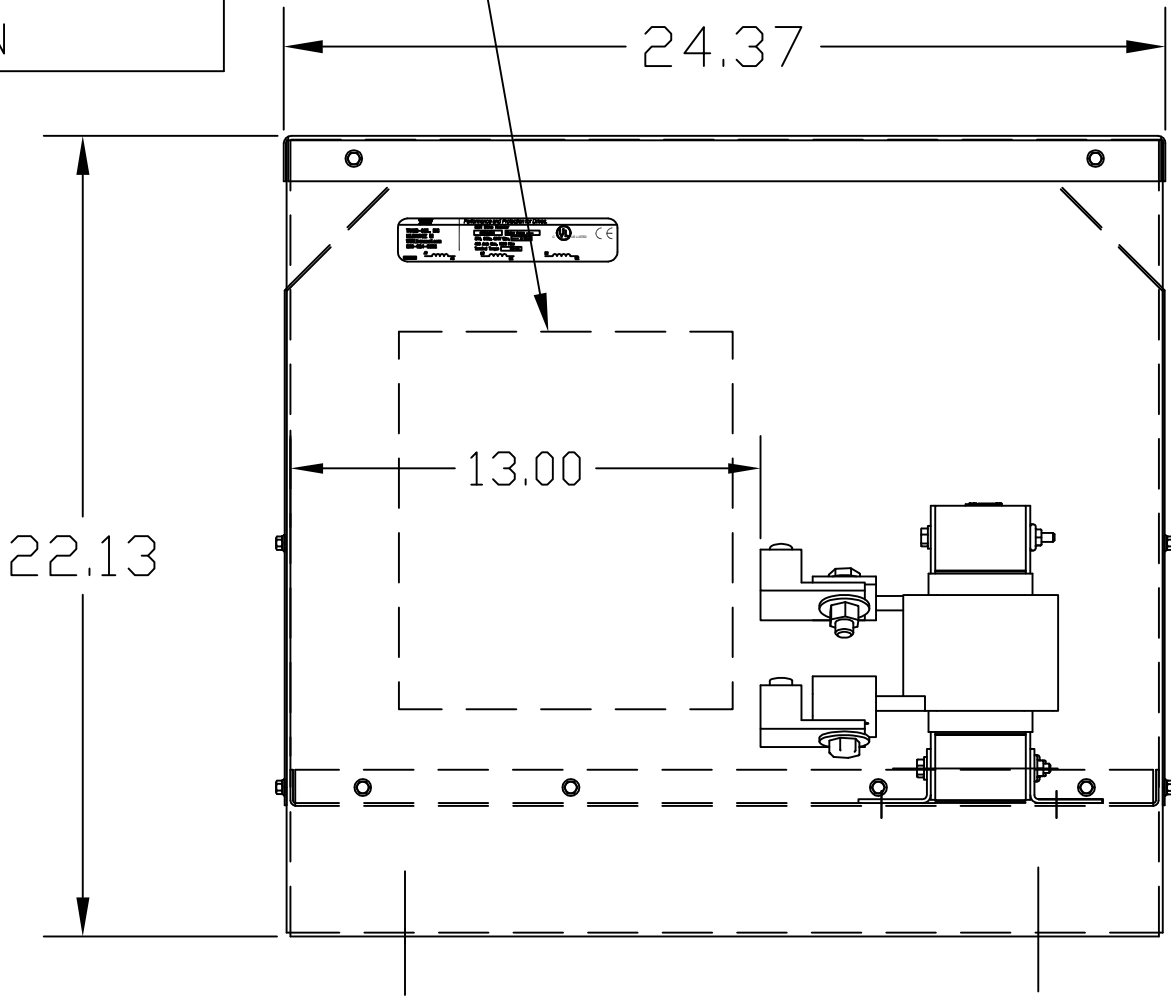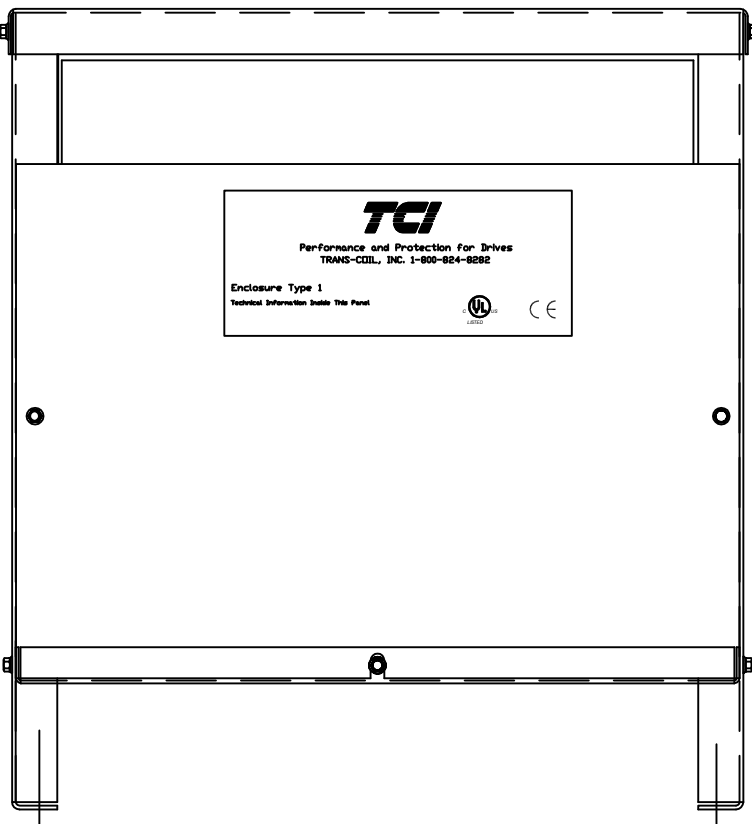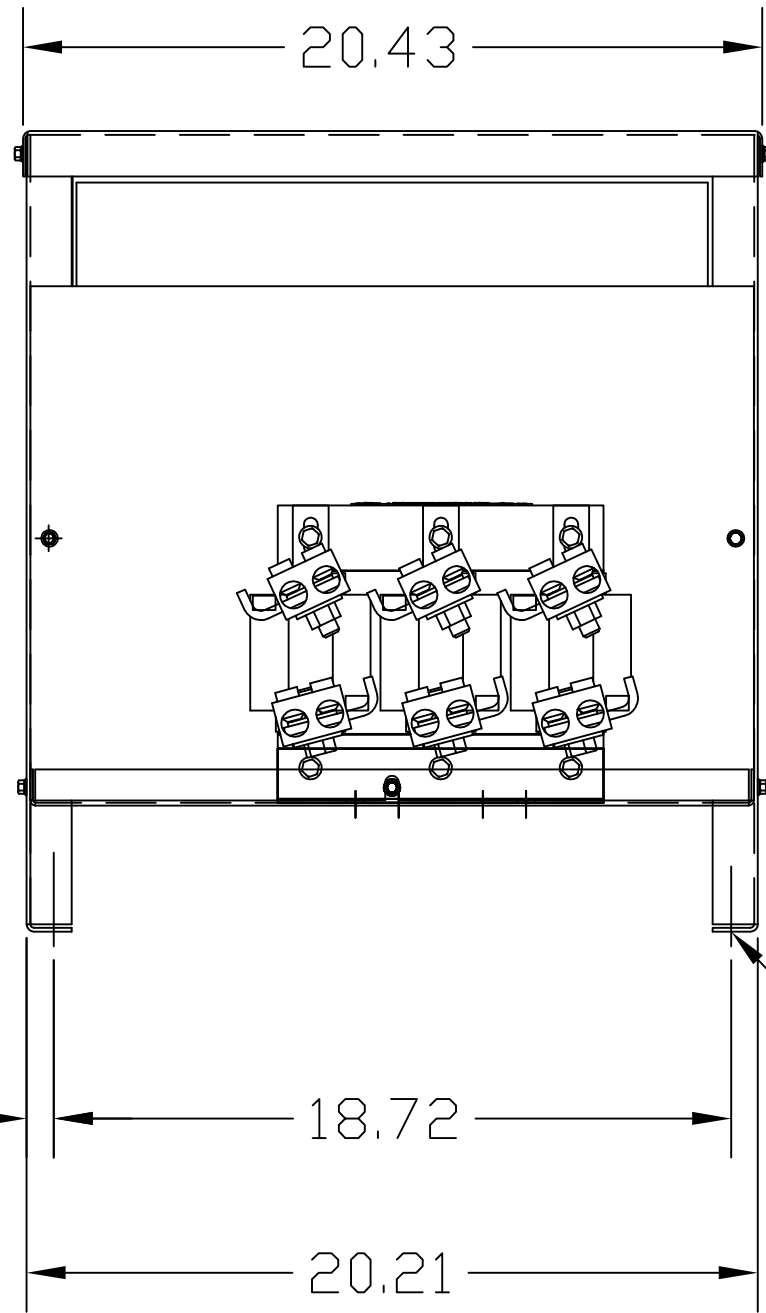

VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

.50 DIA
MOUNTING HOLE
(4 PLACES)

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL LOCAL AND NATIONAL CODES

				TOLERANCES (EXCEPT AS NOTED)	 W132 N10611 Grant Drive Germantown, WI 53022	
				DECIMAL		
				.XX ±.25	KDR DRIVE REACTOR 480V, ENCLOSED, TYPE 1	
				.XXX±.10		
B	3639, UPDATE VIEWS	6/6/16	DSW	FRACTIONAL ± 1/16	DRN. BY DSW	DATE 6/21/04
A	3465 CORRECT, AMPS			ANGULAR ± 1°	SCALE	APRVD.
A	WATTS ON DRAWING	12/18/15	DSW			DWG. NO. B KDRULG2LE01DG
NO	REVISION	DATE	BY			SHT. 1 OF 1