



.44 DIA
MOUNTING HOLES
4 PLACES.

CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS	TORQUE (LB-IN)
KDRULH24HE01	208/240	60	169	220	81	275

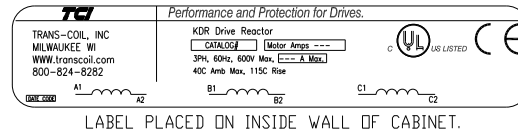

LUG WIRE RANGE 250MCM-6, AL OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 275 LB-IN

NEC MOTOR CURRENTS SHOWN IN THE 208/240 VOLT CHART ARE BASED ON HORSEPOWER AT 208 VOLT. 575/600 VOLT CHART USE THE 575 VOLT CURRENT RATING.

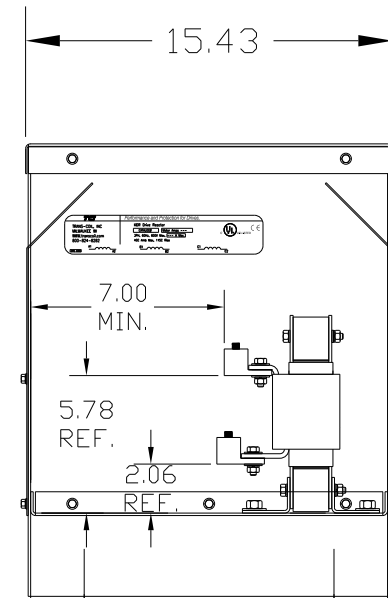

VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL LOCAL AND NATIONAL CODES

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

NO	REVISION	DATE	BY	TOLERANCES (EXCEPT AS NOTED): DECIMAL .XX ± .03 .XXX ± .01 FRACTIONAL ± 1/32 ANGULAR ± 1/2°	7878 N. 86th STREET MILWAUKEE, WI 53224 KDR DRIVE REACTOR 240V, ENCLOSED, TYPE 1 <table border="1"> <tr> <td>DRN BY</td> <td>DATE</td> <td>DRG. NO.</td> </tr> <tr> <td>DSW</td> <td>6/21/04</td> <td>B KDRULH24HE01DG</td> </tr> <tr> <td>SCALE</td> <td>APPRD.</td> <td>SHT. 1 OF 1</td> </tr> </table>	DRN BY	DATE	DRG. NO.	DSW	6/21/04	B KDRULH24HE01DG	SCALE	APPRD.	SHT. 1 OF 1
DRN BY	DATE	DRG. NO.												
DSW	6/21/04	B KDRULH24HE01DG												
SCALE	APPRD.	SHT. 1 OF 1												