

LABEL PLACED ON INSIDE WALL OF CABINET.



LABEL PLACED ON FRONT OF CABINET.



CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS	AMPS MAX.
KDRULJ1LE3R	480	400	477	470	150	520

NOTE 1: WATTS LOSS WILL VARY DUE TO FUNDAMENTAL FREQUENCY, CARRIER FREQUENCY AND OTHER SYSTEM CHARACTERISTICS.

KDR DRIVE REACTORS COMPLY WITH THE THERMAL AND ALTITUDE STANDARDS SET FORTH BY NEMA ST20-1992..

NEC MOTOR CURRENTS SHOWN IN THE 208/240 VOLT CHART ARE BASED ON HORSEPOWER AT 208 VOLT. 575/600 VOLT CHART USE THE 575 VOLT CURRENT RATING.


NOTE: ROTATE AS NEEDED TO MEET .50 CLEARANCE BETWEEN TERMINAL OR LUGS (PHASE TO PHASE). ALSO .50 CLEARANCE FROM TERMINALS OR LUGS TO GROUNDING SURFACE.

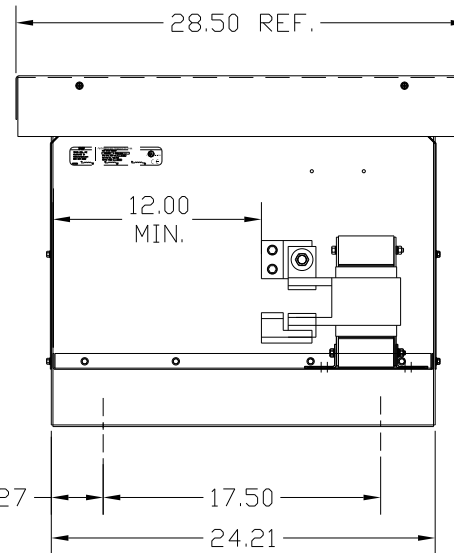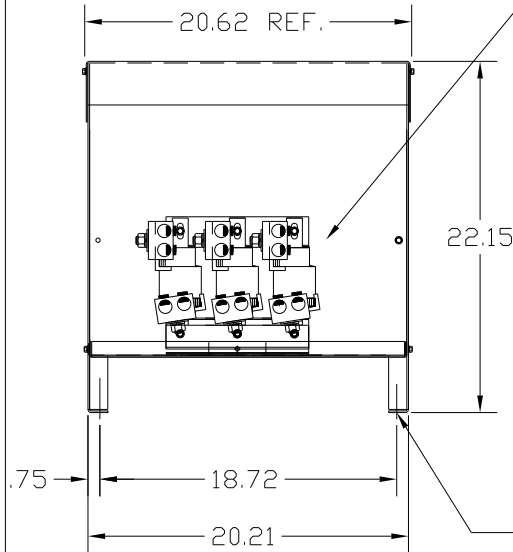

LUG WIRE RANGE TWO 600MCM-2, AL. OR CU. FOR REACTOR.  
TIGHTENING TORQUE. 500 LB-IN

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL LOCAL AND NATIONAL CODES

				TOLERANCES (EXCEPT AS NOTED):	 7878 N. 86th STREET MILWAUKEE, WI 53224  <b>KDR DRIVE REACTOR</b> <b>480V, ENCLOSED, TYPE 3R</b>
				DECIMAL	
				.XX ± .03 .XXX ± .01	
				FRACTIONAL ± 1/32	
				ANGULAR ± 1/2°	DRN. BY DSW DATE 6/21/04 DWG. NO. BKDRULJ1LE3R
NO	REVISION	DATE	BY	SCALE	APRVD. SHT. 1 OF 1