


LABEL PLACED ON INSIDE WALL OF CABINET.

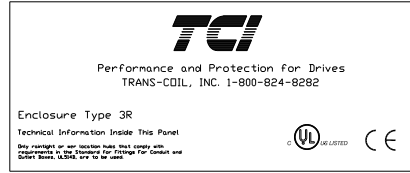



LABEL PLACED ON FRONT OF CABINET.

| CATALOG NO | VOLTAGE | NEC MOTOR HP | NEC MOTOR CURRENT | WATTS LOSS | APPROX. WEIGHT-LBS | AMPS MAX. |
|-------------|---------|--------------|-------------------|------------|--------------------|-----------|
| KDRULJ2LE3R | 480 | 350 | 414 | 465 | 150 | 500 |

NOTE 1: WATTS LOSS WILL VARY DUE TO FUNDAMENTAL FREQUENCY, CARRIER FREQUENCY AND OTHER SYSTEM CHARACTERISTICS.

KDR DRIVE REACTORS COMPLY WITH THE THERMAL AND ALTITUDE STANDARDS SET FORTH BY NEMA ST20-1992..


NEC MOTOR CURRENTS SHOWN IN THE 208/240 VOLT CHART ARE BASED ON HORSEPOWER AT 208 VOLT. 575/600 VOLT CHART USE THE 575 VOLT CURRENT RATING.

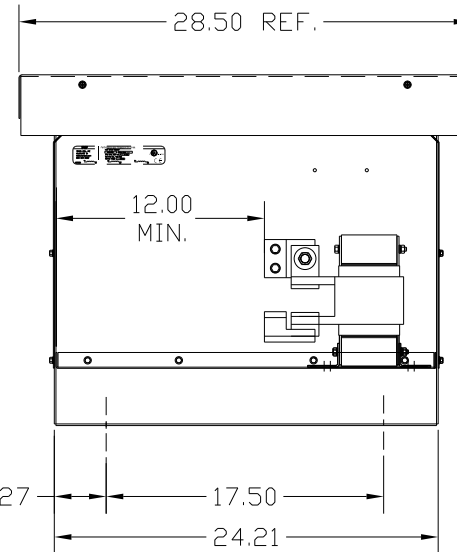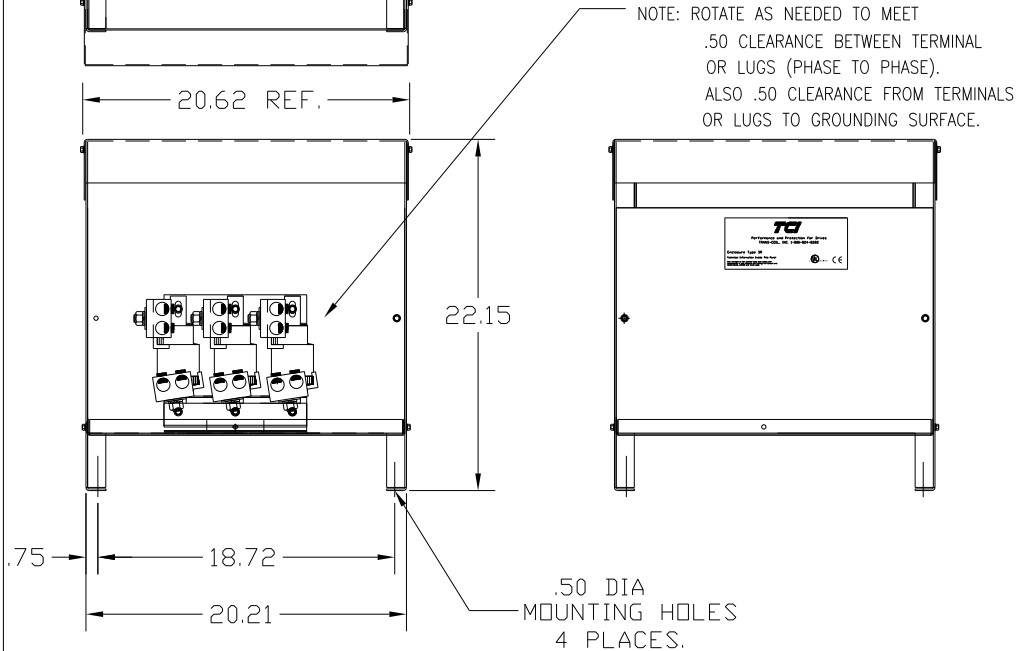

LUG WIRE RANGE TWO 600MCM-2, AL. OR CU. FOR REACTOR.
TIGHTENING TORQUE. 500 LB-IN

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL LOCAL AND NATIONAL CODES

| | | | | | | |
|----|----------|------|----|-------------------------------|--------------|--|
| | | | | TOLERANCES (EXCEPT AS NOTED): | |  7878 N. 86th STREET MILWAUKEE, WI 53224 KDR DRIVE REACTOR 480V, ENCLOSED, TYPE 3R |
| | | | | DECIMAL | | |
| | | | | .XX ± .03 | | |
| | | | | .XXX ± .01 | | |
| | | | | FRACTIONAL ± 1/32 | | |
| | | | | ANGULAR ± 1/2° | | |
| NO | REVISION | DATE | BY | DRN. BY DSW | DATE 6/21/04 | DWG. NO. BKDRULJ2LE3R SHT. 1 of 1 |
| | | | | SCALE | APRVD. | |