



LUG WIRE RANGE FOR REACTOR.	250MCM-6, AL OR CU
TIGHTENING TORQUE.	275 LB-IN

KDR DRIVE REACTORS COMPLY WITH THE THERMAL AND ALTITUDE STANDARDS SET FORTH BY NEMA ST20-1992..

NEC MOTOR CURRENTS SHOWN IN THE 208/240 VOLT CHART ARE BASED ON HORSEPOWER AT 208 VOLT. 575/600 VOLT CHART USE THE 575 VOLT CURRENT RATING.

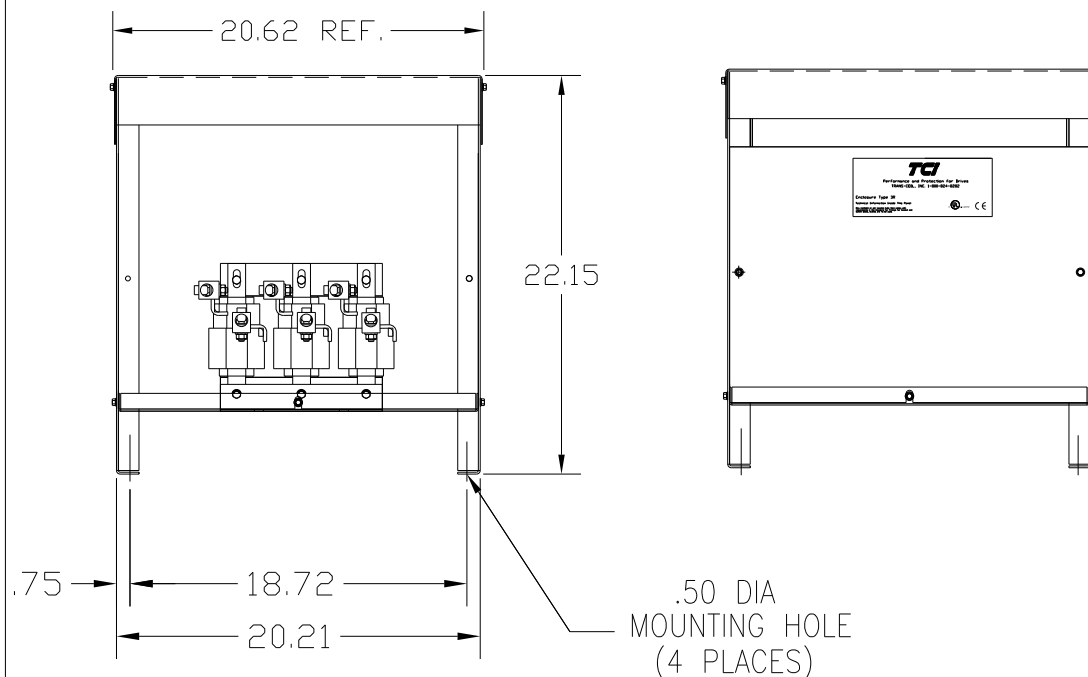

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY
WITH UL514B FOR TYPE 3R ENCLOSURES.

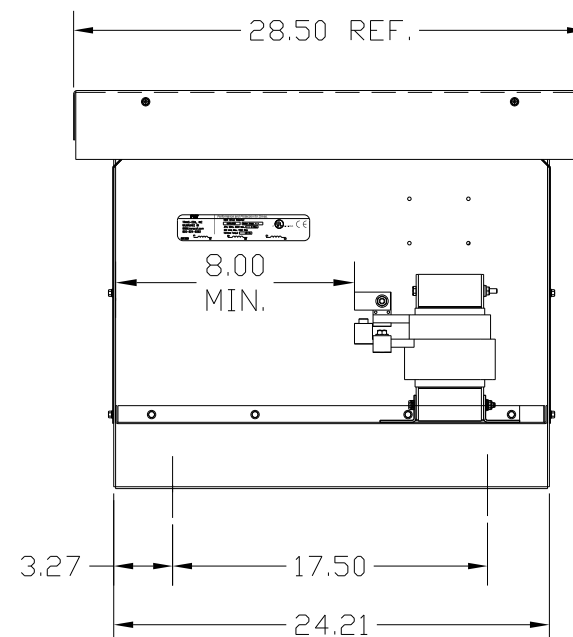

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

FINISH:
VENDOR - LILLY POWDER COATINGS, INC.
PRODUCT CODE - 312E
COLOR - PEBBLE GRAY
POWDER TYPE - POLYESTER-POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
AND APPLIED PER A UL ACCEPTED DTVV2 COATING PROGRAM.

				TOLERANCES (EXCEPT AS NOTED)		 7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL		KDR DRIVE REACTOR 575V, ENCLOSED, TYPE 3R	
				XX $\pm$.03			
				XXX $\pm$.01			
				FRACTIONAL $\pm$ 1/32			
				ANGULAR $\pm$ 1/2°		DRN. BY <u>DSW</u> DATE <u>9/20/04</u> DWG. NO. SCALE _____ APPRVD. _____ KDRUL J41HE3RDG	
NO.	REVISION	DATE	BY	SHI 1. 01			