


CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS	TORQUE (LB-IN)
KDRULL45LE3R	575/600	500	472	593	295	SEE BELOW

LUG WIRE RANGE TWO 350MCM-4, AL. OR CU.  
FOR REACTOR.  
TIGHTENING TORQUE. 275 LB-IN





LABEL PLACED ON INSIDE WALL OF CABINET.

NOTE 1: WATTS LOSS WILL VARY DUE TO FUNDAMENTAL FREQUENCY,  
CARRIER FREQUENCY AND OTHER SYSTEM CHARACTERISTICS.

KDR DRIVE REACTORS COMPLY WITH THE THERMAL AND  
ALTITUDE STANDARDS SET FORTH BY NEMA ST20-1992..

NEC MOTOR CURRENTS SHOWN IN THE 208/240 VOLT CHART  
ARE BASED ON HORSEPOWER AT 208 VOLT. 575/600 VOLT  
CHART USE THE 575 VOLT CURRENT RATING.

NOTE: ROTATED AS NEEDED TO MEET  
CLEARANCE BETWEEN TERMINAL  
OR LUGS (PHASE TO PHASE).  
ALSO TO MEET CLEARANCE FROM TERMINALS  
OR LUGS TO GROUNDING SURFACE.

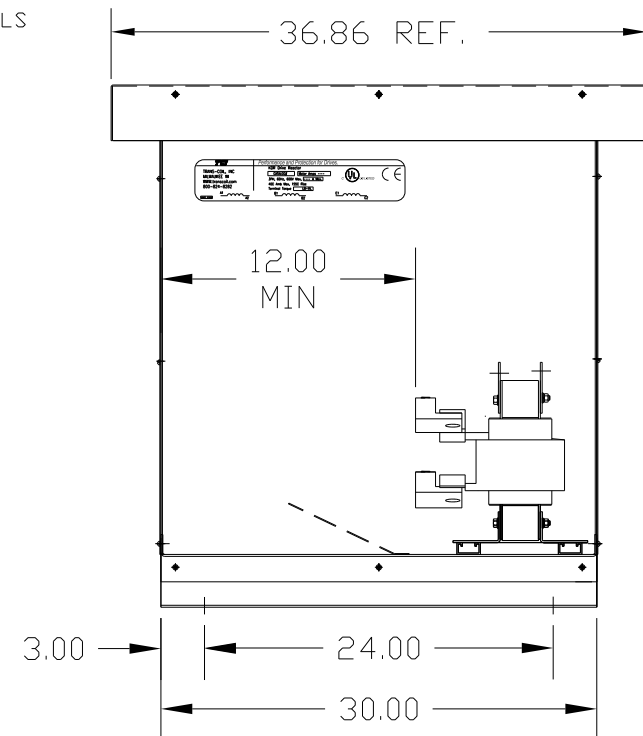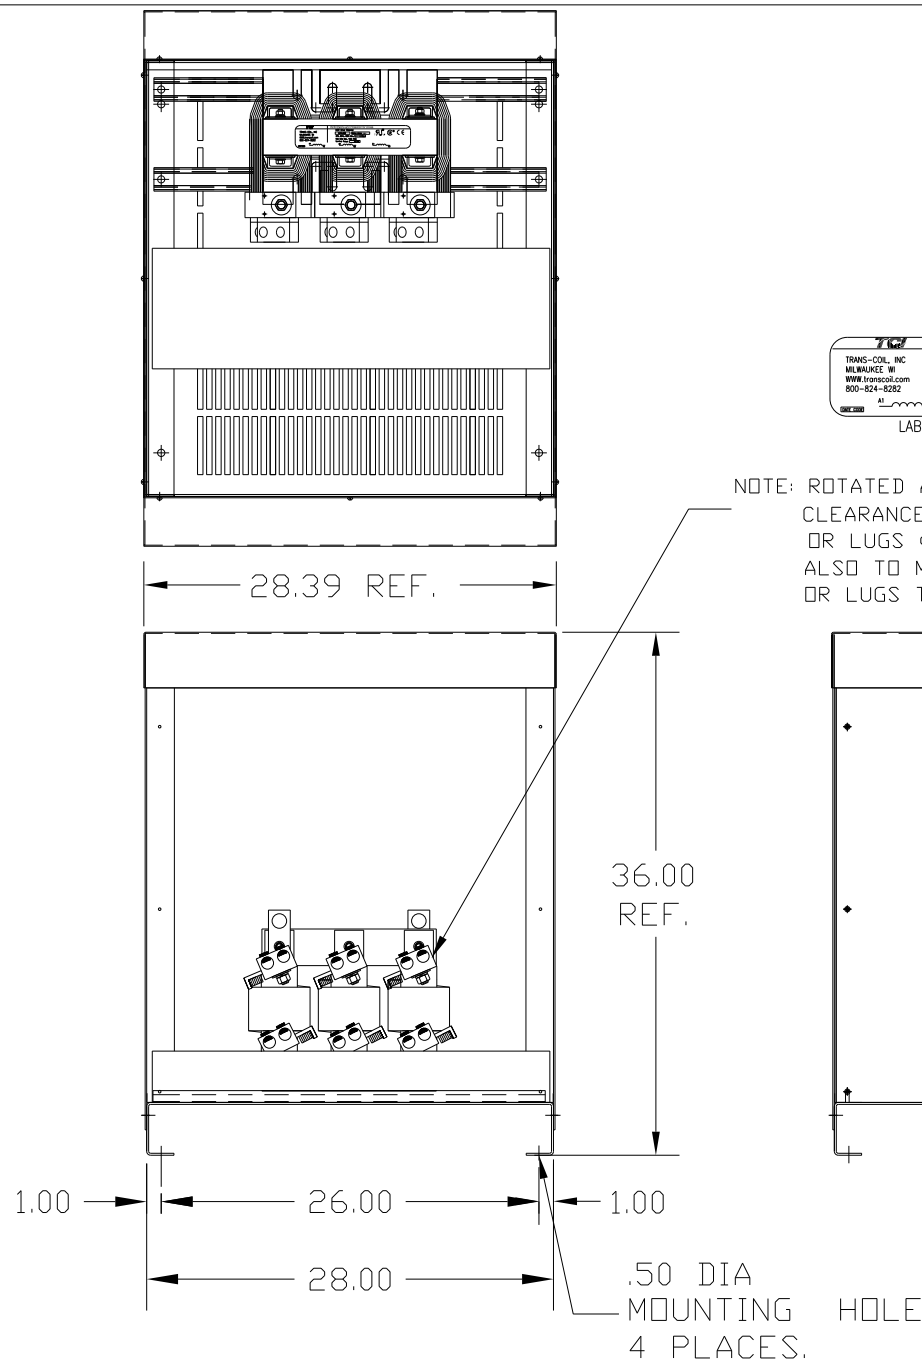


CUSTOMER IS RESPONSIBLE FOR INSTALLATION  
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

FINISH:  
VENDOR - LILLY POWDER COATINGS, INC.  
PRODUCT CODE - 312E  
COLOR - PEBBLE GRAY  
POWDER TYPE - POLYESTER-POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R  
AND APPLIED PER A UL ACCEPTED DTVV2 COATING PROGRAM.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY  
WITH UL514B FOR TYPE 3R ENCLOSURES.

				TOLERANCES (EXCEPT AS NOTED)	 7878 N. 86th STREET MILWAUKEE, WI 53224  KDR DRIVE REACTOR 575V, ENCLOSED, TYPE 3R
				DECIMAL	
				.XX ±.03	
				.XXX±.01	
				FRACTIONAL ± 1/32	DRN. BY DSW DATE 8/19/04 SCALE APRVD
				ANGULAR ± 1/2°	
NO	REVISION	DATE	BY		DWG. NO. KDRULL45LE3RDG SHT. 1 OF 1