


LABEL PLACED ON INSIDE WALL OF CABINET.

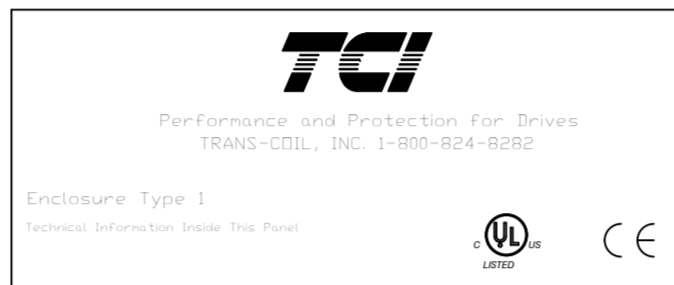

LABEL PLACED ON FRONT OF CABINET.


CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS
KDRULY42HE01	575\600	1500	1440	2985	915

NOTE 1: WATTS LOSS WILL VARY DUE TO FUNDAMENTAL FREQUENCY, CARRIER FREQUENCY AND OTHER SYSTEM CHARACTERISTICS.



KDR DRIVE REACTORS COMPLY WITH THE THERMAL AND ALTITUDE STANDARDS SET FORTH BY NEMA ST20-1992..

NEC MOTOR CURRENTS SHOWN IN THE 208/240 VOLT CHART ARE BASED ON HORSEPOWERS AT 208 VOLT. 575/600 VOLT CHART USE THE 575 VOLT CURRENT RATING.

LUG WIRE RANGE FOUR -800MCM-350MCM FOR REACTOR.
TIGHTENING TORQUE. 375 LB-IN

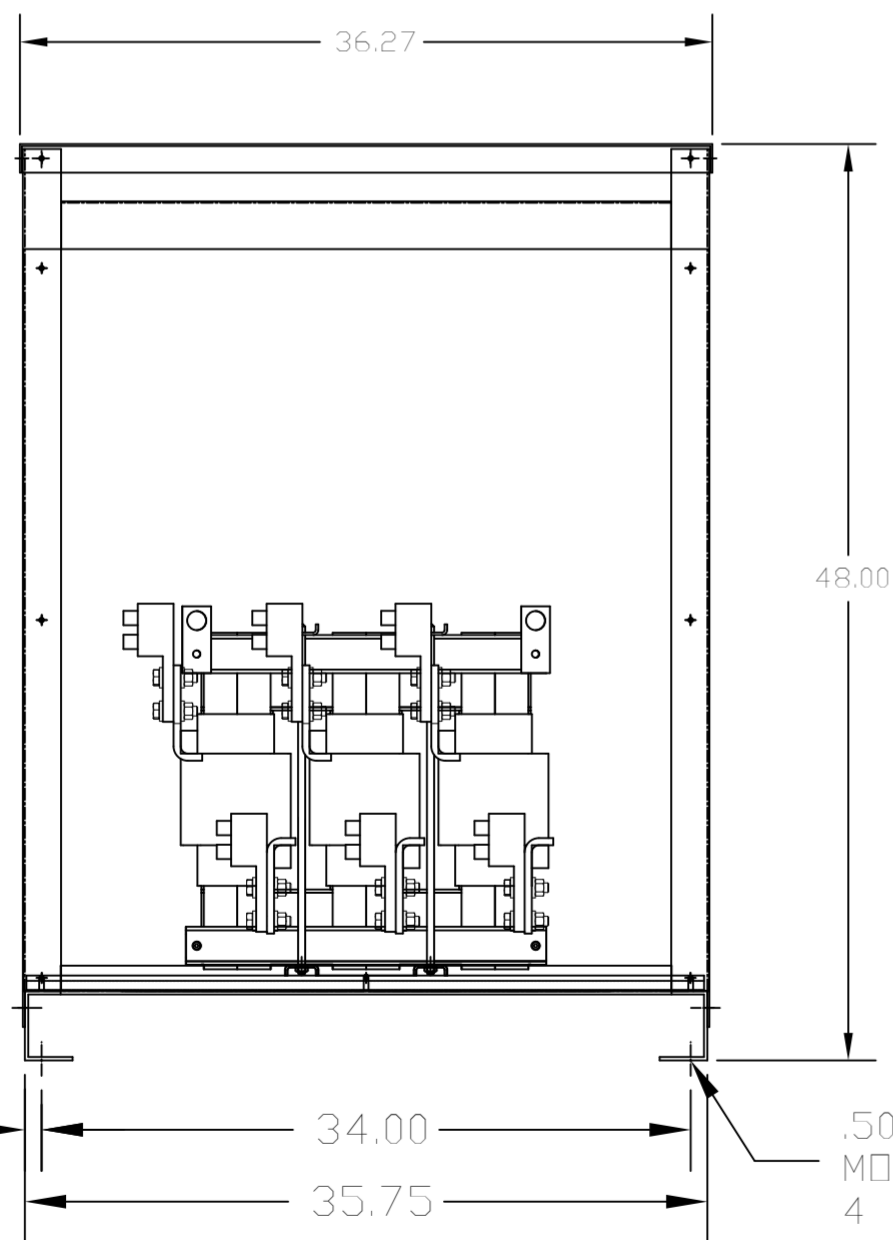

.50 DIA MOUNTING HOLE 4 PLACES.

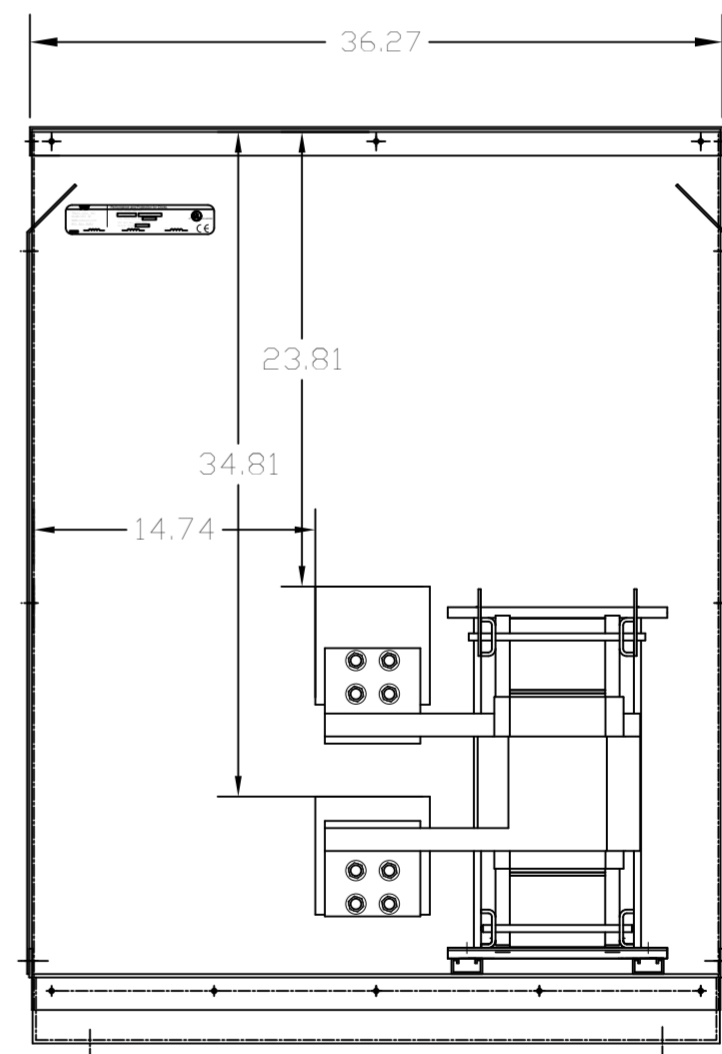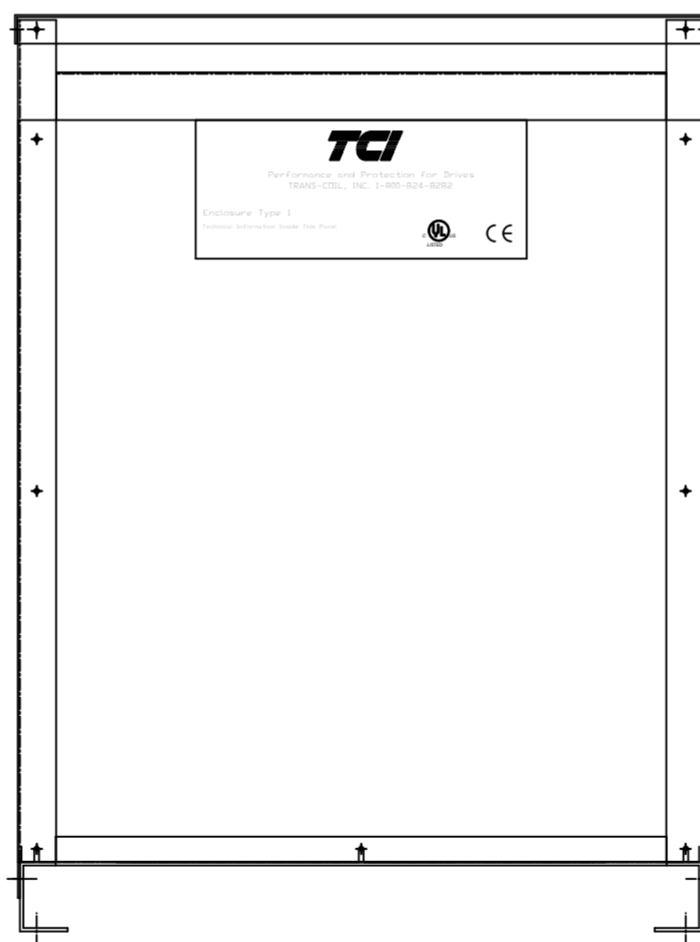

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL LOCAL AND NATIONAL CODES

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R AND APPLIED PER A UL ACCEPTED DTV2 COATING PROGRAM.

NO	REVISION	DATE	BY	TOLERANCES (EXCEPT AS NOTED)	DECIMAL	FRACTIONAL	ANGLE	SCALE	DATE	BY	APPROVE	REV. NO.	REV. DATE	REV. BY	REV. APPROVE
				.XX ±.03	.XXX ±.01	± 1/32	± 1/2°	TO FIT	6/5/2013	DSW		C			

TCI 7878 N. 86th STREET MILWAUKEE, WI 53224

KDR FRAME Y UL TYPE 1 ECLOSURE

KDRULY42HE01 SHT.1 of 1