| HP | TCI Part# | Amps Max. (A) | uH+/-5% | Approx Weight (LBS) |
|---|---|---|---|---|
| 125 | KDRX2FE | 144 | 1600 | 260 |

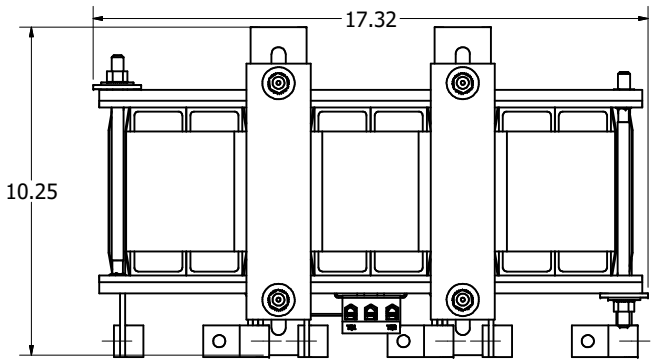


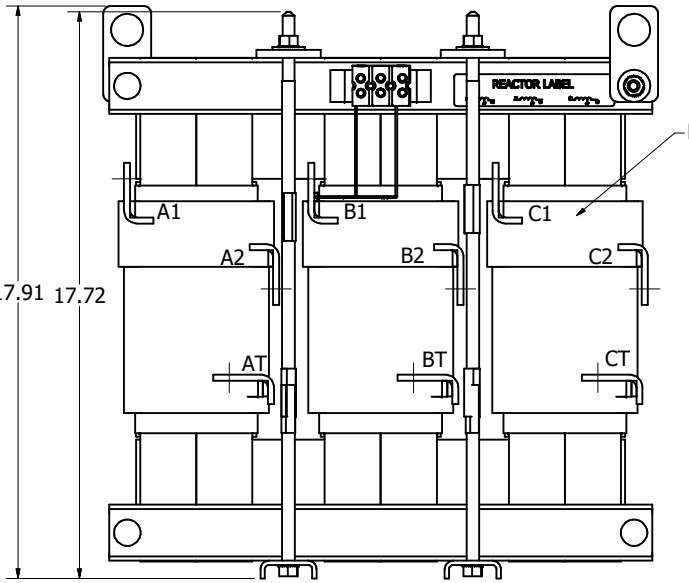


Markings For Reference Only

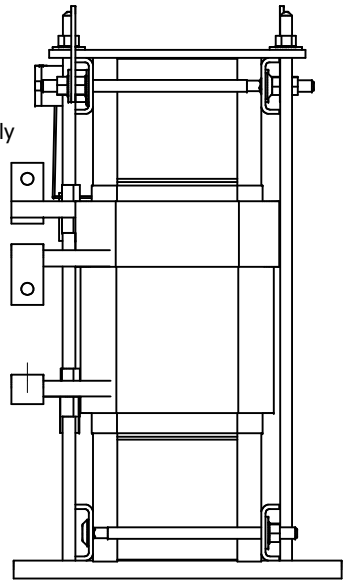

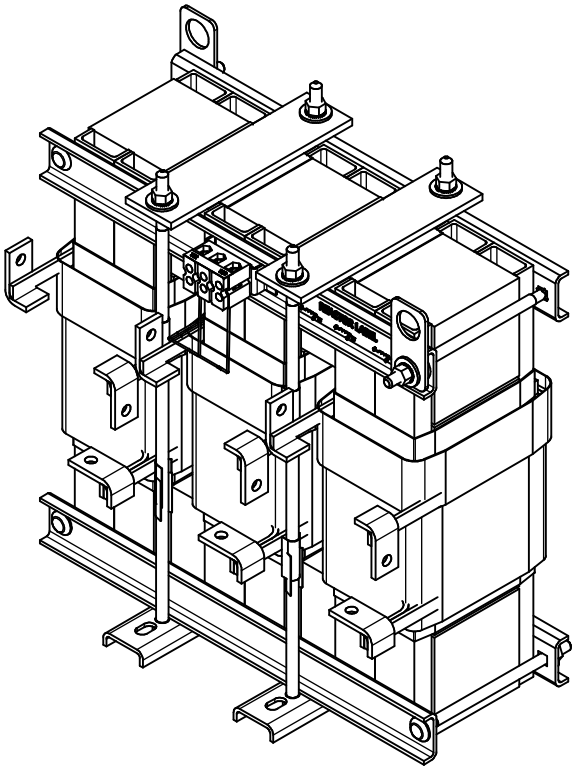

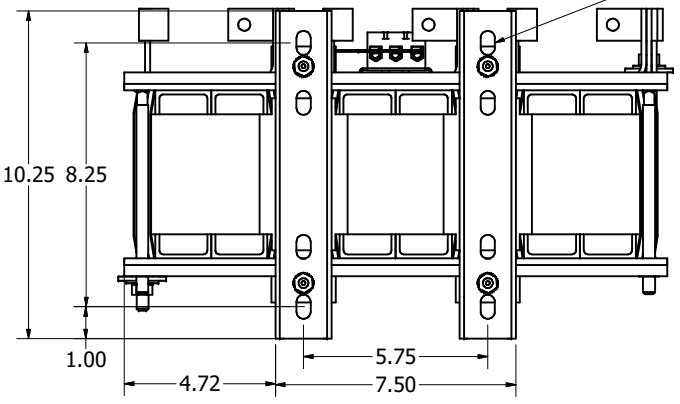


0.44" X 0.75" Slots
4 Places.

Thermal Switch
Terminal Block




Wire Range: 18 AWG To 4 AWG.
Torque: 20 LB-IN (2.3 Nm)
Switch Opens on Temperature Rise
Contact Rating: 6A @ 120 VAC

Customer Is Responsible For Installation to
Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

| NO | REVISION | DATE | BY |
|---|---|---|---|
| A | As Designed | 10/25/2023 | DSW |

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ± .25
.XXX ± .10
FRACTIONAL
± 1/16
ANGULAR
± 1°

TCI
An Allied Motion Company
W132N10611 Grant Drive
Germantown, WI 53022
© 2023 TCI, LLC

KDRX2FE
HSE Inductor, 480V, 125HP

| DRN. BY | DATE | |
|---|---|---|
| DSW | 10/25/2023 | 109517DG |
| SCALE: 1/3 | APRVD: | SIZE: C |

SHT 1 OF 1