




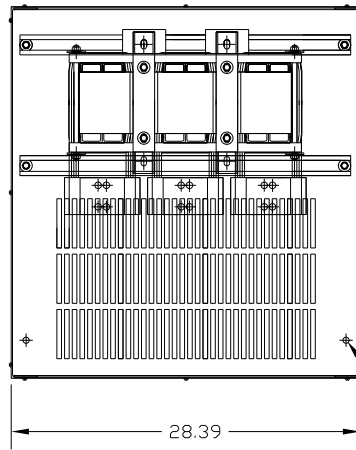

.50 DIA MOUNTING HOLES 4 PLACES.

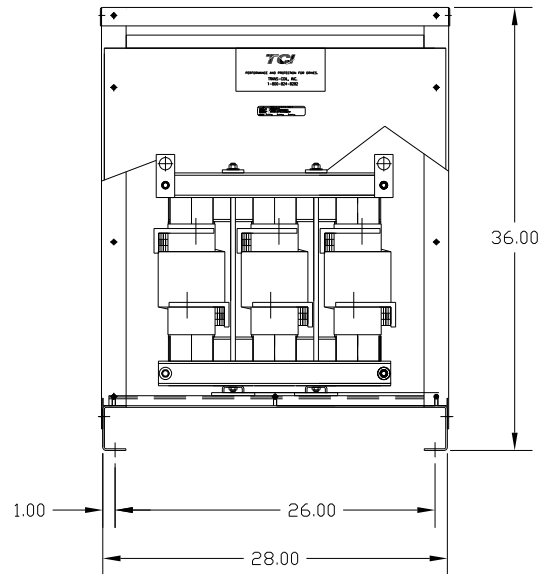

CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	TERMINAL HOLE SIZE	APPROX WT-LBS
KDRY41LC7V	690	1250	1200	1493	.53	625

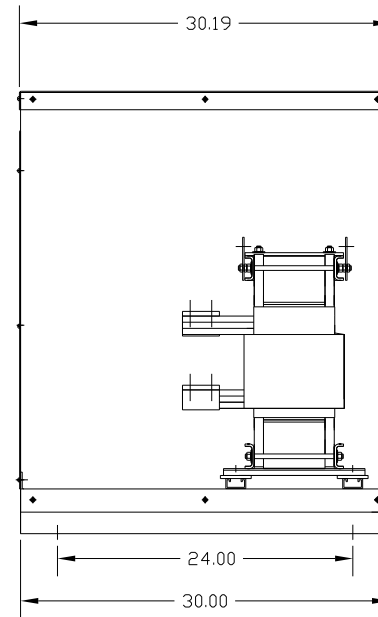

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

			TOLERANCES (EXCEPT AS NOTED)		 7878 N. 86th STREET MILWAUKEE, WI 53224 KDR DRIVE REACTOR, ENCLOSED 690V LOW Z, FRAME Y	
			DECIMAL			
			.XX ± .03			
			.XXX ± .01			
			FRACTIONAL		DRN BY: DSW DATE: 2/17/12 DWG NO: KDRY41LC7V SCALE: APPRVD: B SHT. 1 of 1	
			± 1/32			
			ANGULAR			
			± 1/2°			
NO	REVISION	DATE	BY			