


HP	TCI Part #	Rated Amps (A)	Max Amps (A)	uH+/-5%	Weight (LBS)
900	KDRY4STT	870	1080	95.3	540


System Voltage,
480V, 60Hz.

$\varnothing 0.44$
4 Places per
Terminal

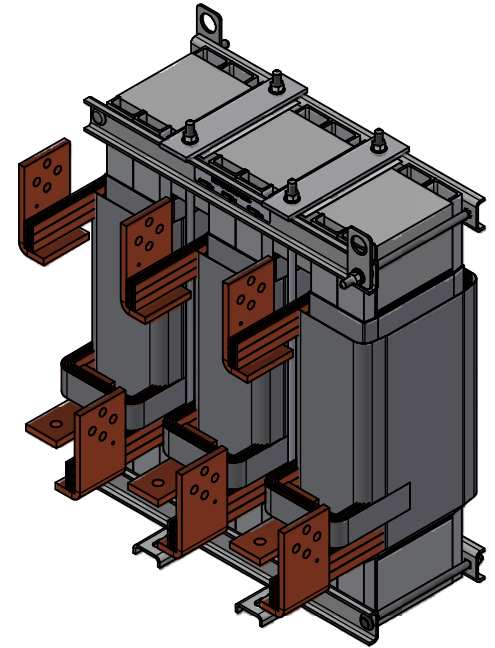

Customer Is Responsible For Installation to
Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED)		 W132N10611 (Rev. 11/16) Germantown, NJ 08022 © 2023 TCI, LLC					
				DECIMAL XX ± .25 XXX ± .10							
				FRACTIONAL ± 1/16 ANGULAR ± 1°				An Allied Motion Company KDRY4STT, HGP Stretched Inductor, 480V, 900HP			
				A As Designed NO REVISION	6/12/2023 DATE	DSW BY	109438-1DG SCALE: 1/3 DATE: 6/12/2023 DSW DATE: 6/12/2023	DATE: 6/12/2023 DATE: 6/12/2023	DATE: 6/12/2023 DATE: 6/12/2023	DATE: 6/12/2023 DATE: 6/12/2023	DATE: 6/12/2023 DATE: 6/12/2023