HP	TCI Part #	Rated Amps (A)	Max Amps (A)	uH+/-5%	Weight (LBS)
1000	KDRY5STT	966	1200	88.8	600

System Voltage,
480V, 60Hz.

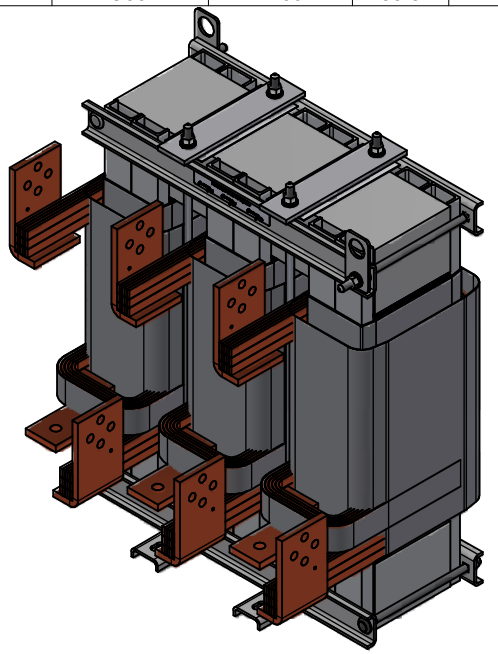

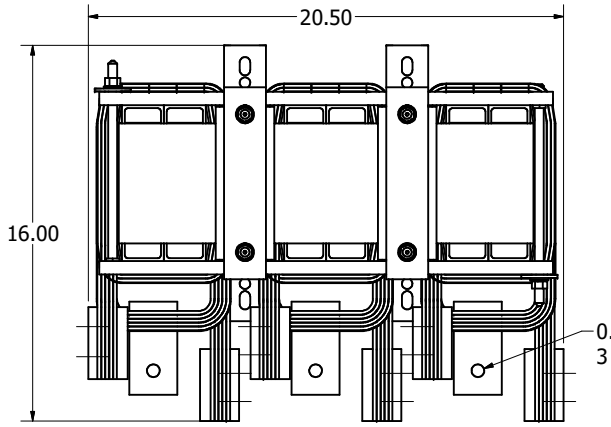

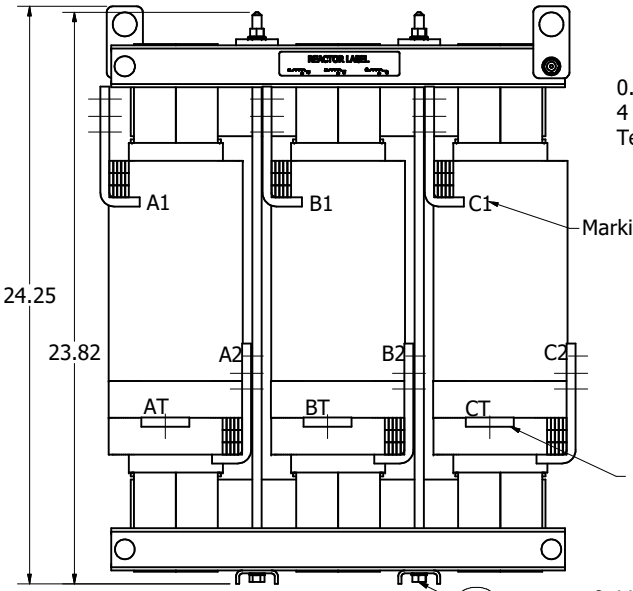

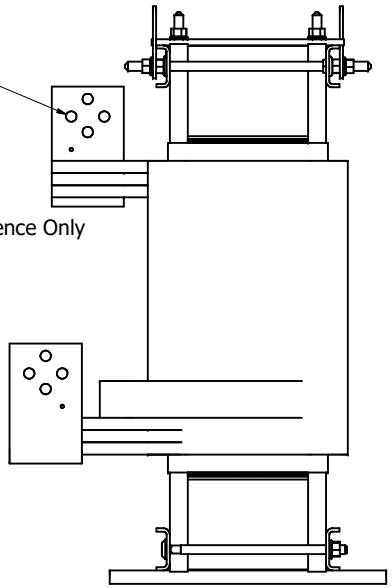

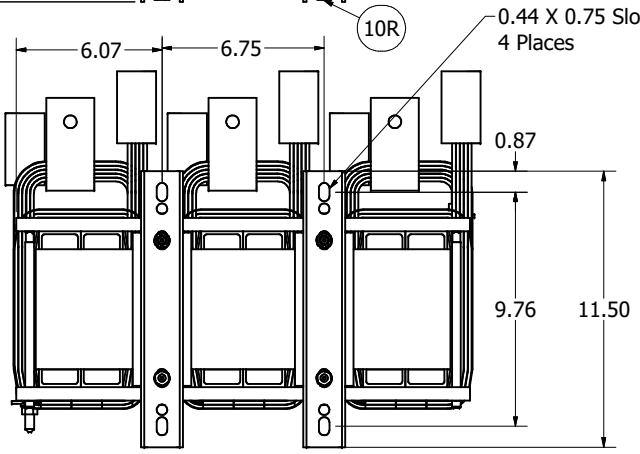

Customer Is Responsible For Installation to
Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

NO	REVISION	DATE	BY
A	As Designed	6/2/2023	DSW

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ± .25
.XXX ± .10
FRACTIONAL
± 1/16
ANGULAR
± 1°

TCI
An Allied Motion Company
W132N10611 Grant Drive
Germantown, WI 53022

© 2023 TCI, LLC

KDRY5STT, HGP Stretched Inductor,
480V, 1000HP

DRN. BY: DSW | DATE: 6/2/2023 | 108359-1DG
SCALE: 1/3 | APRVD: | SIZE: C | SHT 1 OF 1