
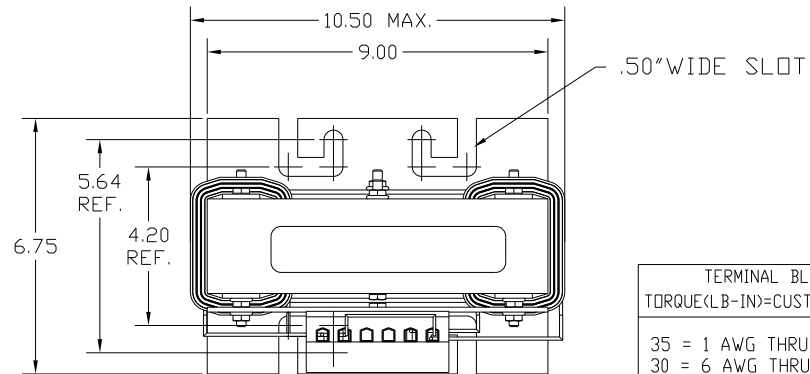




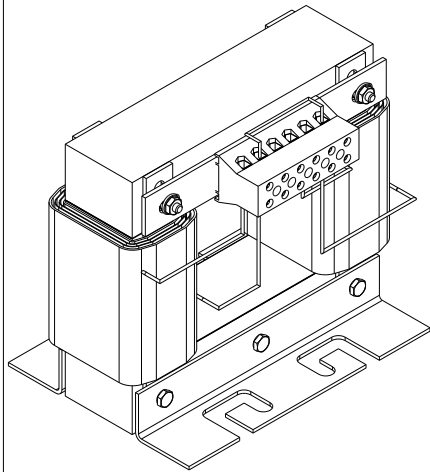


PART #	RATED AMPS	AMPS MAX	APPROX WT-LBS
KDSG3J	10.5	10.5	48

TRANS-COIL, INC. MILWAUKEE, WI WWW.TRANSCOIL.COM 800-824-8282		PERFORMANCE AND PROTECTION FOR DRIVES. KDR Drive Reactor CATALOG MOTOR HP AMPS 1PH, 60Hz, 600V Max, --- A Max. 40C Amb Max, 155C Rise	
(DATE CODE)	A1 A2	C1 C2	UL US CSA CE

TERMINAL BLOCK
TORQUE(LB-IN)=CUSTOMER WIRE

35 = 1 AWG THRU 4 AWG
30 = 6 AWG THRU 14 AWG
25 = 16 AWG THRU 20 AWG
20 = 22 AWG

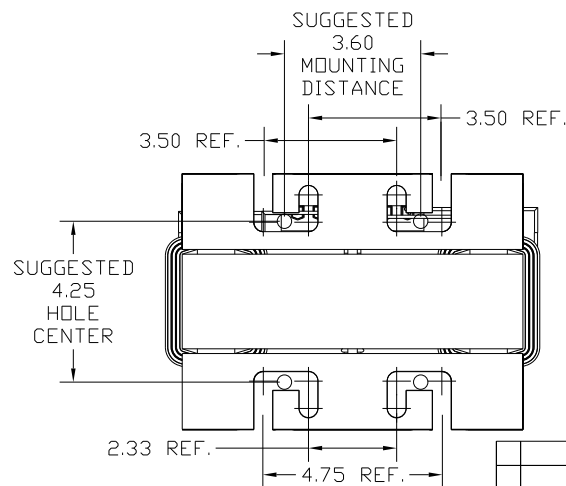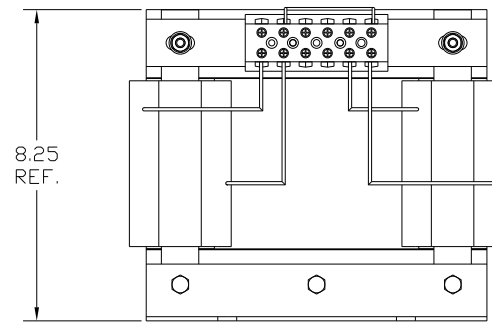

21A FILTER

TOLERANCES (EXCEPT AS NOTED)				 7878 N. 86th STREET MILWAUKEE, WI 53224	
DECIMAL					
.XX ± .03				SINGLE PHASE TR. REACTOR 10.7A , 480V (KDSG3J)	
.XXX ± .01					
FRACTIONAL				DRN BY DSW	DATE 11/30/09
± 1/32				SCALE TO FIT	APPRV C
ANGULAR				NO REVISION	DATE
± 1/2°				BY	104138DG
					SHT. 1 OF 1