
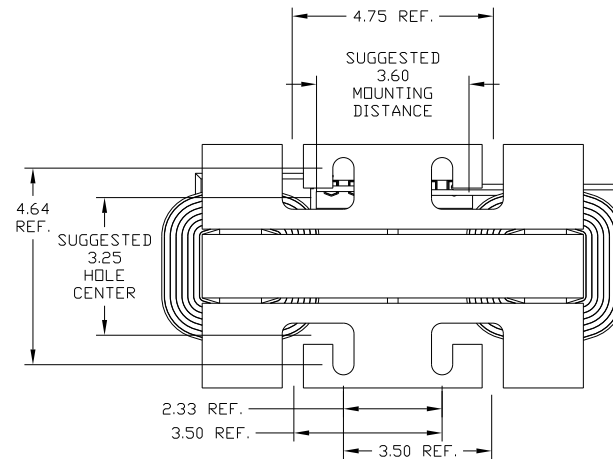
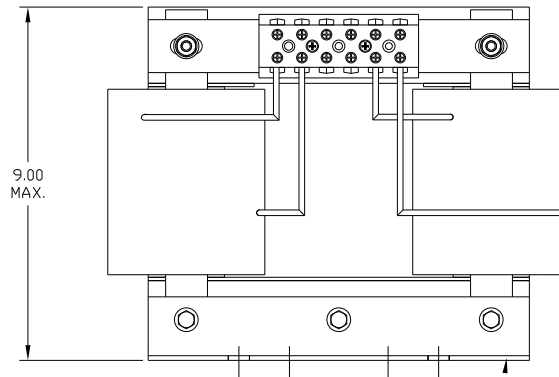
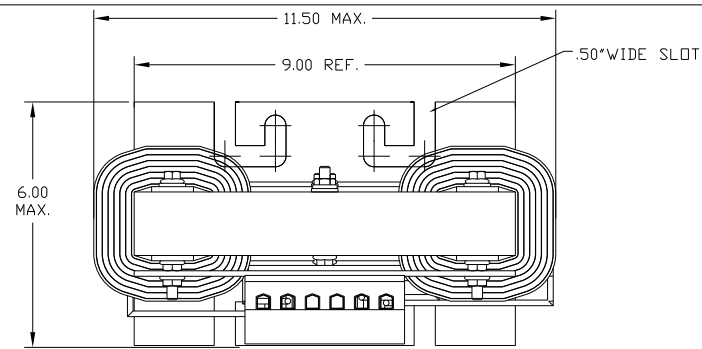


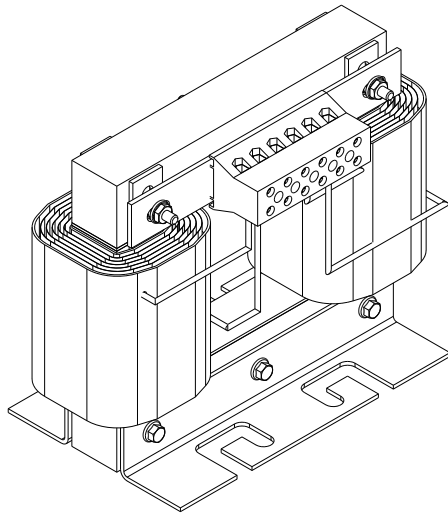

PART #	RATED AMPS	AMPS MAX	APPROX WT-LBS
--------	---------------	-------------	------------------

KDSH1B	25.98	26	40
--------	-------	----	----

TRANS-COIL, INC.
MILWAUKEE, WI
WWW.TRANSCOIL.COM
800-824-8282

PERFORMANCE AND PROTECTION FOR DRIVES.

KDR Drive Reactor

CATALOG# MOTOR HP AMPS

1PH, 60Hz, 600V Max, --- A Max.


40C Amb Max, 155C Rise

DATE CODE

A1 A2

C1 C2

TERMINAL BLOCK TORQUE(LB-IN)=CUSTOMER WIRE
35 = 1 AWG THRU 4 AWG
30 = 6 AWG THRU 14 AWG
25 = 16 AWG THRU 20 AWG
20 = 22 AWG

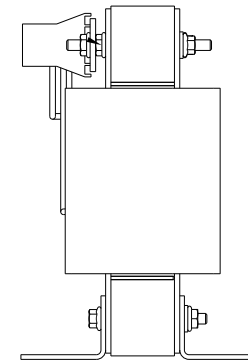

TOLERANCES (EXCEPT AS NOTED):		7878 N. 86th STREET MILWAUKEE, WI 53224 SINGLE PHASE LR REACTOR 26 MAX , 480V (KDSH1B)	
DECIMAL			
.XX ± .03			
.XXX ± .01			
FRACTIONAL		DRN BY DSW DATE 11/19/09 DWG NO 104130DG	
± 1/32		SCALE TO FIT	
ANGULAR		APPRVD BY C	
± 1/2°		SHT. 1 OF 1	