

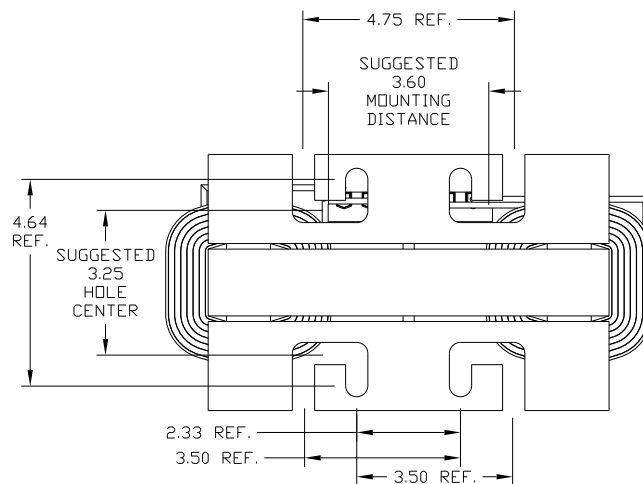
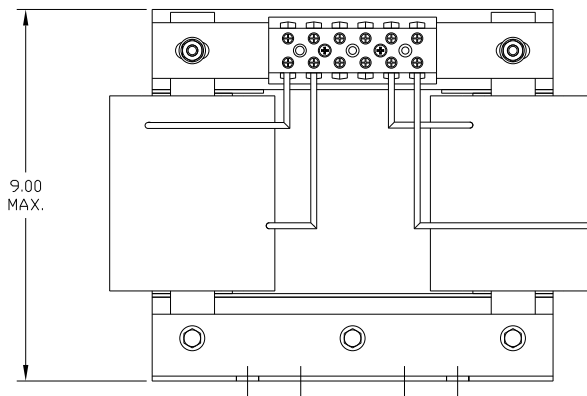
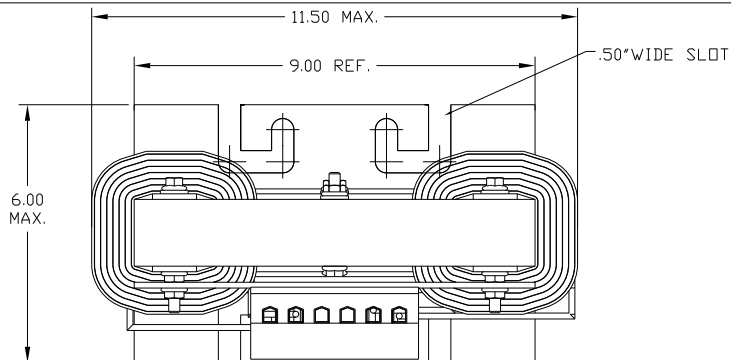
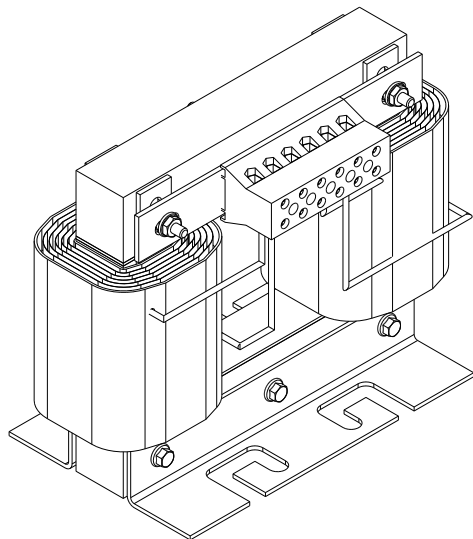


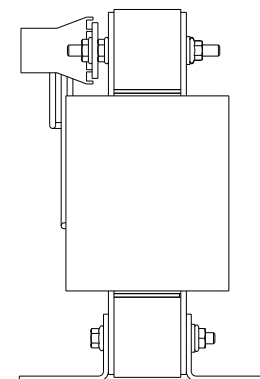

PART #	RATED AMPS	AMPS MAX	APPROX WT-LBS
--------	---------------	-------------	------------------

KDSH28B	28	28	30
---------	----	----	----



TERMINAL BLOCK TORQUE(LB-IN)=CUSTOMER WIRE
35 = 1 AWG THRU 4 AWG
30 = 6 AWG THRU 14 AWG
25 = 16 AWG THRU 20 AWG
20 = 22 AWG

					TOLERANCES (EXCEPT AS NOTED):		 7878 N. 86th STREET MILWAUKEE, WI 53224	
					DECIMAL		SINGLE PHASE LR. REACTOR 28 MAX , 240V (KDSH28B)	
					.XX ± .03			
					.XXX± .01			
					FRACTIONAL			
					± 1/32			
					ANGULAR		DRN. BY	
					± 1/2°		SCALE	
NO	REVISION	DATE	BY				DSW 12/1/10	
							APPRVD	
							C 104551DG	
							SHT 1 of 1	